## A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY, AND MANUFACTURES.


Vol. XLI.—No. 9.

NEW YORK, AUGUST 30, 1879.

#### BESSEMER STEEL.

The Bessemer process of making steel stands prominent among modern inventions as a great success, both practically and financially. From a scientific standpoint it commands our attention, as being a remarkably simple and yet very effective process. Just now the Bessemer works of this country are very active, and it seems likely that the existing works will prove insufficient to supply the increasing demand for Bessemer steel.

The facts given in this connection were furnished us by the Albany and Rensselaer Iron and Steel Company, of Troy, N. Y., portions of whose works are shown in the engraving on this page. Two converters are used in the Bessemer steel department of this establishment, having a capacity of seven tons each. They are about 9 feet external diameter and 16 feet high. They are made of a refractory material, the walls being about 1 foot thick. The exterior iron shell is made of 1/3




to 34 inch wrought iron plates, and is mounted on trunnions, so that it may be inverted by a hydraulic cylinder by means of a rack and pinion.

The construction of the converter is shown in the sectional views, Figs. 2 and 3. At one end it has a nose 18 inches in diameter, and at the other a tuyere box, communicating with the blowing engine through one of the trunnions.

Each bottom has 12 tuyeres, 6 inches in diameter and 24 inches long, made of fire clay, fire sand, and ganister, a stone belonging to the quartzite group. The tuyeres are each pierced by twelve 3/8 inch air holes through which the blast enters the converter. The converter is turned down, as shown in Fig. 2, to receive its charge of iron; it is of sufficient size to contain the entire charge below the nose and tuyeres.

The process of decarburizing iron requires about twenty [Continued on page 137.]

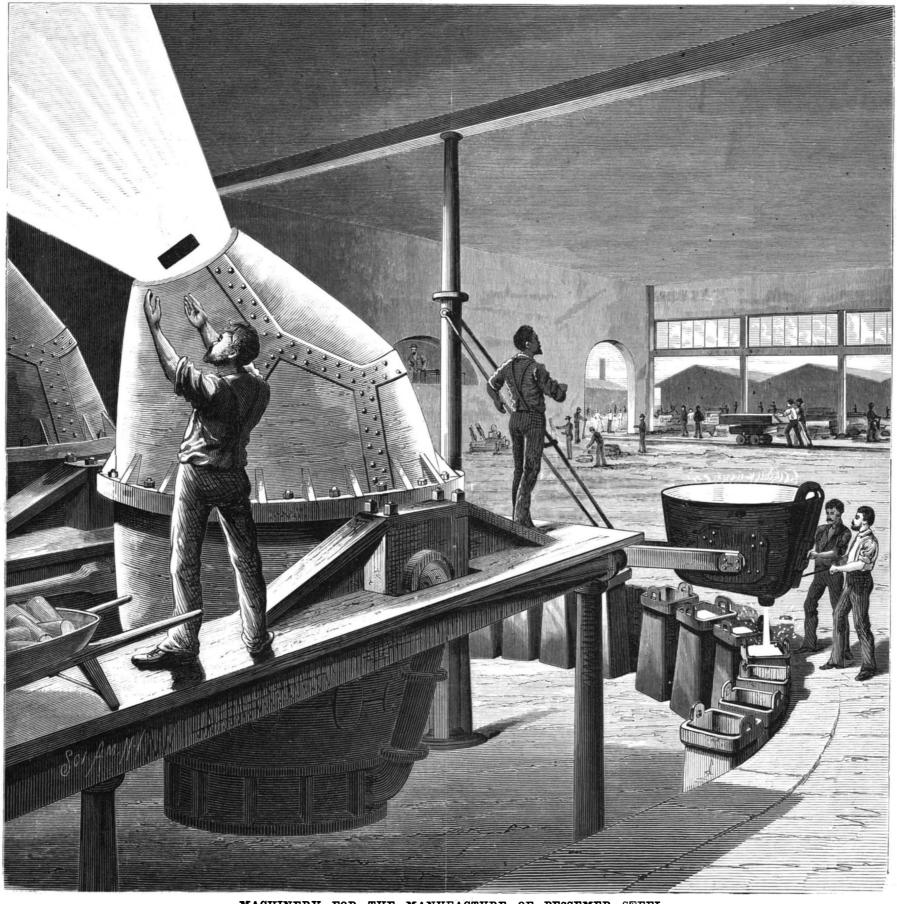

MACHINERY FOR THE MANUFACTURE OF BESSEMER STEEL.

# Scientific American.

ESTABLISHED 1845.

MUNN & CO., Editors and Proprietors.

PUBLISHED WEEKLY AT NO. 87 PARK ROW, NEW YORK.

O. D. MUNN.

A. E. BEACH.

# TERMS FOR THE SCIENTIFIC AMERICAN.

Clubs.-One extra copy of THE SCIENTIFIC AMERICAN will be supplied gratis for every club of five subscribers at \$3.20 each; additional copies at same proportionate rate. Postage prepaid.

Single copies of any desired number of the SUPPLEMENT sent to one

Remit by postal order. Address
MUNN & CO., 37 Park Row New York.

#### The Scientific American Supplement

The Scientific American Supplement is a distinct paper from the Scientific American. The Supplement is issued weekly. Every number contains 16 octavo pages, with handsome cover. uniform in size with Scientific American. Terms of subscription for Supplement, 8.00 a year, postage paid, to subscribers. Single copies 19 cents. Sold by all news dealers throughout the country.

Combined Rates.—The Scientific American and Supplement will be sent for one year, postage free, on receipt of seven dollars. Both papers to one address or different addresses, as desired.

The safest way to remit is by draft, postal order, or registered letter. Address MUNN & CO., 37 Park Row, N. Y.

#### Scientific American Export Edition.

The SCIENTIFIC AMERICAN Export Edition is a large and splendid periodical, issued once a month. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1.) Most of the plates and pages of the four preceding weekly issues of the SCIENTIFIC AMERICAN, with its splendid engravings and valuable information; (2.) Commercial, trade, and manufacturing announcements of leading houses. Terms for Export Edition, \$5.00 a year, sent prepaid to any part of the world. Single copies 50 cents. FF Manufacturers and others who destret to secure foreign trade may have large, and handsom ely displayed announcements published in this edition at a very moderate cost. The SCIENTIFIC AMERICAN Export Edition has a large guaranteed circulation in all commercial places throughout the world. Address MUNN & CO., 37 l'ark Row, New York.

VOL. XLI., No. 9. [New Series.] Thirty-fifth Year.

NEW YORK, SATURDAY, AUGUST 30, 1879.

#### Contents.

(Illustrated articles are marked with an asterisk.)

America, discovery of	Living, cost of 138
America's future, Gladstone on. 137	Logs, a big jam broken 130
American Institute Exhibition 130	Magnets, steel for (17) 139
Arsenic in water colors 131	Meteors, August 137
Astronomical notes 136	Microscope, power of (18) 139
Aurora, the 133	Miter cutter, new* 134
Australian Exhibition, the 129	Natural history notes 135
Bark lodge, how to make 134	Negatives on paper
Battery, electromo. force of (1) 139	Nevada saline valley, a 136
Battery, Leclanche (17) 139	Nuts
Bessemer steel*	Opical delusion. Explanation 133
Bonito, catching the 138	Optical delusion, new* 133
Bread, baker's vs. home made (8) 139	Paradox, a little
Butter package wanted 138	Platinum in California 138
Clocks, a couple of 132	Printer's rollers (14) 139
Coal, economical use of 135	Propeller screw, new*
Color blindness, relief of 130	Roofs, leaky, to stop (6) 139
Cream, who will can?	Rose tree, an ancient 136
Cycloscope, the* 131	Scaffolding, screw*
Double stars, color of 138	Ships, refrigerating, fallacy of 129
Electricity for useful purposes . 138	Solar spectrum, new map of the 136
Fall of 260 feet, a	Stains, to remove from hands (2) 139
Ferry boat, steam, first 132	Steel, Bessemer* 127
Fireproof partitions	Swim, a difficult
Fish, a new	Tar varnish (5)
Freezing by salt and ice (3) 139	Tea roses, failure of 149
Freezing mixture (11) 139	Telegraph : electro-chemical (17) 139
Fungi in man 128	Telegraph line, resistance of (10) 139
Goat antelope, Japanese* 135	Telegraph Mine, Old
Granite ware (9) 139	Trade, balance of, in men 128
Gun, the Thunderer's* 130	Tree, giant* 135
Inventions, engineering 137	Voyage, a rapid 129
Inventions, mechanical 132	Wire, strength of (15)
Inventions, miscellaneous 134	Worcester free institute, the 128
Is it paying?	
pv g	

TABLE OF CONTENTS OF

#### THE SCIENTIFIC AMERICAN SUPPLEMENT

#### No: 191,

For the Week ending August 30, 1879.

Price 10 cents. For sale by all newsdealers.

I. ENGINEERING AND MECHANICS.—New French Torpedo Boats.
Railway Brake Experiments.
Casting White Metal around Steel Axles a Cause of Breakage.
Friction.
Combustion of Coal in Boiler Furnaces.
Coal Mining at Mt. Diablo, California.
Triangular Blast Holes.
Aerial Navigation. By F. W. BREAREY.
Fireproof Pillars.
Furnace for the Combustion of Refuse Matters of Cities. 1 illus.
New Canals in Russia.

II. ELECTRICITY AND MAGNETISM.—Sir William Fothergill Cooke.
Sketch of the life and inventions of a pioneer in telegraphy.

The Electrical Cabinet. By Geo, M. HOPKINS. Many illustrations of parts of cabinet and apparatus made therewith. The electric engine. Magneto machine. Sounder. Electric bell. Galvanometer. Magnetic curves. Induction coil. Axial magnet. Receiving telephone. Transmitting telephone. Microphone. Electrical Pendulum. etc. lum, etc.
The New Form of Leclanche Battery. By Dr. H. Tobler.

III. TECHNOLOGY AND CHEMISTRY.—Felt Hats. How they are made, and the diseases suffered by the workmen. Ry L. DENNIS, M.D.

Paper Bags, and How They are Made. Fig. 1. The paper bag machine. Fig. 2. Blanks for paper bags. Fig. 3. Koch's paper bag machine. Fig. 4. Armstrong machine. Fig. 5. Jaeger's paper bag machine. Fig. 6. Lockwood's paper bag machine. Fig. 7. Crowell bag. Fig. 8. Forms of paper bags. Fig. 9. Hiedinger's paper bag machine. Fig. 10. Operations of Biedinger's machine. List of paper bag machines patented in the United States.

patented in the United States.

Stereotyping and Stereotypers' Machinery, Stereotype metal. Stereotype planing and sawing machine. Routing machine. Saw. Saw table. Shaving machine. Shooting board. Methods. Clay or clay and plaster process. Fapter mache process. Iron electrotypes. It figs. Characteristics of Animal Fiber.

Purification of Mercury.

Preservation of Wood by Creosote.

Preparation of Ammonia from Distilled Water. By J. S. Thompson. Nickelizing Without Electricity.

IV. PHYSICS.—Physical Society Notes.
New Measuring Polariscope. By Prof. W. G. Adams.
The Distribution of Heat in the Spectrum. By Sir John Conroy.
The Measurement of the Thermo Spectrum. By Capt. Abney, R.E.
Electrical Induction. By M. GRANT.
Laws of Magnetic Force. By Dr. Shlettle.
The New Theory of Terrestrial Magnetism. By Prof. Rowland.
Rotation of Copper by Magnets. By. Mr. Ballley.
Internal Current of Battery. By Mr. Conrad Cooks.
Experiments on the Flow of Solids.
Absorption of the Violet Rays by the Atmosphere.

V. AGRICULTURE, HORTICULTURE, ETC.—The Universal Horse Rake, 1 figure. GRICULTURE, Aske, 1 figure.
The Farmer's Pests.
New Remedy for the Potato Beetle.
Vase Flower Bed at the Paris Exhibition. 1 illustration.

VI.—ARCHITECTURE.—Royal Architectural Museum.
Sketching Club. Sketches of Ornament from Salisbury, etc. 2 illustrations.

VI.—BIOLOGY,—The Begianings of Life. IV. By Professor EDMOND PERRIER, Beings intermediate between animals and plants. (Continued from SUPPLEMENT No. 190). 6 illustrations.

VII. MEDICINE.—The Brooklyn Treatment of Diphtheria. By PAUL H. KRETZSCHMAR, M.D.

#### BALANCE OF TRADE IN MEN.

It is a grand thing for any country to be able to show a balance of trade in material products on the home side of the sheet. To be able to sell, year by year, two or three hundred million dollars' worth of stuff in excess of what we have to buy abroad, as the United States can do, is substantial evidence of our progress in solid wealth.

The nation is justified in rejoicing over so favorable a showing. But there is another phase of our relations with the rest of the world, which tells still more remarkably in our favor, and which promises to aid in the near future, even more than it has done in the past, in building up for us a grand and abiding prosperity. There is nothing that contributes so much to the wealth of a nation as hopeful, energetic, thrifty men and women; and the Old World is daily sending us these by the ship load. At this port alone, during the year ending with May last, there were landed nearly a hundred thousand immigrants, mostly from the countries of Northern Europe, and this year the influx is still greater.

And what is more encouraging to us than the numbers of these incoming citizens, is their high average character. The social, military, and industrial conditions in Europe are such that a better class are emigrating now than formerly, and the indications are that still larger numbers of intelligent farmers and skilled workmen will seek our shores in the immediate future. It is but a little while since a single party of German-Russians, 350 in number, passed through this city to make their homes in the West, carrying with them money and property to the value of \$400,000. The influx of well-to-do English and Scandinavian farmers, during recent years, has been unparalleled, and it promises to increase.

Meanwhile skilled mechanics are coming to us, not only singly, but in large companies More than 150 French and English families recently took up their residence in New Albany, Ind., to engage in the plate glass industry established there. The day before this writing (August 6), 22 families and 20 single men, in all over 100 skilled workmen, arrived here on their way to Bridgeport, Conn., to which place they had emigrated from Sheffield, England, at the instigation of the Frary Cutlery Company, of Bridgeport. The men were, for the most part, between 20 and 35 years of age, picked workmen, intelligent, and well dressed. They were preceded by a smaller party a few weeks ago; and it is said that in the fall about 50) more skilled cutlers will be brought over by the same company from England and Germany.

These men come to America not because they cannot live at home, but because they and their children can live to better advantage here. And they come provided with certain employment, for the capital of the establishment which they had worked for in Sheffield comes with them. Thus, with the migrating workmen, a new center of industry, if not a new industry, is brought to our shores; and to a corresponding extent the necessity is removed for sending abroad for fine cutlery.

These are but scattering drops of the grand industrial rain, which has done so much, and which promises to do so much more, toward making this country the garden spot of the world for the industrial arts to thrive in. It is impossible to overestimate the national advantage of such additions to the productive wealth of a new country. With the best of wishes for the prosperity of the nations of the Old World, we cannot but be glad to receive from them contri butions of such intrinsic and lasting value. May the balance of trade in men be the last to turn against us.

#### A LITTLE PARADOX.

M. Piateau, Member of the Academy of Sciences of Brussels, communicates the following note to La Nature: If, says he, perpetual motion were simply defined as the motion of a body, which, after receiving an impulse, continues to move indefinitely by virtue of its inertia alone, I should say, that under these conditions, it was realizable. As well Almagro. All these letters are very interesting, being known, all movements that we produce ultimately come to an end, because they inevitably meet with resistances which destroy them; so that to keep up a motion for a long time ing to the remarkable courage exhibited by the women the intervention of a foreign force is necessary in order to during the expedition of Cortez, while all the men were continually restore to the moving body that portion of the motion which resistances have taken from it. It is thus that the oscillations of a clock's pendulum are kept up by the 225 pages, in which we find 29 autograph letters and reports small impulses of the escapement. But if the foreign force, that resistances have caused it to lose, is employed to annul etc.; a map of the fortress in which the precious stones of these resistances, the body will continue to move as long as the foreign force shall neutralize the resistances. Now we the Archipelago of the Antilles, and the Straits of Magellan, may make use of a force that is ever present, such as a current derived from a river; and in this case the moving body freed from resistances will continue to move indefinitely by virtue of its inertia alone.

Let us take an example; let us conceive of a horizontal disk movable around a vertical axis which is fixed to the of our leading institutions of technology, wherein the educenter of its lower surface; and let there be hollowed out a cation commended could be had. It was not intended to hemispherical cavity of a few millimeters diameter in the center of its upper surface. Now let us suppose the apparatus located by the side of a river, where it is put in communication with the latter by means of a tube leading from take, as well as an injustice, to omit the Worcester Free a reservoir placed at a level lower than that of the lowest Institute, a school which ranks with the best technological tide, the reservoir being constructed so as to furnish, by institutions in the land. Our high opinion of the value of means of an orifice at the bottom, a uniform and strong the work done there has been too frequently and too plainly flow, which shall be able, when we wish it, to cause the disk expressed, we should think, to allow even a suspicion of an to revolve very swiftly.

This being done, before we allow our water course to act, let us spin a top very rapidly, place its point in the small hemispherical cavity, immediately cover the top with a bell glass whose axis coincides with that of the apparatus, and keep this glass firmly in position by some means or other Finally, by the aid of one current of water, let us set the disk, along with the bell glass, in motion in the same direction as the top. As may be conceived, after a certain length of time, the movements of the disk, the top, and the air confined beneath the bell glass, will become equalized. Then the top will meet no further resistance at its point, since the support on which it rests is revolving with exactly the same speed and in the same direction; it will no longer experience any resistance from the surrounding air, since the latter will also possess the same angular velocity, and we will thus have the curious spectacle of a top remaining indefinitely in equilibrium on its point; and it will continue to revolve, not because any lost motion is restored to it, but because it does not lose any. This will be a perpetual motion according to the definition given at the beginning of this note.

#### <del>\* + \* + +</del> FUNGI IN MAN.

The human ear is sometimes attacked by a disease which shows itself in the form of a running sore; in many cases the tympanum is destroyed and hearing lost before the nature of the malady is discovered. The disease is due to the growth of especially thrives when, from any cause, the secretion of wax in the ear is stopped or hindered. The microscope is a valuable assistant in the discovery of this fungus.

Consumption, the most disastrous malady that afflicts hu manity, is now said to be caused by a yeast plant that flourishes in the blood. The presence of this fungus in the blood is readily shown by the microscope, and now forms the subject of careful study among physicians.

Dr. Ephraim Cutter, M.D., of Boston, Mass., has devoted much labor to this subject, and, we understand, has recently produced micro-photographs of the fungus with Tolles' remarkable 1/15 objective.

We believe that Dr James H. Salisbury, of Cleveland, Ohio, was among the earliest to detect and describe this curious yeast plant of the blood.

#### New Documents Relating to the Discovery of America.

A very important publication, says La Nature, has recently been made in Spain under the supervision of the Minister of Public Instruction. It is a collection of letters of Christopher Columbus and his contemporaries, and reports made during the 16th century by the governors of the American provinces. The originals of these letters and reports are now in the state archives at Seville. The work, entitled Cartas de India (Letters from the Indies), forms a large folio volume of 1,754 pages, and contains the following documents of great interest:

1 Two autographs of Columbus addressed in 1502 to Ferdinand and Isabella, the first urging the necessity of suitable measures for increasing the population of the isle of Española (St. Domingo), the second containing a dissertation on the art of navigation. 2. A letter from Amerigo Vespucci to Cardinal Ximenes di Cuneros, Archbishop of Toledo, dated at Seville, 1508, regarding some merchandise to be sent to the Antilles. 3. Two letters from Fra Bartholomeo de Las Casas, Archbishop of Nicaragua, to the Infante Don Filippo, dated at Gracias á Dios, in Guatemala. 4. Two letters from Bernaldo Diaz del Castillo, one of the warriors of the small army of Cortez and the author of a history of Mexico. These two letters are addressed to Charles V, 1552, and to Philip II., 1558. 5. Let ters from the bachelors, Don Pedro de Gasca and Don Christopher Vaca, of Casca, dated at Quito, 1541, and Cusco, 1542, announcing to Charles V. the death of the Marquis Don Pizaro, and the insurrection of Don Diego de written by eyewitnesses of the occurrences which they narrate. 6. A very curious letter from Dona Isabella Quivara, relatprostrated by sickness.

The work contains 652 pages of text, and an appendix of of different historic persons; 28 autograph pages from instead of communicating to the moving body the motion Columbus, Vespucci, Las Casas, Diaz del Castillo, Ximenes, the Incas were found; and, finally, maps of the Amazons, executed in the 16th century.

#### The Worcester Free Institute.

In an article on the advantages of a mechanical education, in a recent issue of this paper, mention was made of several give a full list of such institutions, much less to intimate that any not named were inferior to those named. Had such been the intention, it would have be en a serious mis intentional slight of that nature on our part.

#### FAILURE OF TEA ROSES.

HABITS OF FULLER'S ROSE BEETLE, -(Aramigus Fulleri, Horn.) BY PROF. C. V. RILEY.

which has become a very important and lucrative branch of to be due to the larva of a little gray snout beetle, belonging turists. to the family Otiorhynchidae, and shown in its different stages in the accompanying figure.

Mr Peter Henderson, of Jersey City Heights, N. J., has himself suffered very much from the work of this insect, the winter upon the subject. The following quotation is from one of my letters replying to his inquiries:

'The first knowledge which I obtained of this insect was through our mutual friend, Mr. A. S. Fuller, who sent me specimens in 1875, the species being then undescribed. In 1876 it was described under the name of Aramigus Fulleri, by Dr G H. Horn, in the proceedings of the American Philosophical Society, vol. xv., page 94. Mr. Fuller had found it in greenhouses, and somewhat injurious to camellias. It seems to be quite widespread, occurring from the Atlantic at least as far west as Montana, and its habit of injuriously affecting roses and other greenhouse plants must be looked upon as a comparatively recent acquirement. Such instances of newly formed habits are constantly presenting themselves to me in my studies of insects. The beetle seems to be purely American, and the genus Aramigus was, in fact, erected for it and another species (Aranigus tessellatus) of about the same size, but of a silvery white color, with faint green hue, which I have found in Kansas upon the well known 'resin weed.' The beetle belongs to the same family and is pretty closely allied to a well known European beetle (Otiorhynchus sulcatus, Fabr.), which is larger and darker in color, and is also very injurious to greenhouse plants, as well as to some grown out of doors. This species also occurs in this country, as I have specimens that were taken in Massachusetts. It is the habit of all these beetles, so far as their habits are known, to work in the roots of plants while in the larva state, just as your aramigus does. The eggs are doubtless laid upon the roots by the female beetle, which burrows into the ground for this purpose. Upon inquiry I find that what is evidently this same beetle has been more or less injurious to roses in and about Washington, and that Mr A. Jardin was obliged to give up the growth of tea roses here, a number of years ago, on account of its injuries.'

In Bennet's excellent essay on "Rose Growing in Winter," he fails to mention this insect among the "causes of failure." Mr Henderson does not hesitate, in a recent number of the Gardener's Monthly, after a thorough investigation of the subject, and a correspondence with some of the best rose growers in six different States of the Union, to express his belief that in a large majority of cases failure is due to this insect alone.

The only remedy that has been employed hitherto is to persistently catch and destroy the perfect insects, and the experience of Mr. John May, who has for five years been fighting it in this way at Madison, N. J., is to the effect that no substance will destroy the insect in its larva state without at the same time injuring the plant.


A study of the habits of this insect, which I have been able to make through the courtesy of Mr. Henderson, who sent me abundant material, enables me to add to his excellent account some facts that are both interesting and of a practical value. The most serious injury is done by the larvæ, which feed principally upon the more tender rootlets, and thus attack the plant in its most essential parts. This work being underground, is so insidious as to easily account for the fact that it has been generally overlooked.

I have had a quite healthy rose bush totally destroyed in three weeks' time by about three dozen of the larvæ, which were placed in the pot containing it. The symptoms that are manifest above ground when the grub is at work are partial stagnation of growth, weak pale shoots, and generally barren flower buds; and when these symptoms manifest themselves strongly a number of the grubs will be found if the plant be dug up and shaken. The parent beetles, like most other snout beetles, live for a considerable time, as I have kept them in confinement for nearly three months. They are nocturnal in habit, being quite active and feeding only after dusk. They shun the light during the daytime, and hide under the leaves or cling tightly to the branches or in some fork near the base of the plant, always in such position as not easily to be observed. Upon disturbance they drop to the ground, draw up their legs, and "play 'possum," remaining motionless for some time, and looking very much like a small lump of dry earth, the color adding greatly to the resemblance.

This habit of simulating death upon disturbance is common to many other insects of this family. They feed upon the leaves, but do more injury by severing them than by the amount of foliage consumed. The eggs are laid in flattened batches, consisting of several contiguous rows, and each batch containing from 10 to 60. The individual egg is smooth. yellow, ovoid, and about 1 mm. in length. The female rate, including storage. Goods will be received at the latshows a confirmed habit of secreting her eggs, which are ter Exhibition building on the 1st of June, 1880. thrust between the loose bark and the stem, especially at the base just above the ground. In the twenty odd batches fairs in other countries will be liberally afforded at Melwhich I have examined they have invariably been thrust bourne. The protection of inventions capable of being paeither between the loose bark and as above described, or into tented is fully secured. Should the United States decide

which some of my experiments were made. More rarely ary, 1880. Goods from the Pacific slope and parcels of great they are laid between the earth and the main stem just at the value and small bulk may be shipped via San Francisco by Within the last five or six years frequent complaints have surface of the ground. The eggs are so firmly glued to- the Pacific Mail Steamship Company, which runs a monthly been made of the failure of tea roses, the cultivation of gether and to the place of deposit that they are not easily line of steamers from San Francisco to Sydney. Show cases, seen, and are with extreme difficulty detached. It is for shelving, belting, etc., may be procured in Melbourne at flower culture. This failure has recently been ascertained this reason that they have escaped the notice of rose cul- low rates, at the cost of the exhibitors.

These eggs require about a month to hatch, and the new born larva, which is of a pale yellowish color, with light brown mouth parts, is quite active, and immediately burrows into the ground, and acquires, very soon after, a bluish and I have had considerable correspondence with him during | hue. Just how long this larva requires to attain full growth I have not been able to ascertain, but, in all probability, it remains at least one month, and probably several more, in the ground, where the pupa state is finally assumed.



Aramigus Fulleri.-a, larva; b, pupa; c, beetle, side view; d, same, dorsal view, the outline between showing natural size; e, eggs, enlarged and natural size f, left maxilla of larva, with palpus; g, underside of head; h, upper side of same, enlarged (after Riley.)

As the injury of this insect has been mostly to roses under glass, there will be found no great regularity in the periods of its transformation under such circumstances. In point of fact it is found in all stages during the winter and early spring months. Yet that, in a more general way, there are cycles of development, is proved by the fact that during a visit to Mr. Henderson, which I made last May, neither beetles nor eggs were to be found, though egg shells under the loose bark at base of the plants were common.

While the destruction of the parent beetles, when persistently followed up, is an excellent preventive of the injuries of the larva, and strongly to be recommended, yet when roses are extensively grown, some beetles are sure to escape detection. It is evident from the facts here set forth in relation to the eggs, that we have still another and more effectual preventive measure within our reach, namely, the destruction of the eggs before they hatch. For this purpose I would recommend the tying of a few thicknesses of tape or of narrow pieces of rag, or even stiff paper, around the butt of the plant, the bandages to be examined every three weeks, and detached and burned, if eggs are found in them. Where the number of plants is large, this destruction of the eggs might be expedited by the employment of traps, consisting of small stakes, around which such layers of cloth or paper are tied. These should be thrust into the ground near the main stem of the plant, and can be collected once every three weeks, thrown into a tub of hot water, subsequently dried, and used again without untying the bandages. Or, again, the materials always at hand in a florist's establishment may be employed, for I doubt not but that a few folds of oil paper placed in a slit made in an ordinary wooden label, and this stuck into the ground at the base of each plant, would form an excellent lure to the female in ovipositing. I am indebted to W. G. Le Duc, Commissioner of Agriculture, for the electrotype of the figure here used, and which was prepared for my report to the Department.

#### The Australian Exhibitions.

Mr. O. M. Spencer, United States Consul General at Melbourne, Australia, transmits to the Department of State a very full report of the proposed Exhibitions at Sydney and Melbourne. The first opens on the 1st of September, 1879, and will close on the 31st of March, 1880. That at Melbourne opens on the 1st of October, 1880, and closes on the 31st of March, 1881. This Exhibition will be held in the Carlton Gardens, comprising an area of 65 acres. Nearly all of the leading European governments have signified their and had borne the arrow in its body in its flight over the Medintention of being present by royal commissioners. All of the Australasian colonies have entered heartily into the enterprise. The English government has taken a warm and decided interest in it. The Prince of Wales and others of the royal family will visit the Exhibition. The Duke of Genoa will come out in an Italian man-of-war, and France and Germanywill be represented in a similar manner. The relation which exists between the Sydney and Melbourne exhibitors is one of generous rivalry and cordial co-operation. The two cities will soon be connected by railway. There are several lines of steamships now plying regularly between the two places, with low rates for freight. The expense of transferring goods from Sydney to Melbourne will be mode-

All the usual facilities accorded at previous international any other crevice that could be found; as, for instance, that not to send out a man-of-war, it is advisable to ship all heavy ployment.

formed by some paper around the edge of the bell glass in goods in sailing vessels, via the Cape, not later than Febru-

#### On The Fallacy of Refrigerating Ships for the Destruction of Yellow Fever Germs.

There are reasons to believe that it is well nigh impossible to eradicate by refrigeration the spores of yellow fever from the holds of thoroughly infected ships; although, with the frosts of autumn, yellow fever generally disappears from districts where it has been epidemic. We can philosophically reason to this conclusion by comparison of the conditions with those of other more familiar phenomena of heat and cold.

The window pane of a heated room on a cold day, supplies more nearly than any other familiar example, the peculiar conditions under which the refrigeration of ships has been, and save exceptional cases, must be attempted, and a lesson or two from the pane cannot fail to be of service. The temperature of the window pane, when the frost upon it melts, must be the temperature of melting ice, and an exact compromise between the external and the internal temperature -the one much below the freezing point, the other much above. Similar conditions apply to the hull of the ship, aggravated greatly by its irregular inner surface.

In the case of a ship, floating in a medium, the temperature of which is far above freezing, or as may be the case in the Gulf of Mexico, at from 60° to 75° Fah. (U. S. Coast Survey, 1857, 102), although the general temperature of the air in the interior of the ship may be considerably below freezing, even enough so for the deposition of frost upon ob jects contained therein, it is no evidence that the cracks and crannies which are nearest or next the skin of the ship will be thoroughly refrigerated, but on the contrary, they will constantly have their temperature restored to them by convection of heat from the water lying against the wall of the ship, and were it possible for frost to collect upon the sides of the ship, it could completely overlap such crannies without reducing the inclosed air or substance to the freezing point.

It may, then, be asserted that it is practically impossible to so thoroughly absorb the heat from these interstices as to make the destruction of the spores a matter of certainty. The thermal condition of the hold of a ship under process of refrigeration, even supposing that a thorough circulation of cold currents could by any possibility be established, is no evidence that it is not possible for yellow fever germs still to exist there. It is reasonable, then, to suppose that the cause of the recent failure to disinfect by refrigeration a government ship, which was obliged to return to port on account of the fever again breaking out after the vessel had been thoroughly treated by the freezing process, may be referred to the circumstances above given.

Owing to essential differences in construction, iron ships are more especially subject to these conditions than wooden ones; but there exists, even in the case of wooden ships, but little encouragement for perseverance in this method.-Science Observer.

#### A Rapid Voyage.

The fastest long distance run on record is that of the English mail steamer Durban, Union Steam Company, Capt. A. S. Warleigh, with telegrams from the seat of war at the Cape. The Durban left Table Bay a little before 8 P.M., April 1, and averaged 298 miles a day to Madeira, where a stop of 4½ hours was made on the 14th day. Plymouth, England, was reached at 6 P.M., April 20. The entire distance, about 6,000 miles, was made in 18 days 16 hours, actual steaming, or an average of 13.1 knots the whole voyage. Much better time has been made across the Atlantic, but this is the best on record for so long a distance.

Dr. Landerer, a Hungarian naturalist, writes from Athens that a dead African eagle, Gypactes barbatus, was lately found at Maina, on the southern Greek coast. On examining the bird an iron headed arrow over a foot long was found transfixed under one of the wings. Evidently the eagle had been fired at and struck in Africa by some native, an until it fell dead from exhaustion on touching at Maina.

It is estimated that there are in the United States over 400,000 railway cars of all kinds, also 16,000 engines. These engines and cars in traveling over the roads lose annually between four and five million of nuts. These will weigh over 1,500,000 lb., and their cost is between \$30,000 and \$40,000, and this loss is continued from year to year, saying nothing of the nuts thrown into the scrap heap, with their bolts worthless from the use of the jam nut, also the liability to accident from loose nuts.

A LARGE shoe manufacturer of New York State recently advertised in Boston and New York for 25 shoe fitters to work in his factory. He was ready to pay full current rates and furnish steady work, but had only one application. Apparently there are no large body of shoemakers out of em-

#### NEW PROPELLER SCREW.

The accompanying engraving represents Mr. H. G. Deane's improved propeller screw, Fig. 1 being a side elevation and Fig. 2 an enlarged longitudinal section of one of the blades.

The improvement consists in perforating the propeller with holes, the diameters of which increase as they approach the center of the wheel. These holes are countersunk on the driving face of the blade. It is stated that this wheel has a number of advantages, among which are great facility in backing; decreased liability to breakage and corrosion; increased buoyancy at the stern of the boat; entire absence of vibrations and trembling; and last and most important, an increase of speed is secured. The explanation of all this is that the vacuum behind the blade being destroyed, the full effect of the power applied to the wheel is realized.

The number of blades which has been found to give the tube may have moved. most satisfaction is four, but the inventor claims that perforations improve any and every kind.

TO PRESERVE AUTUMN LEAVES.-Spread the fresh leaves and press them in a suitable dish, with alternate layers of fine sand, which is thoroughly dry and as hot as the hand can bear. When the sand has cooled they may be removed, smoothed under a hot iron, dipped for a moment in clear French spirit varnish, and allowed to dry in the

#### A Big Jam of Logs Broken.

The big jam of 10,000,000 logs, on Carratunk Falls, was broken last week, 6,000,000 logs going out at once, which was said to have been a grand sight. It took 65 men 13 days to break the jam and get the rear over Carratunk Falls. A portion of the ledge was removed by blasting. Omar Clark, Esq., has had a crew of 50 men in charge from the time the first log started on Moose river, then on the main river un-


til this time, and not an accident of any kind has happened | This being a very possible contingency, the three points gelatine, previously tinted with fuchsine. By regarding to a man, not even the jamming of a toe. Tuesday the rear | urged by the committee are: (1) That portions of the steel | objects through such a medium, all the difficulties of color of the drive was at Patterson's Bridge, and by this time it is tube showed that they had been scored by a shell after they probably at Norridgewock. This will make 85,000,000 logs had been dislodged from their proper position. (2) That a that have passed down river this season.—Augusta (Me.) stud had been picked up which had been evidently torn out Journal.

#### THE THUNDERER'S GUN.

It may probably be difficult for most of us to believe that with the long column of projectiles and charges, shown in the ditions. foreground, in its bore. This, says the Engineer, was the unanimous opinion of the committee—an opinion, however, which has been much questioned by many, and flatly contradicted by Sir W. Palliser. The gun is in the Arsenal, open to investigation, lying in the condition exhibited by the engraving. The gun has been built up and held together by hoops as depicted. The fragments of the steel tube, and the stud and débris that are considered significant in their con dition, have been collected for careful inspection and kept in a glass case, and the figures of the projectiles and charges like the committee, that some demands are being made on our the exterior, while actual specimens of such stores have been from a single shot jamming against a hard papier maché disk, \$2 to \$4 gold per ton.

placed in their proper order on the ground, as shown by ABCDEF.

We will endeavor to put the leading points of the question briefly before our readers. That a gun may be fired with double ammunition in it is, we think, apparent from the fact that guns have been so loaded, and the mistake only discovered just in time to prevent the gun being fired. However monstrous such a state of things may appear, it may be easily seen that with a telescopic mechanical rammer it is possible to make a mistake when the tell-tale is not working. Indeed, it will be seen that if the thicker tube of the telescope is the one farthest from the rammer head, and of such a length as to enter the bore of the gun, the inside tube next the rammer head being in fact shorter than the bore, there is no means of knowing how short a way or how far the inside



DEANE'S PROPELLER.

of a Palliser shell, which showed that a Palliser shell was in the bore, that is, the projectile of the round previous to that last entered. (3) That the gun has yielded in the place where it could be most likely to do so, if a charge were fired in the 38-ton gun illustrated by the engraving was actually fired about the position indicated under these extraordinary con-

> Sir W. Palliser considers that the shell was wedged, and tripped up, as it were, by a portion of the wad lying some distance in front of the projectile, and that its base would, under such conditions, rise, and it should strike the bottom of the bore, scoring the steel tube, he thinks, in much the same way in which it is now seen to be scored. In fact Sir W Palliser considers, from experiments which he has made on a small scale, that the scoring of the pieces of steel tube is exactly what he would have expected. He feels, apparently,

but he assumes he has obtained very similar results in this way on a small scale, and that the great resistance of the millboard is due to the very great rapidity with which it must be crushed to let the shot pass. Sir W. Palliser, however, says with regard to the stud found by the committee in the turret, that if absolutely proved to be a Palliser stud it would be "conclusive" evidence in "favor of the committee's report." He thinks, however, that no certainty can be obtained in this matter; nevertheless the Royal Laboratory, who manufactured the studs and to whom this one has been submitted for opinion, pronounce unhesitatingly that it is actually a Palliser stud. This, it appears to us, ought to settle the matter.

The fact is that the accident was an extraordinary one, and we must not therefore be surprised to find that there was something extraordinary in the condition of matters to ac-


Fig. 2.

count for it, and we should accept the explanation that seems irresistibly supported by the evidence of the Palliser stud, to say nothing of the scored steel fragments and position of fracture. We are informed that definite instructions have been given to the War Office Committee, ordered shortly to assemble to investigate the whole question of heavy guns, to test the twin 38-ton gun of the Thunderer to destruction. General S. Enderby Gordon, C.B., has been appointed president of this committee. Admiral Boys, C.B., late Director of Naval Ordnance, and Major Ellis, R.A., are among the members, who are exclusively naval and military officers.



M. Delbouf has found that if a person afflicted with Daltonism looks through a layer of fuchsine in solution his infirmity disappears. A practical application of this discovery has been made by M. Javal, by interposing between two glasses a thin layer of


blindness are said to be corrected. Experiments in Philadelphia, says the Medical and Surgical Reporter, by Dr. P. D. Keyser, affirm the success of this method.



Our manufacturers are now fully awake in the matter of exhibitions, and, so far as their limited space is concerned, we are assured the coming Exhibition of the American Institute, of this city, will be of more than usual value and novelty. For information address the General Superintendent, New York city.

#### The Old Telegraph Mine.

In our issue of July 26, a correspondent, in describing the Old Telegraph Mine in Utah, gave a report of analyses of 1,000 tons of ore by Othon Wuth, of Pittsburg, in which a most important item was omitted. The report should have stated that the ore, in addition to the other matters supposed to have been inside the gun have been chalked on credulity in asking us to believe that this great result arose enumerated, yielded from 15 to over 100 oz. of silver, and

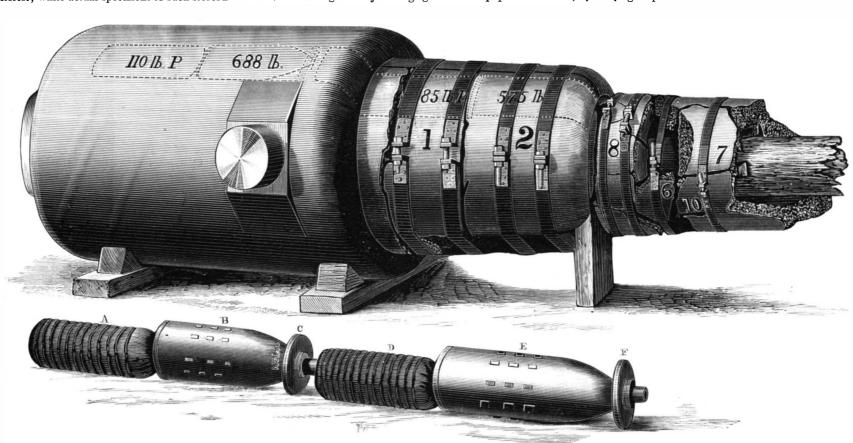

THE THUNDERER'S GUN AT WOOLWICH.

#### THE CYCLOSCOPE.


The very remarkable apparatus which we are about to describe was invented by Professors McLeod and Clarke, of the Royal Indian Engineering College. It is designed for measuring the velocity of revolution of any kind of machine whatever, and allows the absolute speed of the mechanism in motion to be determined at the very moment of observation, and that too with an accuracy that has been hitherto unknown. In order to make the description of the apparatus easier understood, we will state, in a few words, some of the phenomena upon which it is based. Every one knows, or has observed, that if any series of objects whatever are revolving or moving with a certain velocity the eye loses the faculty of distinguishing their outlines; and this is owing to the persistence of impressions upon the retina. Upon this physiological phenomenon are based the "phenakisticope" and other similar toys. Now, then, let us suppose that a certain number of points (Fig. 1, a) are examined in a mirror fastened to one of the prongs of a tuning fork. When the latter is set in vibration, these points, by reason of the phenomenon above mentioned, will appear to us like so many lines (Fig. 1, b). Now let us place these points (which we will suppose to be equidistant) on the diameter of a cylinder, and let us cause the latter to revolve with a uniform motion. If we arrange our tuning fork so that the vibrations will occur in a direction parallel to the cylinder's axis of revolution, the points will then appear to us in the form of a sinuous line (Fig. 2, a) or wave, and the height of this wave will naturally depend upon the amplitude of the vibrations, while its length will vary with the velocity with which the cylinder revolves. It will be readily understood that if a certain relation exists between the period of the tuning fork and the speed of the cylinder, the wave will appear stationary. Nothing is easier than to determine the conditions which are necessary for the formation of a stationary wave. In fact, if, for example, the velocity of the points is such that the time taken by each of them in traversing a space equal to the distance which separates them, is equivalent to the duration of one complete vibration of the tuning fork, a stationary line will appear (Fig. 2, a). If, on the other hand, the time employed by each point to pass over a space equal to two intervals is again equivalent to the duration of one complete vibration, the wave traced by the image of each point will meet the adjacent point; and, as each point will trace a wave of its own in space, these waves will be superposed and form a double one (Fig. 3, a). Each of these waves may, through a change of length, vary as to its form In fact, if we apply to the tuning fork the same reasoning that we have applied to the points, that is to say, if we suppose the duration of the vibrations is changed in some manner, waves like those represented in Fig. 2, b, and cylinder is revolving at a velocity of 40 revolutions per se-Fig. 3, b, might appear. Theoretically we might obtain for each wave an infinite number of waves of like order.

Now let us see how this phenomenon can benefit us in es timating, for example, the speed of a revolving cylinder. For this, let us suppose that our points are 100 in number, and that they are placed at equal intervals. Let us take a tuning fork making 60 complete vibrations per second; then let us examine our points, and let us, moreover, suppose that a stationary wave (similar to that represented at Fig. 2) appears to us; then it is very evident that 60 points per second (or 3,600 per minute) will pass before the mirror. But for one turn of the cylinder 100 points will have to pass before the mirror, so the velocity of the cylinder is then equal to  $\frac{3600}{100}$ =36 revolutions per minute. The least change in the speed of the cylinder will give an apparent translatory motion to the wave; and, if the velocity is too great, the wave will move in the same direction as the points, but if too little it will move in the opposite direction. This very simple experiment is the fundamental base of the "Cycloscope, "which it now remains for us to describe.

If upon the cylinder we had but one series of points, a single rate of speed might produce the wave that we should have chosen to determine its velocity; but if we place a series of dotted rings side by side, the number of points

same wave on examining the points of one of these rings, it would be necessary to give the cylinder different rates of speed. Nevertheless, it would be practically next to impossible to place such a series of dotted rings upon a cylinder. Fig. 4 shows the ingenious means employed by the inventors to overcome this difficulty. Upon a sheet of paper are traced a series of lines all converging to a point, o, and passing through equidistant points marked off on the line, a b (these lines are usually white on a blue ground); this done, a parallelogram, cd ef, is cut out equal to the superficial area of the cylinder and glued upon the latter. The distance from the point, o, to the line, ab, as well as the number of points between c and e, are determined by a very simple calculation. If we now examine these lines, not as before in a

cardboard, all the abovementioned phenomena will exhibit themselves exactly in the same manner; and, moreover, from a single inspection of Fig. 4 it will be readily seen that these lines act the part of an infinite series of equidistant points, and that consequently we shall be able to determine all the velocities that are possible between the extreme ones determined by ec and df. These lines possess another important an apparatus may render are numberless, and, as Sir Wilproperty: if we trace lines parallel to ec they will cut the oblique ones at a great number of points proportional to their distance from the line, ec. If, for example, the side, e c, is equivalent to 60 revolutions of the cylinder, and the

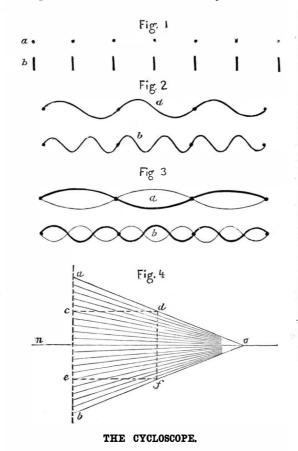

side, df, to 20, the line which divides ef and cd into two

equal parts will mark the position that must be occupied by the slit through which it will be necessary to examine the lines in order to obtain the stationary wave when the cond. The wave generally adopted is the one of the second order (Fig. 3, a), as being the easiest to recognize.

Fig. 5 represents the cycloscope as it is now constructed. At B we see the cylinder with its paper covering. The wheel, R, serves to put it in communication with the machine whose rotary speed is to be measured. The movable box contains a reed or vibrating lance, which performs the functions of a tuning fork, and to which is fastened a small plate of zinc, in which there is a slit about equal in width to the breadth of the lines traced upon the cylinder. The lance vibrates 60 times per second. The small toothed wheel, E, and the wheel, D, being situated upon the same axis with the box, A, the latter can, by simply turning the wheel, D, to the right or left, be moved to any position in front of the cylinder. At S is an opening through which the lines are examined; it contains a lens for the purpose of magnifying the images. When the apparatus is to be operated the plate is caused to vibrate by means of a small bellows, the tube of which is seen at C C'. The box, A, carries an index by means of which the speed is read upon a graduated scale. Supposing that the cylinder is revolving slightly damped, is laid on a perfectly level board a little and that we wish to learn its speed, we place the eye at S, and with the right hand turn the wheel, D, until we meet with the stationary wave which has served to determine the spread with a glass rod in the ordinary manner. When dry varying in each, it is very evident that in order to obtain the divisions; the index, O, will then point to the figure that it is cut into suitable sizes and exposed between plates of

mirror, but through a slit cut in a thin sheet of metal or indicates the speed. The graduated scale has also been arranged by Professor McLeod so that the speed can be read off without removing the eye from S.

> By means of the cycloscope we can ascertain the minutest variations in velocity, and learn thereby that the most perfect machines, no matter how well regulated they may be, are constantly subject to variations. The services that such liam Thomson has well said, Professor McLeod has here given us a more sensitive and more perfect measurer of time than that which we possess in the best made chronometer.—La Nature.

#### ARSENIC IN WATER COLORS.

According to the Chemiker-Zeitung, M. Fleck, in searching into the causes of the death of a young engineer, found in the corpse remarkable quantities of arsenic, the origin of which he attributed to the water colors which the deceased had been in the habit of using; for, on an analysis, he found that a specimen of sepia contained 2.08 per cent of arsenious acid; one of terra di Sienna, 3:14 per cent, and one of red brown, 3:15 per cent. The deceased engineer having been in the habit of drawing his brush, charged with the color, through his lips, it is not impossible that the arsenical colors were absorbed by degrees in the saliva. M. Fleck was then led to make a profounder study of the subject, and with the following result:

The dark colors of French make usually have an iron base; when they are dissolved in water they give a colorless liquid most generally containing no arsenic, while the residue left on the filter contains the organic matter combined with iron and mixed with arsenious acid. Some of the darker colors, marked "chenal," and "Paris et Richard." gave the following quantities of arsenic: Colored sepia, 1.10 per cent; natural sepia, 0.98 per cent; burnt sienna, 1.76 and 2.23 per cent: Van Dyke brown, 0.81 per cent; brown ocher, 0.52 per cent; sap green, 0.82 per cent; bister, 0.67 per cent; Indian red, terre de Cassel, burnt umber, raw umber, each 0.5 per cent.

Among the water colors known under the name of "Hornemann's technical colors," which were submitted to analysis, brown ocher and sepia contained only traces of arsenic, while terra di Sienna showed 1 19 per cent. It might be perhaps inferred that because oxide of iron has been successfully employed as an antidote to arsenic, and because arsenite of iron is not poisonous of itself, the arsenic contained in water colors in the form of arsenite of iron could exert no injurious influence on the health. But this would not be so unless the arsenite of iron were accompanied by ferric hydrate and magnesia in a free state (as happens when iron is exhibited as an antidote), since these substances neutralize the acid juice of the substance and thus prevent the decomposition of the arsenite of iron formed. When the latter comes in contact with the gastric juice without being protected by a base, the hydrochloric acid of the juice destroys the arsenite of iron introduced with the color and sets the arsenious acid free.

#### Negatives on Paper.

The success which has followed the practice of the gelatino-bromide process and the easy character of its manipulation have revived the desire for a substitute for glass as a support for the sensitive film. The Rev. H. J. Palmer has already shown good work on a gelatine film, and several operators have been more or less successful with various substances; but we want something simpler and less troublesome before glass can be dispensed with. One of our successful northern amateurs is at present getting pretty good results on simple paper. The kind he at present prefers is known as letter-book paper—a variety extremely thin but tough, and with a perfectly smooth surface. A roll of this, narrower than itself, and the edges folded over and fastened with gum to keep it flat. The emulsion is poured on and

> glass, as was the case with waxed paper. So far the results are promising, and I have little doubt that some such arrangement will ultimately be found in every way satisfactory for all outdoor work. It is probable that a previous coating of rubber in benzole, as suggested by me a number of years ago, might be an advantage by keeping the emulsion on the surface. Should simple paper be found to answer, as I have little doubt it will, some of our enterprising manufacturers will soon be sending it into the market in rolls similar to carbon tissue, as it may be made by the same apparatus and in exactly the same way by simply substituting the sensitive emulsion for the pigmented gelatine. In addition to the advantages of lightness and non-liability to break, there will be the further and, to many, greater advantage of reduction

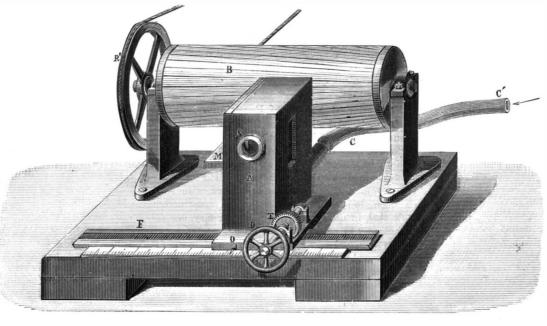


Fig. 5.-THE CYCLOSCOPE.

in cost. The price of glass is altogether saved and the labor reduced to a minimum, a band of several yards being coated turn to the subject again as the experiments of my friend their attention in this direction, as the greater the number the British Journal of Photography.

#### MECHANICAL INVENTIONS.

An improvement in the class of cotton presses whose foland thus arresting the follower either in its ascent or descent, graving.

An improved form of axle box and journal for vehicles has and night, longitude, and so on. been patented by Mr. James A. Manning, of Danville, Ind. It prevents rattling, and it may be adjusted to compensate box is prevented from wedging upon the journal.

An improvement in side-bar wagons has been patented by Messrs. William and Cyrus R. Fenstermacher, of Ship-feet in circumference, with a period of 76 years. pensburg, Pa. The invention consists in combining with

sheet metal having inclined slits formed in its edge or edges around a wire spirally, has been patented by Alanson Cary, jack-knife in the space of one year. of New York city.

An improvement in the class of sash locks, in which an eccentric and sliding bolt are so connected that the action of Mich. The latter is the work of Mr. Felix Meier, a mechanic, the eccentric operates the bolt, has been patented by Mr. Hermann T. Raeke, of Baltimore, Md.

Baziel W. Lloyd, of Jackson, La. It consists in the combination of a box having arm and screw cutter sections held in the box, and a wrench having parallel jaws, the movable one being provided with a socket for holding the dies.

Mr. Moses R. McGregor, of Pine Bluff, Ark., has invented with plows and chains, and wherever available. It consists of the two flat links of similar size and shape, each having angels with flaring torches, and over the center is the figure an opening at one side, and connected together. Upon one of Father Time. At the quarter hour the figure of the infant link is fixed a flat-sided pin or lug, which passes through a strikes its tiny bell; at the half hour the figure of the youth slot that is formed in the other link. This pin is headed or strikes his bell of louder tone; at the third quarter the man upset upon the link so as to retain the links together.

improved washing machine, which may be applied to an ordinary wash tub. It is simple, convenient, and effective. It is an improvement upon the washing machine for which let-States follows. As the procession moves, Washington rises ters patent No. 155,873 were granted to the same inventor, October 13, 1874.

An improved clay press has been patented by Mr. Simeon G. Phillips, of Perth Amboy, N. J. The object of this in-paniment of music played by the clock itself. The music vention is to construct a press or adapt the ordinary presses for pressing clay in thin sheets one half the usual thickness, more or less, and sufficiently dry for the potter's use, without planets around the sun, comprising Mercury, which makes increasing the bulk of the press or using more cocks to produce the usual amount obtained at one pressing.

An improved attachment for clocks, to be connected with as the clock continues to run, so that the only attention required will be to wind up the clock at the proper time, has public. been patented by Mr. Simon Goldsmith, of Boston, Mass.

an improvement upon the car brake shoe, patented March 21, Paris, Berlin, Vienna, St. Petersburg, Constantinople, Cairo, 1876, by I. H. Congdon, in which detached pieces of wrought Pekin, and Melbourne. The clock also shows the day of the shores were thousands of people viewing the pleasing object. iron are embedded in a body portion of cast iron, by casting week and month in Detroit, the month and season of the the said body portion around the wrought pieces, whereby year, the changes of the moon, etc. It is said that Mr. the wearing face of the shoe is composed in part of wrought | Meier has worked upon this clock nearly 10 years, and for | going so well." iron, and is enabled to better resist wear, and gives an in-the last four years has devoted his whole time to it. creased friction for stopping the motion of the car. The increasing the wearing qualities, also secure the requisite been put to better use. strength to resist the breakage to which its use renders it liable, and at the same time allow the use of a much lighter and less expensive shoe.

Mr. James Tripp, of Coldwater, Mich., has patented improvements in that class of sewing machines in which a revolving shuttle takes the upper thread from the needle and loops it around the lower thread, which is carried by a bobbin contained within said revolving shuttle. The invention consists in the peculiar arrangement of the revolving shuttle with respect to its driving mechanism, its holding plates, and other co-operating parts, and in the means for facilitating the removal of the shuttle and its bobbin.

#### Relative Economy in Steam and Gas Engines.

gas engines now in use, of small capacity, realize 1 horse power on the gas derived from 13-5 lb. coal; and the best economical as motors than steam engines.

#### A Couple of Clocks.

Dr. J. L. Blair, of Abingdon, Illinois, has recently comin the most perfect manner in a few minutes. I hope to re- pleted a clock which is locally regarded as one of the most wonderful pieces of mechanism ever made. This clock is 8 proceed, and trust that, meanwhile, other workers will turn feet 2 inches high, 3 feet 4 inches wide, and 10 inches deep -lower half. The upper half is 6 inches deep and has a cirwho put their hands and heads to the work the sooner will cle top. The largest wheel is 13 inches in diameter. The the desirable end be accomplished.—John Nicol, Ph. D., in longest shafting is 3 feet. Weight of clock, 118 pounds; of weights-two in number-8 and 22 pounds. The case and works are made mostly of walnut wood. In addition to its time-keeping capacity, this clock minutely illustrates (it is claimed) the composition and movements of the solar system. lowers are operated by a screw or screws, and are provided. Time is indicated at the center of the sun, a ball 15 inches with an automatic mechanism for shifting the driving belt, in diameter. Around the sun the planets circle in their respective orbits. The earth is 3 inches in diameter, turns on has been patented by Mr. George Cooper, of Augusta, Ga. its axis once a day, and goes round the sun in an orbit 9 Its construction cannot be readily described without an en- feet in circumference once a year. In its daily revolution the earth indicates the time of day everywhere, shows day

The moon, 11/4 inch in diameter, accompanies the earth with its proper motion, illustrating its phases, eclipses, and for wear; the journal will retain the oil or grease, and the the rest. The motion and phases of Venus are illustrated in like manner, and similarly the orbits and motions of other means of communication, between the floors, and affords a planets. Halley's comet, 7 inches long, traverses an orbit 14

At the right of the clock a skeleton, 10 inches high, strikes the king bolt and fifth wheel a stay or brace having rear the hours. At the left another skeleton plays a tune as often branches secured to side bars passing up on the inside of as required. A skeleton "Father Time" swings his scythe fifth wheel, and having the front branches fastened to the at the center of the lower half of the clock. Above are places for showing pictures of historical events. Other details are A machine for manufacturing barbed fence wire of that described, at great length and with much enthusiasm, in the kind in which the barbs are formed by wrapping a strip of local newspaper, the most remarkable feature being the circumstance that the entire contrivance was whittled out with a

This Abingdon clock, however, appears to be a very rude affair in comparison with one now on exhibition in Detroit, and is said to eclipse the famous clock at Strasbourg in complexity and interest. It stands 18 feet in height, and is in-An improved monkey wrench has been patented by Mr. closed in a black walnut frame elaborately carved and ornamented. The crowning figure is that of Liberty, upon a canopy over the head of Washington, who is seated upon a marble dome. The canopy is supported by columns on either side. On niches below, at the four corners of the clock. are four human figures representing infancy, youth, manand a hammer in the other. The niches are supported by strikes his bell, and at the full hour the graybeard. Then Mr. Daniel Kunkel, Sr., of Oregon, Mo., has patented an the figure of Time steps out and tolls the hour, as two small figures throw open doors in the columns on either side of Washington, and a procession of the Presidents of the United and salutes each figure as it passes, and it in turn salutes him. They move through the door on the other side, and it is then closed behind them. This procession moves to the accommachinery is capable of playing several airs.

The mechanism also gives the correct movement of the the revolution once in 88 days; Venus, once in 224 days; Mars, once in 686 days; Vesta, once in 1,327 days; Juno, once in 1,593 days; Ceres, once in 1,681 days; Jupiter, once a self-lighting and self-extinguishing attachment for gas in 4,332 days; Saturn, once in 29 years; Uranus, once in 84 burners, which shall be so constructed that the gas will be years. As these movements are altogether too slow to be poplighted and extinguished automatically at fixed times, so long 'ularly enjoyed, the inventor has added a device by which he can hasten the machinery to show its workings to the

There are dials which show the hour, minute, and second Mr. John F. Curtice, of Fort Wayne, Ind., has invented in Detroit, Washington, New York, San Francisco, London,

No doubt this ingenious contrivance may make a curious object of this invention is to provide such a construction of and possibly a remunerative show; still it would seem that this composite brake shoe as will, while retaining and even the maker's time, skill, patience, and ingenuity might have

#### Fireproof Partitions.

A provincial builder, who is not acquainted with London practice, would be surprised to find that the inside partitions of most of the houses in the suburbs are constructed wholly of timber framing, and that the rooms of several stories are divided in this manner. The house, in fact, is not complain if they were filled in with brick-work, or if According to Mr. J. T. Sprague some of the improved the joists over the heads of one partition and its lower porrights or quarters are built up with rubble laid loosely, and about."

then plastered on both sides to fill up all interstices, so that, practically, a fire-resisting partition is the result. Our system of brick-nogging is a somewhat analogous operation, and answers tolerably well if properly done. In France the usual operation is as follows: The framed partition is inclosed on both sides by strong oak batten laths about three inches wide, nailed horizontally about six inches apart; within this the spaces are loosely packed with rough stone, and a strong mortar or plaster of Paris is laid on from both sides at the same time, and pressed through the interstices, so that the rubble becomes embedded in the mortar, consolidating both it and the timber. The surfaces are also covered so that the laths are hidden entirely. In this way a thoroughly concrete partition is formed, more effective and self-supporting than the brick wall; certainly superior and more durable than the English brick-nog partition, and throwing all ordinary plastered partitions into the shade. The brick-nog partition often fails; when the timber decays the bricks are not held together by a strong and independent thickness of plaster. The common hollow plastered partition becomes a nest for mice and a receptacle for vermin and dirt, and when a fire occurs it forms the channel for the supply of air. It is strange that although these facts are patent to every practical builder, architects and builders still adhere in an obstinate fashion to the plastered partition and the hollow wooden floor. have constantly advocated floors, staircases, and landings, particularly, of concreted and incombustible materials, and though the idea is recognized and carried out in all large and important buildings, the ordinary dwelling-houses are allowed to be exempt from such salutary provisions. We called attention some time ago to the value of concrete in wall-building, and suggested the use of light timber lattice framing filled in or compacted with concrete. In a recent number of an American journal we find the same idea has been thrown out, and the writer gives a diagram of the system. The plan we suggest is to form a rough lattice of battens or strips  $2\frac{1}{6} \times 3$  in. or  $3 \times 2$  in., with spaces of 4 inches or so apart, to fill up both sides with lime concrete, and to finish the two sides by a coat of plaster of the usual thickness. This construction would be cheaper than framing, and be admirably adapted for internal partitions, and for all temporary buildings.

It is occasionally necessary to divide an upper room into two by a partition, and to relieve the floor of unnecessary weight it becomes necessary to truss the former. Now the lattice partition or wall we have referred to becomes a selfsustaining structure, and may be supported easily by corbels at the ends. We are led, in speaking of weight, to say a word in favor of earthenware pottery as an excellent substitute for rubble or stone concrete. Common agricultural drain pipes of small diameter have been introduced by Mr. Pritchett for this purpose, but any kind of cellular construction may be adopted. It is to be regretted that architects do not adopt more largely the indestructible forms of partitions we have mentioned, and thus render a service to both sanitary construction and sound building. It is not less surprising that such ordinary precautions to insure buildings against fire, such as incasing and rendering solid the floors and partitions, should have escaped the vigilance of those who frame our building enactments.—London Builder.

#### The First Steam Ferry Boat Between New York and Jersey City.

In 1810 arrangements were made with Robert Fulton to construct steam ferry boats, and on the 2d of July, 1812, one named the Jersey was put in operation. The event was celebrated with a grand banquet given by the Jerseymen to the New York Common Council. A correspondent, writing to a newspaper of the time, savs:

"I crossed the North River yesterday in the steamboat with my family in my carriage without alighting therefrom, in 14 minutes, with an immense crowd of passengers. On both I cannot express to you how much the public mind appeared to be gratified at finding so large and so safe a machine

This "large machine" was 80 feet long and 30 feet

A year later the York was put on with the Jersey. They were supposed to run every half hour from sunrise to sunset, but frequently an hour was consumed in making a trip. The following is Fulton's description of the boat:

"She is built of two boats, each 10 feet beam, 80 feet long, and 5 feet deep in the hold, which boats are distant from each other 10 feet, confined by strong transverse beam knees and diagonal traces, forming a deck 30 feet wide and 80 feet long. The propelling water wheel is placed between the boats to prevent it from injury from ice and shocks on ennothing more than a shell of brickwork with partitions of tering or approaching the dock. The whole of the mawooden studs. How such a mode of construction can be chinery being placed between the two boats, leaves 10 feet tolerated, in utter contempt of all sanitary precautions, it on the deck of each boat for carriages, horses, cattle, is not easy to conjecture, but leasehold tenure encourages etc.; the other having neat benches and covered with an the system, and surveyors themselves wink at it. Of course awning, is for passengers, and there is also a passage and this method expedites the erection of houses, and we would stairway to a neat cabin, which is 50 feet long and 5 feet clear from the floor to the beams, furnished with benches and provided with a stove in winter. Although the two tion were filled up with incombustible material, so that a boats and space between them gave 30 feet beam, yet they fire may have less chance of destroying the partitions above present sharp bows to the water, and have only the resiststeam engines, of large capacity realize 1 horse power on it. In Paris, as every one is probably aware, timber fram- ance in the water of one boat of 20 feet beam. Both ends 2½ lb. coal. Gas engines are thus shown to be much more ing is largely resorted to, but the spaces between the up- being alike, and each having a rudder, she never puts

#### Is it Paying?

places of most of the strikers without much delay, leaving the strikers permanently out in the cold, strongly indicated that the answer to our question would have to be in the negative. Its probability is heightened by press reports to the effect that at a meeting of the directors of one of the mills, August 5, it was voted to discontinue the use of about ten thousand mule spindles-about one-fourth of the whole number used in the mill-and to substitute ring frame spindles therefor.

#### Correspondence.

#### The New Optical Delusion.


To the Editor of the Scientific American:

In your last issue you illustrate two optical puzzles. The explanation given below shows clearly, I think, that the phenomena depend on the property of the retina to retain images of objects for a certain interval after the latter are removed. Fig. 1, whilst being steadily gazed at, is to be moved in a small circle without being rotated; in other words, the



figure is to be moved in the same way that one moves a pail in rinsing it out. The rings will then appear to be rotating about their center in the same direction that one is moving the figure. The center of the circle in Fig. 1 is moved on the line of the dotted circle in the direction shown by the arrow. Suppose, for the sake of explanation, that impressions made on the retina are erased every 1/6 of a second, and first impression. These cogs, therefore, although on the that you move the figure so that its center, x, completes the dotted circle once per second.


An impression of the rings is made on the eye; the rings are then moved so that their center completes an arc of, say, 16 of the dotted circle; a second impression is made on the direction of arrow. eye; the first impression is not yet erased, as only  $\frac{1}{16}$  of a second of time has passed since it was formed, so that the retina has the two images superimposed, as shown in Fig. 2. In this figure the most white space is shown on the line, ab, and most black space along  $c\ d$ ; the rings are moved another arc of  $\frac{1}{16}$  of the dotted circle, and a third impression is made on the retina; 1/8 of a second has now elapsed since the first impression was made, and, agreeably to our supposition, it is now obliterated; the figure on the retina is now as in Fig. 3.




The line of white parts, let it be observed, has moved from its horizontal position, a b, Fig. 2, to the inclined position, v'b', Fig. 3; similarly the line of dark parts has moved from the vertical to the inclining position. The figure is moved another arc of 1/16; now 1/8 of a second has elapsed since the second impression was taken, so that it in turn disappears. leaving on the retina the impression like Fig. 4; here the white parts have moved still further from the horizontal, and the dark parts from the vertical position; the two, in fact, are traveling in a circle, and, as will be seen by imagining this series of figures completed to the number of sixteen, the light and shade will complete a circle every time the center of the rings completes one. It is the light and shade moving in a circle that gives the rings the appearance of revolving. Of course if the rings in the figures overlap each other more or less, or, in other words, if the rings are moved in a larger or smaller circle, the configurations sent to the eye are quite different, but in all of them the lights and shadows ing in that direction. are following each other around the circle, and always giving the rings the appearance of revolving.

For the cogwheel puzzle, make the same suppositions as for the ring puzzle. An impression of the wheel, Fig. 5, is Cincinnati, O., August 3, 1879.

made on the retina; the wheel is moved an arc of  $\frac{1}{16}$  of the When the Fall River mule spinners struck work in the dotted circle, when a second impression is made; the first face of conditions which made the failure of the strike highly impression still remains, and the eye sees an object like Fig. probable, to say the least, the question was raised, "Will it 6. The actual wheel is represented by the right hand one of the two superimposed figures, the left hand figure rep-The circumstance that the mill owners were able to fill the resenting the first impression. The first impression is, of




course, not so strong as the last, and therefore the cogs at b, part of the first impression, are not seen with anything like the distinctness of the cogs, a, parts of the actual wheel. The cogs at the right hand side of the right hand wheel (the actual wheel) are not seen as distinctly as those on the left hand side, because they project into a black space; that is, the rays of light coming from these cogs to the eye fall on




a part of the retina that is occupied by the, as yet unerased, actual wheel, are vaguely seen; the only cogs seen distinctly, therefore, are those at the left hand side of right hand wheel, at a. While the cogs, a, are clearly seen, the center of the wheel is moved  $\frac{1}{16}$  of the way round the dotted circle in the

The wheel is thus moved in a downward direction; the  $\cos a$ , the only parts distinctly seen, are moved downward.



This is remarked by the retina, and then the third impression is taken. The first impression of the wheel (that is, the left hand wheel of Fig. 6) now disappears, and the second impression (that is, the right hand wheel of Fig. 6) becomes pale. By the same reasoning employed with Fig. 6, we find that the only cogs seen distinctly in Fig. 7 are those at a', and that they move in the same direction that cogs, a, in Fig. 6, do. Fig. 8 shows a further stage in the reasoning process,



the prominent cogs being at a'', moving also in the same direction as those at a in Fig. 6. Now, all the cogs when distinctly seen are moving in a direction contrary to the hands of a watch, thus giving the wheel the appearance of revolv-


The drawings can be better understood by tracing Figs. 1 and 5 on tissue paper, and then moving the tissue paper over the prints in the prescribed way.

#### The Optical Delusion-An Explanation.

To the Editor of the Scientific American:

In the last Scientific American, for the week ending August 9, I saw an article respecting some remarkable optical delusions, and as no explanation has been offered, I should like to state a theory which seems very well to answer the conditions of the question involved.

In Fig. 1 we have two sets of parallel lines, one horizontal, the other perpendicular; if we move the paper backward and forward, along the line, A B, the horizontal lines will remain clear and distinct, while the others will be blurred and indistinct. This principle has been applied in the octagonal figure, in Fig. 2. If the paper is moved to the right and left, the sections, A and E, will be clear, while C and G are dim, because of the lines overlapping each other. If it were possible to move the paper first across G and C, then D and H, E and A, and so on around, A and E would shine out clearly, then B and F, while the sections at right angles to these would be dimmed. In this way two bright sections would be seen to advance from section to section, followed by two dim sections; and if it were not for the sharp angles, which arrest the attention, the whole polygon would seem to revolve. If we increase the number of the sides of the polygon, the angles will be less prominent; and if this process is continued, the polygon will become a circle. When we perform the experiment with the circle we are immediately struck by this shadow, which is seen to cross the circle in the direction of the motion, and when it is whirled around, according to the instructions



given, we can see it very distinctly moving around, and giving the impression that the circle itself is in motion. Another reason suggests the truth of this "shadow theory." If, while the circle is in full motion, the observer throws his eyes out of focus (some have that power), all the rings will become blurred, and the shadow will disappear, causing the circle to stand still. This delusion differs from the other in a very marked degree. In Fig. 6-[as H. W. F.'s Fig. 3 corresponds with A. O.'s Fig. 6, we refer to that figure]-suppose that the paper is moved in the direction of the arrow. As we move it in a curve toward the right, the tooth, a, comes into notice; but as the paper retires, in a curve to the left, the tooth is overlapped by the shadow of the ring, which the retina holds. This takes place at each tooth, and the interior of the ring seems to have a retrograde motion. This second delusion is not so easily seen as the first, and I have devised a surer way of seeing it, namely, by making the teeth longer and more numerous, and by filling in the center of the circle with black. In observing this class of phenomena I was much surprised by another curious fact. I was looking at a moving circle, while others on a separate piece of paper lay near me on the table, and, although my



attention was concentrated on the moving paper, I could see the other circles going at the same rate of speed. As soon as I looked at a stationary object, the other circles stopped.

I afterward tried the same thing in a different form: I placed the point of my pen near one of the circles, and noved it around, watching it closely all the time. then see all the circles spin around, as before.

Stamford, Conn., Aug. 4, 1879.

H. W. F.

#### The Aurora.

Professor Trouvelot states that a beautiful auroral display was observed at Cambridge, on the evening of June 17. It began at about 9:15 P. M., and lasted until 11:45 P. M. The illuminated portion of the sky was nearly 20° E. and 15° W. of the magnetic pole, it extended about 40° vertically to the horizon, being highest in the vicinity of the pole. Many whitish and cream colored streamers were seen, especially to the west of the magnetic meridian, the undulations being well marked and numerous, no rosy-hued streams being observed. Along the horizon and densely massed were dark cumuli clouds, through openings of which could be seen the auroral light, showing distinctly that the effect must have taken place in the atmosphere beyond the clouds in crues-

#### A NEW MITER CUTTER.

The accompanying engraving represents an improved miter cutter recently patented by Mr. W. R. Fox, of Rockfall, Conn. Its construction is so simple that it can be readily understood by a glance at the engraving. The cutters, which | ing from the scaffold begun. are made of the finest cast steel, are secured to a slide that moves in guides along one edge of the bed and the slide is moved by a pinion placed between the rack on its outer side and a rack on the bed, the pinion being provided with a long lever by which cutters may be moved in either direction with force sufficient for any work that the tool is capable of

the work is adjusted. At each end of the bed and near the and over-reaching. path of the knife there is a pivoted support for the end of the piece being squared.

This tool seems superior to the block plane, as it will do the work quicker and better. It is particularly useful in squaring across the end of the grain; when used for this purpose, the piece being cut may be backed up by another piece to prevent slivering.

This tool is strong and well designed, and well calculated to meet the wants of woodworkers

#### How to make a Bark Lodge.

The Earl of Dunraven gives the following directions for making a hunting lodge, Canadian style: Having selected a level spot, make four low walls of two or three small pine logs, laid one on the other, and on these raise the framework of the camp. This consists of light thin poles stuck into the upper surface of the logs, and the upper ends leaning against and supporting each other. The next operation is to strip large sheets of bark off the birch trees, and thatch these poles to within a foot or two of the top, leaving a sufficient aperture for the smoke to escape. Other poles are then laid upon the sheets of birch bark to keep them in their places. A small doorway is left in one side, and a door is constructed out of slabs of wood or out of the skin of

some animal. You next level off the ground inside, and strew it thickly with the small tops of Canada balsam fir for a breadth of about four feet; then take pliant ash saplings and peg them down along the edge of the pine tops to keep the carpet in its place, leaving a bare space in the center of the hut, where you make the fire.

#### SCREW SCAFFOLDING.


The following is a description of scaffolding recently given in the Building News by Mr. Joseph J. Lish. We have prepared an engraving representing a section through the center of tower, showing the screw scaffolding in position. There are four scaffold screws, which bear the whole scaffolding of tower, one being placed in each angle of wall. Each screw works through three nuts, and has a collar carrying a saddle for the support of the ledgers and framing, from which the workmen's platforms or scaffolds are suspend-of wall. It is not necessary to clear the platforms pre-tion is such that by the use of one battery the full power of the

ed by wroughtiron slings. The wheels of the  $be a {\it rers} \, to \, outside$ scaffold travel up the face of the wall as the scaffold rises. Guard rails are fixed where required. to insure the safety of the workmen employed.

In proceeding to fix the scaffolding, where the scaffold screws are to work in the wall, all that is necessary is to place the screws in their proper posi tion in the wall whilst the foundations are being put in, then plumb and build round them, clasping two of the nuts on each screw at the same level and at the required distances apart. If 2 ft. 6 in. of wall is to be built for each lift of scaffold.the nuts will require to be placed every 2 ft 6 in. in height.

The screws should next be turned until all the saddles are standing on the same level; the overhead framing, ledgers, and platforms should now be placed in position, the upper nut clasped on where shown, and the work of build-

If the platforms are placed about 12 inches below the top of the wall then built, sufficient space will be left between the top nut and the collar to allow of building up nearly to the collar, as required before raising the scaffold. The scaffold platforms will then be standing at about the best height for effective work, as the workman will, by such an arrangement, always be walling from just below his knee to Upon the bed there are gauges and guide marks to which about the level of his elbow, thus avoiding undue stooping

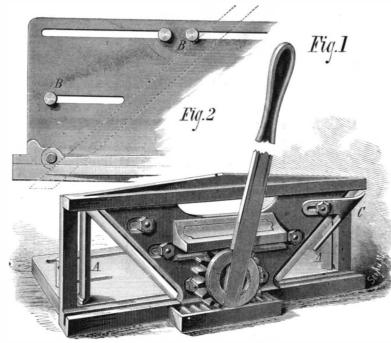

FOX'S MITER CUTTER.

workmen, whilst standing on their scaffolds, turn the screws (by a simple arrangement at the collar) and raise the scaffolding, walling materials, and themselves as well, a height of 2 feet 6 inches. The foot of the scaffold screw will then have passed the bottom nut, leaving it lying loose in the wall. This nut must then be drawn out of the wall (a hole opening to the inside being left for this purpose), and clasped on to the scaffold screw at the level of the upper collar, making it thus a top nut. When, after the next lift of scaffold, the foot of screw has passed up through the lower nut, this nut, in its turn, is lifted up and made a top nut; and so on successively until the full height of the wall has been built. It will thus be seen that a screw never rests in less than two nuts. As the screw by this system travels up with its scaffold, the same screws will do for any height | ranged in a circle around the armature wheel. The construc-

vious to raising. Before commencing to plaster, the nut holes in the body of the walls are filled up, and the holes left by the screws are well grouted.

For "cleaning down" the work the outside platforms can be lowered as required from the projecting ends of ledgers.

The scaffolding screws can be used in three separate ways: 1st. Working in the body of the wall.

2d. Against one of the faces of the wall.

3d. Independent of the wall.

The first method is shown in the engraving.

Where the screws are placed at long distances apart, it may be necessary to truss the ledgers or scaffold-bearers, and where the builder wishes to work with a minimum number of screws, trussed bearers will naturally suggest themselves.

> To prevent the possibility of brickbats and building débris flying out into the roadway, a screen may be placed along the front of the building suspended from the scaffolding. This screen, which may be a kind of rope netting, will uncoil as the scaffold rises. If the whole of the material for a work of this kind is raised in the interior of the building, and the outside scaffold platform used for the purposes of setters merely (and not for walling materials), there need be but slight inconvenience, and little or no danger, experienced by the street traffic whilst building operations are carried on. As to the covering in of these scaffolds, all that the builder requires to do for this purpose is to stretch tarpaulings or covers over such portions of the ledgers as will afford the necessary protection to the working platforms and walls. These coverings may be placed in position when the scaffolding is first fixed, as they add but little to the weight, interfere in no way with the raising operations, and go up with the scaffold without further attention or alteration.

> There is no valid reason why the whole operation of building should not be carried on under cover, and the "waller" be placed in as good a position for doing his work as the stone-dresser."

The arrangement here applied to scaffold-When the 2 ft. 6 in. of wall has been built all round, the ing could be made available for the extension of existing buildings by raising the roofs entire, and adding to the walls as the roof rose, in place of the tentative methods now resorted to when "roof-raising" is practiced.

#### MISCELLANEOUS INVENTIONS.


The combination, with wooden strips on bottom and sides of a basket, of metallic strips running under the bottom, up the sides of basket to rim, and overlaid upon the wooden strips, and a horizontal strip running around the body of the basket next to the bottom, has been patented by Mr. Elmer D. Ballou, of Becket, Mass.

Mr. James Hoover, of Gratis, Ohio, has invented an improved electric motor, in which a revolving armature wheel is made use of in connection with fixed electro-magnets ar-

> magnet is obtained every time the circuit is closed. One magnet only being in circuit at once there is only the resistance of that one magnet to the current, while the effect is the same as it would be were all the magnets energized at once with the stronger battery which would then be required.

A wood type having a face formed by a veneering of rubber or analogous material, and the body and sides of the letter composed mainly of wood, has been patented by Mr. Peter Gfroerer, of Terre Haute, Ind.

An oil press hoop with beveled shoulder and movable beveled perforated bottom, has been patented by Mr. William V. Mc-Kenzie, of Rahway, N. J.

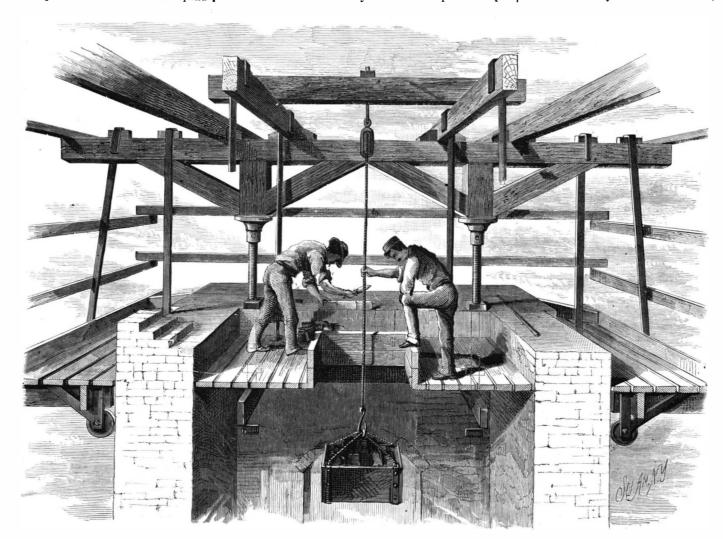

SCREW SCAFFOLDING.

#### THE JAPANESE GOAT ANTELOPE.

Some interesting additions have recently been made to the series of ruminants in the Zoological Gardens, London. There is a specimen of the Japanese antelope, of which we tion in a practical manner. The very general use of the mogive an illustration. This animal is new to the society's col- derngas engines is evident that coal gas is becoming recognizlection, nor has it previously been exhibited in any of the continental gardens, so far as we know.

name imports, a native of the Japanese empire, where it is said to be very rare, being only found in the higher mountains of the interior of the islands of Niphon and Sikok. It was first described by Siebold in his well known work "The Fauna Japonica," from two examples in the Leyden Museum. Siebold tells us that its Japanese native name is "nik," but he gives us scarcely any other details respecting this animal. The engraving represents a young male, with his horns growing.

#### A New Fish.

Professor Baird has forwarded, through Dr. Tarleton H. Bean, now at Gloucester, to Mr. E. G. Blackford, Commissioner of Fisheries, an entirely new fish, which, aside from representing a novel genus, may have a decided commercial value. The first one seen was caught by Capt. W. H. Kirby, of Gloucester. It represents the new genus Lopholatilus, one having the general appearance of Latilus, but with the addition of a nuchal crest and labial appendages. It has received the name of leopard fish, on account of its spots. The fish were caught 50 miles south by east of Noman's Land, in 75 fathoms of water, while trying for cod and with cod bait. The fish seemed very abundant. A few weeks ago the presence of these fish was totally unheard of. Dr. Bean writes: "The type is in the National Museum, but now we have eight to bear it company." Examining the

culiar traits. What was strange was to see an adipose fin of heat, will realize for himself an enormous pecuniary relike that on the salmon, only that this fin, instead of being compense, and will do a great service to mankind at large. near the tail, was on top of the head. The dorsal extended from about two thirds of the fish to the caudal. Below, uneaten the leopard fish declare it to be excellent. The fish was summer. Its depth will be 20 feet.

about 28 inches long, and would weigh, perhaps, about the same as a cod of the


#### GIANT TREE.

The colossal pao d'arco, or bow wood (Tecoma speciosa), and macaranduba (Mimusops elata), abound in the virgin forests north of Rio; the timber of both is exceedingly hard and extensively used in carpentry and cabinetmaking. From the latter is extracted, by incision, a whitish, sweet, savory fluid, commonly used while in a liquid state as milk, in tea and coffee; after some hours it coagulates, forming a white elastic mass resembling India-rubber. The bark is very rich in tannin, and is much used in dyeing. The total height of these trées, stem and crown, may be estimated at from 180 to 200 feet; the vast dome of their foliage rises above other forest trees, as does that of a cathedral above other buildings in a city. Logs 100 feet long, squared, from these trees, are not uncommon at the sawmills near Belem. The growth of the buttress-shaped projections around the lower part of the stems, not only of the trees just mentioned, but of all of the larger trees, is a remarkable feature of the forest; the buttresses, generally thin walls of wood, form enacious stall-like compartments capable of holding a half dozen persons, and serve as props to the enormous stems.

#### Economical Use of Coal.


The success of most manufacturing processes depends to a great extent on the economical use of the fuel employed. It is painful to contemplate the enormous waste of fuel which often occurs, and it it is not surprising to find that many minds have been busy in endeavoring to arrange a form of furnace which shall generate and utilize a maximum of heat from a minimum of fuel. Recent inventions. says the Brewers' Guardian, seem to indicate that we shall, before long, have practical methods contrived for the conversion of coal into gas before it is used for heating purposes; by taking a given weight of

coal and distilling it, and thus separating the solid and gaseous constituents, we undoubtedly effect an economy; the difficulty hitherto has been, and now is, to effect this separaed as an economical fuel; but the man who first invents a prac-

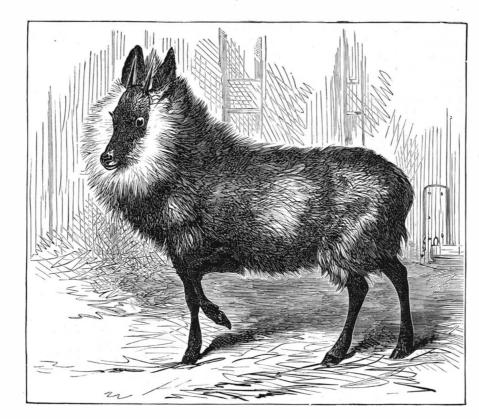

THE JAPANESE GOAT ANTELOPE.

The digging of the canal from Cronstadt to St. Petersburg der the belly, the fin was continuous. The head had no sem- is progressing so rapidly that Admiral Possiett, who directs blance to a cod. The teeth were fairly well developed and the work, has assured the Russian government that vessels sharp. In color it was yellow, with spots. Those who have of light draught will be able to reach the capital by next and under sides of the horizontal branches of the lime (Tilia

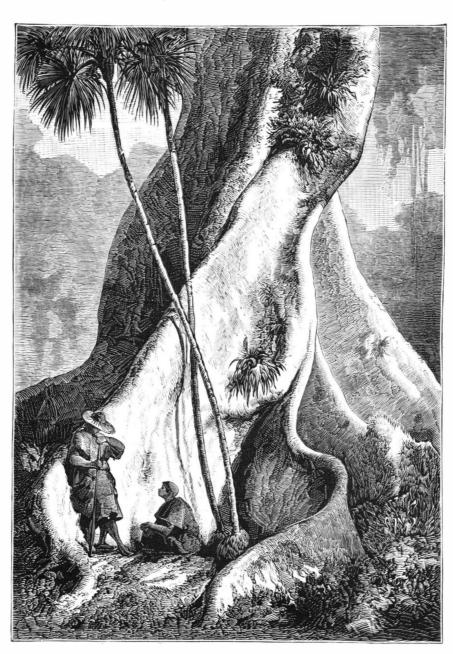

ROOT OF A GIANT TREE.

#### NATURAL HISTORY NOTES.

The Annual Rings of Trees.—Does a single zone of wood invariably indicate the entire annual growth of a tree? This is a question that has not as yet been satisfactorily answered. Generally speaking the number of concentric rings present in a cross section of a trunk will afford a tolertical method of burning coal, so that it is first converted into ably correct idea of the age of that particular part of the The Japanese goat antelope (Capricornus crispus) is, as its its solid and gaseous constituents, which are subsequently in trunk from which the section is taken. To obtain as nearly

> as possible the age of a tree the section must, of course, be taken from the base of the trunk. It is not easy, however, to prove whether two or more rings are sometimes formed in the trunk of a tree in one year, because it would be necessary to know beforehand the exact age of the tree, and cut the tree down to determine the point. Several writers have given it as their opinion that two rings are occasionally formed in one year, caused by an interruption and resumption of growth. Some of them agree that when there are two rings formed in one season they are not so sharply defined as when there is only one in each season. Last season Mr. L. Kny made some observations and experiments in England with a view of obtaining some more satisfactory and positive results than previous writers had placed on record. At the end of June he completely stripped a number of young trees of their leaves, thinking he would be able to determine the point from their autumn shoot; but being in a nursery quarter they made too little growth for the purpose. But nature herself gave him the best opportunity. The caterpillars of Lymantria dispar stripped a large number of trees of their foliage about the same time, and many of them made strong autumn shoots, so that Mr. Kny was able to determine that, in some instances at least, a second distinct ring is formed in one summer; and these rings are as sharply

fish at Mr. Blackford's, it was found to have some very pe-1 the same furnace burnt so as to develop the greatest amount defined and as distinct from each other as the autumn growth one year's ring and the spring growth of a succeeding year's ring. On the other hand, he observed a noteworthy difference in the degree of distinctness in different species of trees, and in the same tree at different heights, and even in the same internode. Moreover, there was a difference in the degree of distinctness of the two rings on the upper parvifolia). Respecting the degree of distinctness at differ-

ent heights, it was ascertained in the branches examined that there was a gradual decrease in distinctness from the younger to the older internodes, until all traces of a second ring seem to disappear. But there is this limitation to it: the two rings are not most distinctly separated in the uppermost internode, but in the second or third from the top. These investigations, as far as they go, seem to show that summer interruptions of growth are too brief to affect the whole system of a large tree, consequently the number of concentric rings of wood in the trunk of a tree represent very closely the actual age of the

The Consciousness of Pain in Inferior Animals.-Professor T. Rymer Jones, in writing of crustaceans, takes occasion to make the following remarks in regard to the susceptibility to pain of these and other animals. Is it really true in philosophy, says he, as it has become a standing axiom in poetry, that-

"The poor beetle, that we tread upon, In corporal sufferance feels a pangas great As when a giant dies "?

This is a question upon which modern discoveries in science entitle us to offer an opinion, and the result of the investigation would seem to afford more enlarged views relative to the beneficence displayed in the construction of animals than the assertion of the poet would lead us to anticipate.

Pain, "Nature's kind harbinger of mischief," is only inflicted for wise and important purposes—either to give warning of the existence of disease, or as a powerful stimulus prompting to escape from danger. Acute perceptions of pain could scarcely, therefore, be supposed to exist in animals deprived of all power of remedying the one or of avoiding the other. In man the power of feeling pain is indubitably placed exclusively in the brain; and if communication be cut off between this organ and any part of the body, pain is no longer felt, whatever mutilations may be inflicted. The medulla spinalis, which corresponds to the ventral chain of ganglia in articulated animals, can perceive external impressions and originate motions, but not feel pain; hence we may justly conclude that in the articulates likewise, the supra-œsophageal ganglia, the representatives of the brain, and the sole correspondents with the instruments of the higher senses, are alone capable of appreciating sensations of a painful character. Thus, then, we arrive at a very important conclusion, namely, that the perception of pain depends upon the development of the encephalic masses; and, consequently, that as this part of the nervous system becomes more perfect, the power of feeling painful impressions increases in the same ratio; or, in other words, that inasmuch as the strength, activity, and intelligence of an animal, by which it can escape from pain, depends upon the perfection of the brain, so does the perception of torture depend upon the condition of the same organ. How far the feeling of pain is acutely developed in the animals we are now considering (articulates) is deducible from everyday observation. The fly seized by the leg will leave its limb behind and alight with apparent unconcern to regale upon the nearest sweets within its reach; the caterpillar enjoys, to all appearance, a tranquil existence while the larvæ of the ichneumon, hatched in its body, devour its very viscera; and, in the crustacea, of so little importance is the loss of a leg, that the lobster will throw off its claws if alarmed by the report of a cannon; and, again, should the claw of a lobster be accidentally damaged by accidents, to which creatures incased in such brittle armor must be perpetually exposed, the animal at once breaks off the injured member at a particular part, namely, at a point in the second piece from the body; this operation seems to produce no pain. How Caterpillars are Protected.-Mr. A. R. Wallace, in

"Science for All," says that it is among caterpillars that protective coloring is most general and conspicuous. An immense number of these creatures are green, corresponding with the tints of the leaves on which they feed, or are brown when they rest on bark or twigs; while a large number of the larvæ of the geometridæ, or "loopers," have the habit of sticking themselves out rigidly, like sticks, which they exactly resemble in shape as well as color. Every one knows, however, that there are a number of very brightly colored caterpillars, and it may be asked how these are protected, or The answer to this question is most instructive, and affords the most conclusive proof that various examples of protective tints in nature really have the effect we impute to them. It has been found by repeated observation and experiment that every green and brown caterpillar, without exception, is greedily eaten by birds and even by frogs, lizards, and spiders, and that they endeavor to conceal themselves from these numerous enemies by feeding usually at night, while during the day they remain motionless upon leaves, twigs, or bark of the same color as themselves. The brightly colored caterpillars, on the other hand, were found to be universally rejected by birds when offered to them, and even the common spotted caterpillar of the magpie moth (Abraxas grossulariata), nor those of the Cucculia verbasci, Callimorpha iacobea, or the Anthrocera fillipendula. Sometimes the caterpillars were seized in the mouth, but always dropped again, as if in disgust at their taste. The same rule was found to apply to all hairy or spring caterpillars; and, what is very interesting, the habits of these creatures are correspondingly different from those of the green and brown eatconceal themselves, but feed openly, as if courting observation and secure in the knowledge of their safety from all enemies.

Under the caption of "A Poisonous Caterpillar," New Remedies quotes from the Journal of the Royal Microscopical Society an account of a poisonous caterpillar lately discovered in Brazil, and the effects of which, when the spines with which it is covered come in contact with the skin, are described as very severe, and consist of redness and burning of the part, and acute pain, extending; when the hand is the part affectthose above described. To this we may add that the cater- found, but the extent of the deposits is not known. pillars of many of our other moths are equally poisonous to Common potash is found in great abundance, and among ing; the caterpillar of the common vanessa butterfly (Vanessa antiopa), and the "wooly bear" caterpillar (Arctia Isabella), both of which are poisonous to children; the caterpillar of the Maia moth (Vanessa Maia), which is armed with spines that are still more annoying, stinging the hand like a pound sulphide of carbon prisms, was constructed by M. nettle although accompanied by an acuter pain. Some years ago Mr. J. A. Lintner, of Albany, made some experiments sion of light than had been attained previously. With its aid upon himself with this larva, and recorded the results in an he has produced a remarkable map of the solar spectrum. The interesting article in the "Twenty-third Annual Report of work was done in Italy, as the Italian climate offers great adthe Regents of the University of the State of New York." vantages in this respect over that of Paris. Prince Nicholas Mr. Lintner says that this caterpillar possesses a color in of Oldenburg, who has taken a lively interest in the subject, marked contrast with the leaves on which it feeds, so that provided M. Thollon with a small observatory at San Remo searching eye of bird or parasite that preys upon it; but the french Academy) is no less than 10 meters (about 33 throat, no inducement to repeat the experiment.

#### An Ancient Rose Tree

climber, for it is supported against the wall of a church) fication of the solar lines, which is as follows: 1. Lines growing in his town, and which was in existence when formed of a nebulosity without a nucleus. 2. Lines formed Christianity itself was little more than 1,000 years old; and, of a nucleus without apparent nebulosity. 3. Lines comif tradition is to be believed, had even then been blooming posed of a nucleus and a nebulosity, but where the nebulonearly 300 summers. "The oldest known rose tree in the sity predominates. 4. Lines composed of a nucleus and a world," he says, "is one at present growing against the wall nebulosity, where the nucleus predominates. of the cathedral of this town (Hildesheim), remarkable alike for its extreme age and for the scanty nourishment with which it has supported itself for so many centuries. It varies but slightly from the common dog rose (Rosa canina); the leaves are rather more ovate, the pedicels and lower leaf surfaces more hairy, and the fruit smaller and more globular. The stem is two inches thick at its junction with the root, and the whole plant covers some 24 square feet of the wall. Bishop Hezilo, who flourished between 1054-1079, took special interest in this rose as being a remarkable monument of the past; and when the cathedral was rebuilt, after being burned down in 1061, he had it once more trained against the portion of the wall which had been spared by the fire. Tradition states that, in the year of grace 814, the Emperor Ludwig the Pious, son of Charlemagne, was staying with his court at Elze. Being desirous of hunting in the huge forest where now stands Hildesheim, mass was said by the imperial chaplain at the place of rendezvous. By some mishap, when the service was concluded and the party dispersed, the vessel containing the sacred elements was left behind. On returning to the spot the following day, great was the surprise of the chaplain to find the holy vessel overshadowed by the tender branch lets of a lovely rose, which had sprung up in the night, and now filled the air with the perfume of its flowers. The emperor shortly after arrived, and by his command a chapel was built, with the altar standing on the spot occupied by the roots of the rose, that very rose which is now blooming as freshly as though a single decade, and not a thousand years, had passed over its head." But, tradition aside, certain it is that the roots of the existing rose tree are buried under the altar of the cathedral, and consequently inside the building, the stem why the others need protection if these can do without it. | being carried through the wall to the outer air by a perforation made expressly for it.

#### A Nevada Saline Valley.

About 15 miles northwest of Columbus, Nevada, is a level valley of over 4,000 acres, known as Rhodes' Salt Marsh. It is evidently an ancient lake bed, and is surrounded on all sides by high volcanic mountains. According to the Enterprise, of Virginia City, this valley is underlaid, a foot or two below the surface, with a solid floor of rock salt, as transparent as ice. Indeed, when the sand that covers the surface is stripped off the salt below bears a very close resemblance to a field of ice. In many places little streams of water bubble by lizards, frogs, and spiders. None of these would touch up through the mass of salt, and very frequently deep pools are found which look just like the air holes in a frozen lake. The salt made at the marsh is perfectly pure. When a tract of ground has been stripped of the surface soil the salt water rises over the bed of rock salt to the depth of a foot or two. Then crystals of salt begin to form on the surface of the water, and as they form they sink to the bottom. If the salt is to be fine, for table use, workmen stir these crystals about with shovels as they settle to the bottom, thus breaking them  $\begin{vmatrix} \mathbf{o} \\ \mathbf{disk} \end{vmatrix}$ able species. They all feed during the day; they do not up. For use in working silver ore coarse salt is as good as fine, and the solid formation may be dug up with picks if necessary, but the loose crystals are more readily handled, and as much salt of that kind is formed as can be disposed

Not only are there inexhaustible stores of salt in the little valley, but immense stores of borax. This borax is of the finest quality known, and two or three cents per pound more can be obtained for it in Europe than for any other borax sent to that market. Splendid specimens of tincal, or natural crystals of borax, are found in the marsh embedded in the ed, quite to the armpit. The editor of New Remedies re- clay near the surface. Immense quantities of sulphate of marks that the larva of the Io moth (Hypercheiria Io) of this magnesia (Epsom salt) and sulphate of soda (Glauber salt) in country is capable of causing symptoms quite similar to a pure state are also found. Nitrate of potassa (saltpeter) is

man, and it is to the presence of these irritating bristles, un- the curious specimens to be obtained are what are called doubtedly, that they seem to be distasteful to birds and other "cotton balls" (boreate of lime) and the fibrous crystalline enemies, as remarked by Wallace in the above note. Among borax. Also there is found an abundance of an unknown the poisonous kinds that occur to us at present, we may mineral. It is something described in none of the books. It mention the "saddle-back caterpillar" (Emmetia stimula), does not appear in the shape of crystals vet has a regular which causes the hand that has been touched by it to swell form of its own, presenting the appearance of branches of the view, even in a few hours. up, with watery pustules, accompanied by intolerable itch-coral. It is thought that this may be some new salt. A quantity of it will shortly be sent East for examination.

### A New Map of the Solar Spectrum.

Several months ago a new spectroscope, containing com-Thollon, wherewith he effected a very much greater disperhundred lines in a length of three meters. M. Thollon has five miles; time, twenty-eight hours.

devoted great care to reproducing the physiognomy of each Herr Leunis, a well known botanist of Hildesheim line; and there are many new features revealed, which will (Hanover), thus describes a remarkable rose tree (or rather | doubtless be utilized for theory. The author offers a classi-

#### Astronomical Notes.

OBSERVATORY OF VASSAR COLLEGE.

The computations in the following notes are by students of Vassar College. Although only approximate, they will enable the ordinary observer to find the planets.

POSITION OF PLANETS FOR SEPTEMBER, 1879.

On September 1 Mercury rises at 4h. 25m. A.M., and sets at 5h. 46m. P.M.

On September 30 Mercury rises at 5h. 36m. A.M., and sets at 5h 38m P M

Mercury should be looked for early in the morning; it is at its greatest elongation on September 9, when it will rise a few degrees north of the point of sunrise.

On September 1 Venus rises at 8h. 13m. A.M., and sets at

On September 30 Venus rises at 5h. 20m. A.M., and sets at 4h. 38m. P.M.

Venus may be followed in its early evening setting for a few days in September; it then sets so nearly with the sun as to be lost in the twilight; it is in inferior conjunction with the sun on the 23d.

Late in the month Venus may be seen before sunrise.

Mars

Mars, Jupiter, and Saturn will be seen in the evening sky during September.

Mars rises north of east on September 1 at 9h. 35m. P.M.; on September 30 at 8h. 1m. P.M.

Mars is in conjunction with the moon on September 6; the planet is 7° south of the moon.

Jupiter.

Jupiter, the largest of the planets, and as seen through small telescopes far the most interesting, is at its best position early in September.

It rises on September 1 at 6h. 31m. P.M., and sets at 5h. 19m. A.M. of the next day.

On September 30 Jupiter rises at 4h. 29m. P.M., and sets at 3h. 7m. A.M. of the next day.

If we take the hour between 9 and 10 P.M. for our observations, the most favorable nights for watching the motions of Jupiter's moons will be:

September 5, when the first satellite, or that nearest to the planet, will be seen to leave the face of Jupiter, having been between the earth and the planet.

September 7, when the third, or largest, moon will pass rom the face, followed by its black shadow.

September 13, when the fourth moon, which is the most remote from Jupiter, will move from the planet in the same

September 14, when the third, or largest, satellite will, during this hour, from 9 to 10 P.M., be seen to enter upon the

September 27, when the first moon will disappear by going behind the planet.

September 28, when the first moon will reappear in the sky during that hour, having been in front of Jupiter; and the second, or smallest satellite, will disappear by going behind Jupiter.

Saturn.

Of the three planets seen in the east in September, Jupiter ises first, Saturn second, and Mars is the third.

On September 1 Saturn rises at 8h. 2m. P.M., and on Sepember 30 Saturn rises at 6h. 4m. P.M.

Saturn is in conjunction with the moon September 3, south of the moon about 81/2°. Saturn's light is white; it is smaller than Jupiter, and further from us. It appears much less brilliant, but it is in northern declination, while Jupiter is more than 10° below the celestial equator, so that Saturn at the time of meridian passage is nearer our zenith. Saturn comes into its best position the last of September.

Seen through a glass powerful enough to show its many moons, Saturn is an object of unceasing interest, the positions of the moons and their changes giving great variety to

Uranus is not likely to be seen, even with a telescope, during September.

It rises on September 1 at 5h. 8m. A.M., and sets at 6h. 24m P M

On the 30th Uranus rises at 3h. 24m. A.M., and sets at 4h. 34m. P.M. Neptune.

#### On September 1 Neptune rises at 9h. 6m. P.M., and on September 30 Neptune rises at 7h. 11m. P.M. A Difficult Swim.

The public is getting a trifle weary of Paul Boyton's swimming feats, yet it may be worth noting that he found his reeven a solitary individual would be ill fitted to escape the for his operations. The map (which has been presented to cent swim from Long Branch to Coney Island "twice as terrible and severe" as the swim across the English Chancourageous bird that should venture an experimental taste feet) in length, and is composed of about four thousand nel, which attracted so much attention a year or two ago. would find in the stinging bristles, as it passes down its lines. The well known map of Angström contained sixteen The distance from Long Branch to Coney Island was thirty-

#### BESSEMER STEEL.

[Continued from first page.]

minutes. The charge of iron is first melted in a cupola and allowed to run into the converter, previously heated to redness. Before the converter is turned up into a vertical position, the blast is turned on to prevent the entrance of the melted iron into the blast holes of the tuyeres. The air, at a pressure of 20 to 25 pounds per square inch, penetrates the melted metal from 144 apertures, coming into contact with every particle. At first a reddish yellow, faintly luminous flame issues from the neck of the converter; soon it becomes more brilliant, the metal becoming in the meantime hotter and being violently agitated. Sparks appear, consisting of particles of iron and slag, which are thrown out by the rapidly disengaged gases. At this point the roar of the flame becomes terrific. and the light is intense.

During this portion of the process the iron, if it contains much silicon, would be overheated were it not for the introduction of masses of cold pig iron, which keep the temperature down. It is sometimes necessary to introduce coldiron to the amount of two tons. The iron is thrown in at the mouth of the converter in the manner represented in the engraving. This is necessary in case the iron is rich in silicon, as the very high temperature which would otherwise be produced would generate gases in great quantity, which make blow holes, cracks, and imperfections of various kinds in the ingots.

After some minutes blowing the sparks cease, the action becomes less violent, and the flame presents the bluish violet characteristic of carbonic oxide; finally, when the whole of the carbon is oxidized, the carbonic oxide flame is replaced by a stream of intensely heated gas, consisting chiefly of nitrogen resulting from the oxidation of the iron by the air. At this moment the foreman turns down the converter and shuts off the blast. A few seconds delay at this point may entirely spoil the product. A quantity of spiegeleisen, equal to 8 or 10 per cent of the whole, is now run into the converter, when another flame reaction occurs. The converter is turned still further down, and the steel runs into the ladle supported by the hydraulic crane standing in the center of the circular pit. Around the side of the pit, opposite the converters, there are fourteen heavy iron ingot moulds, seven of them being always in reserve while the other seven are being filled. These moulds contain one ton each. They are lined with a clay wash to prevent grooving and to insure the easy separation of the mould from the ingot. The ladle containing the charge of melted steel is swung around over the moulds, and the melted metal is allowed to escape through a valve opening in the bottom into the several moulds in succession.

After the steel solidifies and cools sufficiently, the moulds are removed from the ingots, leaving them standing. A hydraulic crane outside of the pit, armed with a grapple something like a pair of huge ice tongs, picks up the red hot ingots and places them on an iron car, to be trundled off to the rolling mill, where they are converted into rails, each ingot being sufficient for three or four rails. The largest production in a single day of 24 hours at these works was on December 5, 1878, when 35 tons 19 cwt. (2,240 lb. to ton) were made.

The facility with which these huge pieces of machinery are made to handle such masses of hot metal is something wonderful. The movements of the converters, the air blast, and the ponderous cranes are all controlled by the foreman, who sits in the gallery seen in the background, and by the movement of a few levers admits water here and there under a pressure of 400 pounds to the square inch, moving the strong iron arms with a celerity and precision that could not be attained by other means.

It may not be uninteresting in this connection to give the chemical changes that take place in the converter, as indicated by the changes in the composition of the gas evolved at different stages of the process.

	Min.	Min.	Min.	10 Min.	12 Min.	14 Min.
Carbonic oxide	1071	3·95 8·57	4·52 8·20	19 59 5·58	29·30 2·30	31·11 1·34
Oxygen Hydrogen Nitrogen		.88 86:58	2·00 85·28	2:00 74:83	2·16 66·24	2.00 65.55

The corresponding alterations in the composition of the metal are shown by the following analyses by Snelus of portions taken out of the converter during different stages of the operation:

	rated pon.	Composition of metal after blowing.			Steel.				
	Gray p operate upon,	6 Min.	9 Min.	13 Min.	Ingot.	Rail.			
Carbon { graphitic combined. Silicon Sulphur Phosphorus Manganese Copper	2:070 1:200 1:952 :014 :048 :086	2 170 795 Trace. 051 Trace.	1.550 .635 Trace. .064 Trace.	.097 .020 Trace. .067 Trace.	*566 *030 Trace *053 *309 *039	'519 '030 Trace. '053 '309 '039			

It will be seen that a portion of the sulphur present in the pig is eliminated; the greater part of the silicon is also separated, together with the carbon, and almost in the same proportion; but the phosphorus is not removed, and owing to the oxidation of some iron the amount is actually greater in the finished steel than in the pig iron. The cop per and manganese present in the steel are due to the manganiferous pig iron added at the end of the operation.

The Manufacturer furnishes the following list of Bessemer steel works now in operation in the United States:

The Bessemer steel works of the Albany and Rensselaer

in the United States, having made its first blow February 15, 1865. It has two 7-ton converters. The next was the Pennsylvania steel works, at Baldwin station, near Harrisburg, Pa., which has two 61/2-ton converters, and made its first blow in June, 1867. The third was the Cleveland Rolling Mill Company's Bessemer works, at Cleveland, O., which made its first blow October 15, 1868, and has two 6-ton converters. The remaining eight works went into operation on the dates following: Cambria Iron Company's plant, Johnstown, Pa., July 10, 1871; two 5-ton converters. Union Rolling Mill Company's plant, Chicago, Ill., July 26, 1871; two 6-ton converters. North Chicago, April 10, 1872; two 6-ton converters. Joliet, Ill., March 15, 1873; two 63/4-ton converters. Bethlehem, at Bethlehem, Pa., October 4, 1873; two 7-ton converters. Edgar Thomson steel works, Pittsburg, September 1, 1875; two 7-ton converters. Lackawanna, at Scranton, Pa., October 23, 1875; two 5-ton converters. Vulcan, St. Louis, Mo., September 1, 1876; two 7-ton converters. The last named have been idle for several years, but we understand they will be put in operation on the 1st of October, the company already having orders to keep the works busy for six months. The Bessemer for accelerated motion caused by the earth's attraction, works throughout the entire country are rushed with work. They were, perhaps, never so busy before. Some years ago it almost appeared as if this business had been overdone like as a cushion, the effect would be disastrous, for not less than so many other branches of manufacture in the United States; but it does not look so now.

#### ENGINEERING INVENTIONS.

Powhatan Point, Ohio. The invention is based upon the general principle of the employment of two right-angular is directed toward the object, and the other graduated and provided with another sighting-instrument, which, when adjusted to a certain position upon the bar and turned to the object, indicates by the angle at such position the distance of the object, the distances which the different angles or adding to the first, depending on circumstances which and positions together indicated being previously determined by careful measurement.

an improvement in air-compressing apparatus for locomotives, which consists in forming the wheels of the locomotive, preferably the driving-wheels, with radial air-compressing cylinders and pistons that are operated by eccentric motion of the tire with reference to the main body of the act in succession to force air through the hollow axle of the wheel into a compression-chamber, where it is stored for use in driving the locomotive.

An improved swinging gate, that is to be placed across a railroad track to keep cattle and other animals off, has been morning of the 11th of the present month. patented by Messrs. David A. Walker and John R. Smith, of Fort Benton, Montana Territory. It is to be opened by the contact of the pilot or cow-catcher of the locomotive, and will close automatically immediately after the passage of the train.

A lubricator for journals, provided with a roller arranged longitudinally in contact with the journal, inclosed in a directly with the oil-reservoir, has been patented by Messrs. C. H. Leonard and W. B. Hick, of Wilkesbarre, Pa.

### The August Meteors.

On the 10th of August last the earth, in its accustomed journey through space, reached the outer edge of the supposed meteoric ring which it annually passes through at this period of the year. In the vicinity of New York large numbers of meteors were seen during the night of August 10, some of them being of comparatively large size, very bright, and leaving long trails. Dr. Lewis Swift, in a recent letter to the Rochester Express, gives the following information concerning these remarkable heavenly bodies:

Meteoric astronomy now takes rank as a distinctive branch of astronomical science. Not forty years have elapsed since it was ascertained that star showers are periodical. Even Anderson started to remove it to a safer position. As he then, and for many years after, it was supposed there were but two, called the August and November showers. Now, precipice. Seeing this, and thinking he could save them, not less than one hundred have been detected, and others he sprang upon what he supposed was solid ground between are constantly being added to the list. The accounts of the two openings in the cliff. His footing proved to be nothing showers that occurred in ancient times came down to us but a bush growing outward, and gave way as he stepped clothed in such extravagant language that, until the great upon it. He was precipitated 260 feet, striking upon rocks believe them. Now they know not only the cause, but are in an upright position, tightly wedged between rocks and able to predict their recurrence with almost as much exact- trees. His face was so cut and torn by the rocks that it could ness as eclipses, and the popular mind observes these displays with equanimity and delight instead of fear and alarm, or thinking the day of judgment has come. Science has killed; and though severely injured was, at last reports, likely disarmed not only them, but eclipses and comets as well, of to recover.

All know what a shooting star looks like, but no living man can tell us what it really is, for not one has ever been known to reach the earth. Those heavy, stony, and still more weighty metallic masses, called meteorites, meteoric stones, etc., which occasionally fall to the earth from the celestial regions, of which the one that recently fell in Iowa was a remarkable example, belong to another class of objects entirely, of the origin of which man knows nothing.

A shooting star is only visible while undergoing the process of combustion, which lasts from one to three seconds, seldom longer. Previous to this they exist in a dark, prob-

small to be seen by daylight, and in the night, being in the earth's shadow, are eclipsed, and consequently invisible. Only while being burned are they visible to us, as then they shine by their own light.

Each meteoroid moves in an orbit, revolving around the sun with as much regularity as the larger planets. In fact, each is in every sense of the word a planet, obeying strictly the laws of gravitation and planetary motion. All space is filled with them; they are as numerous as the sand. The earth and they in their journey round the sun encounter each other; the earth by its superior attraction draws them toward it, but to reach it they must pass through the atmosphere, which not one is able to do. Only meteoric stones are able to reach the earth, and they have their surfaces blackened, and converted to scoria by the terrible heat engendered by the friction with the atmosphere and by arrested motion.

Shooting stars move in all directions, and at velocities probably equal to the earth's, nearly nineteen miles a second. One moving retrograde, therefore (from east to west), would plunge into the atmosphere at a relative velocity of some thirty-eight miles a second, and, if allowance be made probably double that, or seventy-five miles a second. The encounter is fearful, and but for the atmosphere which acts 800,000,000 would rain upon the earth every day.

The source from whence these meteoroids come is comets, especially from their tails. The tail of the great comet of 1811 was 150,000,000 miles in length and 15,000,000 in diam-An improved instrument for measuring the distance of a eter. It is improbable in the highest degree that the comet remote object has been patented by Mr. John Boger, of could gather its tail to itself again. It is left behind, forming part of a ring, which in time may become continuous. Another comet comes and it does the same, and during the bars, one of which is provided with a sighting glass, and ages which are past this process has been going on till the interplanetary spaces are filled with not only meteoroids, but something still more marvelous.

In about three thousand years that great comet will return again and repeat the process, forming part of another ring, need not be considered here. Whenever the earth, in its annual journey, passes through any ring made by some comet, Mr. William Jackson, of Millerstown, Pa., has patented no man knows when, we get a star shower. The four most notable ones in our times take place at the following dates, namely, on the mornings of August 11 and November 14. and the evenings of November 24 and 27. The last two are caused by the earth passing through the track of meteoroids left behind by the fragments of Bida's comet, which divided wheel, so that as the locomotive moves forward the pistons into two parts in 1846. In this way meteoric rings are formed, of which the solar system is filled, but none are visible to us, except those the earth passes through. By some such process was the August ring formed, which the earth passed diagonally through on the evening of the 10th and

The first August shower mentioned in history occurred on July 25th, A.D. 811, and has appeared with unfailing regularity down to our own time, except a break of eightythree years between 841 and 924, and another and much longer one of three hundred and ten years, between 933 and 1243, owing, probably, to breaks in the ring, or, which is more likely, to a failure to record them. The period of the above top slot of bearing, and connected by a corresponding slot comet is about one hundred and twenty-three years, and it will therefore make its next appearance about the year 1985.

The eccentricity of the August ring is very great, its perihelion distance being equal to that of the earth, and its aphelion distance far beyond the orbit of Neptune, making the circumference of the ring more than 11,000,000,000 miles, and as the earth is ten days passing through it, its thickness must be at least 16,000,000 miles.

#### A Fall of 260 Feet.

Recently Mr. David M. Anderson, of this city, joined a party of friends who had been picnicking on the Palisades, near Englewood, N. J. Being engaged in business during the day he did not join the party until evening. The horses were hitched near the edge of a deep gorge which indents the face of the cliff, and one of them becoming restless Mr. stepped forward, horse and carriage began slipping over the star shower of November 13, 1833, astronomers were loth to and stones as he partly fell and partly slid. He was found with difficulty be recognized. Near him lay the dead horse and broken carriage. Strange to say, Mr. Anderson was not

### Mr. Gladstone on America's Future.

At the opening of the Art Exhibition at Chester (Eng.), August 11, Mr. Gladstone said that when America learned to trust entirely to her own splendid natural resources, the great genius of her people, and their marvelous proficiency in the adaptation of labor-saving appliances, in which she was at the head of the world, she would be a formidable competitor with the English manufacturer.

Are we to infer that America has not yet become a "formidable competitor" to England? If so, the attention which American manufacturers are receiving in England Iron and Steel Company, Troy, N. Y., was the first erected ably solid condition, not much, if any, larger than peas, too must be curiously out of proportion to existing conditions.

#### Adaptation of Electricity to Useful Purposes.

Until the invention of the electric telegraph it had not been found practicable to apply the power stored up in electricity to useful purposes. Its nature and characteristics had indeed engaged the attention of scientific investigators for many years, and nebulous ideas of the possibility of utilizing it for the service of mankind had occurred to those who were engaged in its study, but without practical result. Finally Cooke in England and Morse in America, neither of whom looking blue). From these groups the small star may be belonged to the scientific fraternity, succeeded in solving the reasonably supposed much further distant than the large one; problem which had so long baffled the most able scientists of in fact, near the confines of the visible world. May not this the world, and invented systems of electric-telegraphic communication which proved to be practical and successful. It in celestial space, acting on luminous rays which traverse it is but justice, however, to concede that their inventions were | quite like our own atmosphere, of which it is, perhaps, only possible through the investigations and discoveries of merely the continuation? the philosophers who for so many decades previously had made electricity a study.

These inventions have had an importance and a far-reaching effect, which probably was but dimly foreseen, even by portant articles of food and clothing in Lewiston in 1860 and the inventors or the enthusiasts whom they succeeded in interesting in their inventions. Within little more than the in determining whether farm products and the wages of life-time of a generation they have revolutionized the social labor to-day will secure more or less of the conveniences of and business systems of the world. Year by year the tele- life than they would before the war: graph is more and more indispensable, and has already become so essential that a total suspension of telegraphic communication, even for a day, would be regarded as a public calamity. The crude but effective apparatus at first used has been simplified and improved upon, and the capacity of conductors for electrical transmission has been developed and practically utilized, and these have become so familiar to the public that results which but a short time since would have been regarded as marvelous and scarcely credible, are now looked upon as of no very special note. Inventions which double and quadruple the available capacity of conductors are not regarded as worthy of special notice, and we are looking expectantly for the time when these results shall be notably exceeded, and six, eight, and even a larger number of circuits shall be regularly operated over a single conductor, as six and eight have already been worked in experi-

The speaking telephone opened up a new field of telegraphic experience and research, and although but recently in- and some other articles of farm produce are higher than bevented, has already been generally adopted for special and fore the war, while most articles of manufacture, pork, corn, private lines. By means of telephone exchanges, which are sugar, prints, and sheetings are lower than before the war. being established in all parts of the country, a person is Butter, hay, and flour are about the same. On the whole, a placed in direct oral communication with the persons and | family can probably purchase the necessaries of life at least places of business of those with whom it is desired to confer, as cheaply as before the war, while wages are generally higher looked for. No platinum has yet been found in Nevada. and thus business and social intercourse is facilitated and than they were then. The expenses of many families are promoted. The number of telephones already manufactured greater than before the war, because flush times led all of us and in use in this country is probably not less than 50,000, into new purchases. More and better clothing is bought, and is being increased as rapidly as they can be manufac- many and more frequent changes in obedience to the dictates tured. It naturally makes its way more slowly in Europe, of fashion are made, and many more articles of luxury are but is being extensively introduced there, and the American purchased than before the war. By the practice of as strict system of telephone exchanges is beginning to be looked upon with favor.

By the invention of the telephone we are enabled not only to communicate orally over considerable distances, but also to study the utterances of nature. The voices of the volcano and the earthquake, telephonically reported, reveal to us the that we ought to export cream to be eaten with the canned titanic workings in the great laboratory of the earth. The fruit which we send abroad so largely. He says, in a recent lightning announces its coming before even the flash is visi- letter to the Herald: ble. The pulsations of the vital fluid within our veins and arteries convey to the ear of the physician and surgeon valu- and at a price which would be remunerative. What practiable information of our physical condition. Daily new uses cal difficulties there may be in putting cream into tins, and are found for the telephone and microphone, and it is not whether the lactic acid would act upon the tin injuriously, likely that these will be soon exhausted.

Electricity guards our buildings and property against the spread of conflagrations and the attacks of burglars and thieves; it gives us light rivaling almost the brilliancy of an unlimited supply of cream would not only be a boon to 25 lb. in weight, was attracted by the baits, and coming the sun itself; it pierces the hardest rocks and metals, and the householder, but would be of service to the medical pro- close in, swam backward and forward in front of the stand furnishes the motive power required to run our sewing ma- fession. Cream with stewed fruits would be a very palatable chines. It traces our pictures, and prepares the plates for food, much more so than cod liver oil, and could be had all water. The negroes kept feeding the fish for some time to the printer; it regulates the movements of our clocks and through the winter if prepared in the manner I suggest. For give it confidence. A very strong piece of cord, with a hook plows our fields (though not the latter as yet to any con- invalids, dyspeptics, and convalescents such a dietary in like a salmon gaff made fast to it, was then baited with a siderable extent). It is, in fact, becoming the universal ser- winter would be most desirable, to say nothing of those who vant and agent of mankind, and it is impossible for us to would take it from choice, conceive to what uses it may not yet be put for our conventhrough electrical agency that the public mind is prepared the English consumer would be grateful." to credit even the most marvelous achievements which may be claimed for it. It is indeed a wonderful manifestation of a force without doubt co-extensive with the universe itself. and one of the most useful and terrible agencies.—Journal that there is a fortune awaiting the man or woman who can caught hold of the line and pulled the fish straight out on to of the Telegraph.

#### The Colors of Double Stars.

pend in any way upon their relative distance from the observer, M. Niestein, of the Brussels Royal Observatory, has grant shrubs. A package is wanted that will protect the drawn up a table of colors of 20 binary groups, according to handiwork and pride of the dairymaid from the ruthless, nearly a century of observations by astronomers. The results of his inquiry, as given in the London Times, are briefly makers want to place their choicest butter in its freshness,

- 1. In systems with well marked orbital motion, and especially in those of short period, the two components have touch of any middleman. He may be and must be their carordinarily the same yellow or white tints.
- 2. In systems, about which we have color observations sufficient to enable us to connect the color with the position of in the transit from the milk house to the table of the conthe satellite in its orbit, the principal star is white or pale sumer. yellow, when the companion is at its periaster (i. e., nearest the principal), whereas, in the other positions, it is yellow, for the imagination of the buyer is first and mainly appealed gold-yellow, or orange.
- 3. The companion follows the principal star in its fluctua-inose, and that not offended, the butter must be tasted. If | made by the plaintiff.

tion of color, and often surpasses that in color as it withdraws from periaster.

- 4. The same similarity of tints in the two stars appears both in binary groups with rectilinear motion, and in those with orbital motion and long periods of revolution.
- 5. In perspective binary groups the companion is almost always blue. This last observation is thought to point to a superposition of tint (as in the case of distant mountains blue color (it is asked) be due to a gaseous medium expanded

#### The Cost of Living.

The following table of the retail prices of the more im-1879 will be found, says the Lewiston (Me.) Journal, of value

	May 11,	1000.	May 11, 1879.
	Retai	i <b>l.</b>	Retail.
Beans, bushel	\$1.25@	\$1.75	<b>\$1.</b> 70 @ <b>\$1.</b> 85
Beef, pound	. 60	12	" 8 @ " 20
Cheese, pound	. 10 @	12	10 @ 12
Chickens, pound	. 9@	11	12 @ 13
Coffee, pound	12 @	25	15 @ 30
Corn, bushel	@	1.00	-@ 55
Eggs, dozen	12@	14	12 @ 14
Flour, barrel	5.50 @	8.00	
Molasses, Havana, gallon	26 @	28	<b>-</b> @ 40
Molasses, Porto Rico, gallon	35 @	36	<b></b> @ 50
Oats, bushel	-@	40	<u> </u>
Pork, pound	. 800.	10	. 6 @ 9
Potatoes, bushel	. 40@	42	80 @ 90
Raisins, pound	. 10 @		8 0 12
Sugar, white, pound	. 10@	- 11	8 @ 9 5 @ 6
Good print, yard	. 10 @	12	
Sneetings, yard	8 @	12	700 8
Tea, pound	36 @	65	30 @ 60
Butter, pound	18 @	20	18 @ 20
Dry hardwood, cord	4.50 @	500	5.0 0@, 5. 50
Hay, ton		13.00	10.00 @ 13.00

It will be noticed that most of the articles which are higher than before the war are farm products, and this increase is beneficial to the farmers. Beans, beef, chickens, potatoes, economy in all respects as before the war, the same degree of industry would be better rewarded than it was then.

### Who will Can Cream?

"It is quite certain that such cream would soon sell freely, and whether the cream should be prepared after the Devonshire fashion or the ordinary plan, of course I can form no conjecture. But these could soon be overcome I feel sure, and kind of bonito or tunny (Thynnus argentivittatus), of about

"If cream could be so provided, and the practical difficulience and benefit. So much has already been accomplished ties overcome, the American farmer would be benefited and

### A Better Butter-package Wanted.

devise a neat, cheap, tasteful package which will enable the the rock. The negroes evidently felt quite certain of their public their gilt edged butter all redolent with new mown To test the question whether the colors of double stars de- hay, and suggestive of cool springs, shady groves, rich pastures, and peace and plenty among clover blossoms and fragreasy touch of the huckster and grocer's boy. The butter sweetness, and fragrance in dainty pats and attractive form, on the table of their customers unsullied by the defiling neat, cheap, and tasteful butter-package protects the butter

Particular stress is laid on the appearance of the package,

the first appeal is a captivating success, the butter will sell, though the organs of smell and taste be not so highly pleased. Assuming that the butter itself is good and satisfactory in all respects when packed, the dealer, in selecting his package, will be careful to guard against four things, which will depreciate the butter before it may reach the consumer:

- 1. Any foreign taste of wood, or gum, or oil.
- 2. All contact with air.
- 3. The variations of temperature.
- Leakage or soakage.

Pure tin will meet these conditions, but it is too costly. Tin-lined wood answers indifferently well. Paper will not do at all. Possibly, however, a case of moulded paper saturated with pure white paraffine, or some other inert, inodorous, clean, and comparatively inexpensive water and acid proof compound, might answer the requirements for the inner package. Of course the external envelope must be stronger to bear exposure and rough handling. Our inventors ought to take this matter in hand.

#### Platinum in California.

Mr. Edison's call for platinum has developed considerable interest in the search for that metal. According to Prof. Stewart, of Virginia City, Nevada, platinum has been found in Santa Clara county, California, in a seam of talc, incased in hard schistose rock. About two years ago men worked the mine, selling the platinum in San Francisco for \$12 or \$15 an ounce. They mashed up the talc and separated the crystals of platinum by some simple process. The schistose rock was so hard, however, and the seam of talc so narrow being only from 12 to 15 inches wide—that the men were compelled to give up the work as unprofitable. But the professor has an idea that by the application of proper instruments the mine might be made to pay. The seam, although narrow where explored, might widen as depth was gained. At any rate, that probability would be in favor of the miners.

It is also stated on the same authority that in Trinity and Humboldt counties, California, in the early days, the gold was so heavily alloyed with drift platinum that the purchasers of gold dust, not knowing the value of platinum, frequently refused to buy the alloy at all. Sometimes the gold would be alloyed to such an extent that it would not fetch more than \$3 or \$4 an ounce. The presence of platinum joined with the gold of those localities leads Prof. Stewart to think that a body of the mineral might be found there if

#### Catching the Bonito.

At the north point at the mouth of the bay (St. Vincent, Cape Verde Islands) was a regular fishing station, where two young Africans were fishing, and where the whole rock was reeking of dead and decaying fish, and a small cave was full of débris, having evidently been made use of by fishermen for many years. The two young negroes at first occupied themselves in catching small fish with a short bamboo rod, baiting with pounded fish, and catching var-A London physician, J. Milner Fothergill, M.D., thinks ious little rock fish and a scarus. They then began pounding and breaking up the small fish and throwing the largest pieces into the verge of the surf off the point to attract large fish. They watched until they saw a large fish taking these baits on the top of the water, and then they threw a bait on a hook attached to a long cod line. They thus caught a large cavalli (Caraux) of the mackerel tribe, which they had to play for some time and finish with a spear. Large garfish (Belone) sometimes came within reach and were easily caught, being very ravenous. One fish, a on the rock, taking every bait thrown on to the top of the small bit of fish, just enough to cover the point of the hook. and a stout bamboo was used as a rod. The cord was hitched tight round one end of it, with about a foot of it left dangling with the hook. One negro held the rod and the other the cord. The bait was held just touching the surface of the water. The fish swam up directly and took it. The negro holding the bamboo struck sharply and drove the big A correspondent of the Cincinnati Commercial maintains hook right through the fish's upper jaw, and both men tidy housewife and the careful dairyman to place before the fish directly they saw it swimming backward and forward in front of the rock. I was astonished that so large a fish could be caught in so absurd a manner. The negro holding the pole was not six feet from the fish when it took the bait. —H. N. Moseley.

#### RECENT DECISIONS RELATING TO PATENTS, TRADE MARKS, ETC. By the U. S. Circuit Court.-Southern District of New York.

STOVE TRADE MARK.—FILLEY vs. CHILD.

The plaintiff having acquiesced for a long time in the rier, but the wants of the business will never be met until a manufacture and sale by defendant of cooking stoves containing certain improvements patented by plaintiff, and to which the name "Charter Oak" had been applied as a trade mark, and the patent having expired, defendant cannot be prevented from calling such stoves by the name of "Charter Oak," so long as he does not represent them as being made to through the eye. That organ captured, he tries by the by the plaintiff, or induce others to believe that they are

#### Business and Personal.

The Charge for Insertion under this head is One Dollar a line for each insertion: about eight words to a line. Advertisements must be received at publication office as early as Thursday morning to appearin next issue.

The best results are obtained by the Imp. Eureka Turbine Wheel and Barber's Pat. Pulverizing Mills. Send for descriptive pamphlets to Barber & Son, Allentown, Pa.

Fuller & Stillman, Chemical Engineers and Assayers, 40 Broadway, New York,

Catechism of the Locomotive, 625 pages, 250 engravings. The most accurate, complete, and easily understood book on the Locomotive. Price \$2.50. Send for a catalogue of railroad books. The Railroad Gazette, 73 Broadway, New York.

A party is wanted to manufacture, on royalty, a Combination Pick, patented here and in Europe. Address P. O Box 3374, New York city.

Munger's Constant Seated Valve.—Having tested these valves in our own works and elsewhere, for more than a year, under long continued high pressure and other trying conditions, we can recommend it as being the only valve which, under all circumstances, is tight and durable. We are prepared to negotiate for the manufacture of these valves on royalty-or for the sale or a part or the whole of the patent. Address Munger & Son, East River Conn.

The genuine Asbestos Roofing forms the lightest and most economical roof in use. It can be easily applied by any one. H. W Johns M'f'g Co., 87 Maiden Lane, New York, sole manufacturers

Pat. Steam Hoisting Mach'y. See illus. adv., p. 125. Golden Healing Ointment. See adv., page 141.

The Baker Blower runs the largest sand blast in the world. Wilbraham Bros., 2318 Frankford Ave., Phila., Pa. Elliott's Lace Cutter, 25 cts. 80 Market St., Chicago, Ill.

American Watches.-A reduced price list of over 100 styles of solid Gold and Silver Watches just issued by a reliable jeweler, which will be mailed free to any address by N  $\,$  H. White, Newark, N. J.

Linen Hose.—All sizes, with or without couplers, in any quantity. Greene, Tweed & Co., 18 Park Pl., N. Y. The American Standard Gauge and Tool Works of Philadelphia has consolidated with the Betts Machine Company of Wilmington, Del Etandard gauges as well as heavy machine tools now in stock.

Magnets, Insulated Wire, etc. Catalogue free, Goodnow & Wightman, 176 Washington St., Boston, Mass.

Inexhaustible Beds of Kaolin or Clay.-Wanted experienced pottery men to take an interest in the white, pınk, and yellow kaolin beds. Digging and shipping on cars will cost 50 cents per ton. M. J. Dobschutz, Belleville, Ill., Agent.

Forsaith & Co., Manchester, N. H., & 213 Center St., N Bolt Forging Machines, Power Hammers, Comb'd ery Send stamp for illus. cat. State just what you want.

The Electric Light in its Practical Application. By P. Higgs, Numerous Illustrations, \$3.50. Mail free. E. & F. N. Spon, 446 Broome St., N. Y.

Wright's Patent Steam Engine, with automatic cutoff. The best engine made. For prices, address William Wright, Manufacturer, Newburgh, N. Y.

For Solid Wrought Iron Beams, etc., see advertisement. Address Union Iron Mills, Pittsburgh, Pa., for

H. Prentiss & Co., 14 Dey St., New York, Manufs. Taps, Dies, Screw Plates, Reamers, etc. Send for list.

The Horton Lathe Chucks; prices reduced 30 per cent. Address The E. Horton & Son Co., Windsor Locks, Conn. Presses, Dies, and Tools for working Sheet Metal, etc. Fruit & other can tools. Bliss & Williams, B'klyn, N. Y.

Linen Hose.—Sizes: 1½ in., 20c.; 2 in., 25c; 2½ in., 29c. per foot, subject to large discount. For price lists of all sizes, also rubber lined linen hose, address Eureka Fire Hose Company, No. 13 Barclay St., New York.

 $Workshop \ Receipts \ for \ Manufacturers \ and \ Mechanics.$ Illustrated. \$2.00 E. & F. N. Spon, 446 Broome St., N. Y. Nickel Plating .- A white deposit guaranteed by using

ourmaterial. Condit, Hanson & Van Winkle, Newark, N.J. Hydraulic Presses and Jacks, new and second hand. Lathes and Machinery for Polishing and Buffing Metals. E. Lyon & Co., 470 Grand St., N. Y.

Diamond Planers. J. Dickinson, 64 Nassau St., N. Y. Eclipse Portable Engine. See illustrated adv., p. 126. Eagle Anvils, 9 cents per pound. Fully warranted.

Bradley's cushioned helve hammers. See illus. ad. p. 142. Band Saws a specialty. F. H. Clement, Rochester, N.Y.

Sheet Metal Presses, Ferracute Co., Bridgeton, N. J. Split Pulleys at low prices, and of same strength and appearance as Whole Pulleys. Yocom & Son's Shafting Works, Drinker St., Philadelphia, Pa.

Noise-Quieting Nozzles for Locomotives and Steam boats. 50 different varieties, adapted to every class of engine. T. Shaw, 915 Ridge Avenue, Philadelphia, Pa. Stave. Barrel. Keg. and Hogshead Machinery a spe-

cialty, by E. & B. Holmes, Buffalo, N. Y. Emery Wheel - other kinds imitations and inferior. Our name is stamped in full on all our best Standard Belting, Packing, and Hose. Buy that only The best is the cheapest. New York Belting and Packing Company, 37 and 38 Park Row, N. Y.

Ornamental Penman's Pocketbook of Alphabets, 32 plates. 20c. Mail free. E. & F. N. Spon, 446Broome St.,

New 81/2 foot Boring and Turning Mill for sale cheap. A first class tool. Hilles & Jones, Wilmington, Del.

Sawyer's Own Book, Illustrated. Over 100 pages of valuable information. How to straighten saws, etc. Sent free by mail to any part of the world. Send your full address to Emerson, Smith & Co., Beaver Falls, Pa.

Best Turkey Emery in bbls., kegs, and cases. Special rates for large quantities. Greene, Tweed & Co., N. Y. Shafting, Pulleys, and Hangers. Nadig & Bro., Allentown, Pa.

\$250 Horizontal Engine, 20 horse power. See illustrated advertisement, page 61.

For Sale.—Very low for cash, Engine Lathe, in good

order, made by New Haven Mfg. Co. 30 inches swing; will turn 12 feet. Apply to Noble & Hall, Erie, Pa.

Milling, Profiling, Cam Cutting, Revolving Head Screw achines. Pratt & Whitney Co., Hartford, Conn.

Hydraulic Cylinders, Wheels, and Pinions, Machinery Castings; all kinds; strong and durable; and easily worked. Tensile strength not less than 65,000 lbs. to square in. Pittsburgh Steel Casting Co., Pittsburgh, Pa.

Wood-working Machinery, Waymouth Lathes. Specialty, Wardwell Patent Saw Bench; it has no equal. Improved Patent Planers: Elevators: Dowel Machines Rollstone Machine Company, Fitchburg, Mas

Tight and Slack Barrel machinery a specialty. John Greenwood & Co., Rochester, N. Y. See illus'd adv. p. 30.

The new "Otto" Silent Gas Engine is simple in construction, easy of management, and the cheapest motor known for intermittent work, Schleicher, Schumm & Co., Philadelphia, Pa.

Machines for cutting and threading wrought iron pipe a specialty. D. Saunders' Sons, Yonkers, N. Y.

Steam Engines, Automatic and Slide Valve; also Boilers. Woodbury, Booth & Pryor, Rochester, N. Y. See illustrated advertisement, page 29.

Wanted.—Responsible party to build and introduce homas' Patent Steam Wheel. Monopoly to right party, Write for description and particulars, to J. C. Thomas

#### NEW BOOKS AND PUBLICATIONS.

DIGEST OF SEEDING MACHINES AND IMPLE-MENTS PATENTED IN THE UNITED STATES FROM THE YEAR 1800 to January, 1879. Compiled and published by James T. Allen, United States Patent Office, Washington, D. C. Quarto, pp. 1,326. Price

By permission of the Commissioner of Patents, Mr. Allen has made, with great care and labor, a thorough digest of all the American patents on seeding machines and implements granted to the beginning of the current year. It embraces nearly 4,000 patents, the drawings copied by photo-lithography, the claims given in full. and also brief descriptions of the inventions in such cases as seem likely to be of service. To facilitate examinations the patents have been arranged chronologically under the official classification of thirty-four subdivisions, and the whole work is so indexed that the drawing or claim of any patent may be found by name. number, or date. The advantage of such a work to inventors, manufacturers, patent attorneys, and libraries goes without telling.



HINTS TO CORRESPONDENTS.

No attention will be paid to communications unless accompanied with the full name and address of the writer.

Names and addresses of correspondents will not be

given to inquirers.

We renew our request that correspondents, in referring to former answers or articles, will be kind enough to name the date of the paper and the page, or the number of the operation

name the date of the paper and the page, or the number of the question.

Correspondents whose inquiries do not appear after a reasonable time should repeat them.

Persons desiring special information which is purely of a personal character, and not of general interest, should remit from \$1 to \$5, according to the subject, as we cannot be expected to spend time and labor to obtain such information without remuneration.

Any numbers of the Scientific American Supplement referred to in these columns may be had at this office. Price 10 cents each.

(1) R. F. B. asks: 1. What is the relative electro-motive force of the gravity battery as compared with the Smee and Bunson batteries? A. The electromotive force of the gravity battery is 1.079 volt; Smee's, when not in action, 1.090 volt; when in action, 0.482 volt; Bunsen's chromic acid, 2 028 volts. 2. Can it be used successfully and economically in electro-plating? A. Yes. 3. How many cells are necessary, and how much zinc surface? A. Use a zinc surface equivalent to the surface to be plated. 4. How often should the zincs be amalgamated in a gravity battery constantly in use? A. The zincs in a gravity battery are never amalgamated. 5. At what temperature (Fah.) should rubber hand stamps be vulcanized, and how long continued in the heat? A. The temperature will vary with the percentage of sulphur incorporated with the rubber. As the rubber is usually prepared it will require at least 2 hours at a temperature of from 250° to 275° Fah. (85 to 100 lb. pressure). See pp. 48 and 105, Vol. 39, Sci-

(2) J. C. W. writes: In answer to query No. 12, in the Scientific American for May 31, 1879, you suggest that F. R. D. may use weak solution of ammonia for removing logwood stains from the hands. I would respectfully offer the following as more effectual and speedy, and will also answer the purpose of removing nearly all organic colors, not only from the skin, but from most fabrics: Prepare a concentrated solution of sulphite or hyposulphite of soda, by dissolving either of Solid Emery Vulcanite Wheels—The Solid Original these salts in water to saturation. I think the sulphite preferable, as the hyposulphite deposits sulphur in the course of the process, which is not always to be desired. This solution may be kept ready for use. Label it No. 1 Prepare a solution of permanganate of potassium in water, using one part of the salt to about one hundred parts of water. It does not keep perfectly well; but as long as it is of a deep purple color it is good. Label it No. 2. Next procure a bottle of ordinary or commercian muriatic acid, which label No. 3. In using this acid it may generally be diluted with from one to ten volumes of water, or if the stain is obstinate it may be used without dilution, and beyond the smarting sensation it produces on the hands no harm will result unless it is used excessively and not washed off soon. If the smarting is too severe it should be washed off at once. and a solution or small quantity of dry bicarbonate of sodium (cooking soda) applied to neutralize the acid. thus converting it into a solution of common salt. Have ing these solutions—namely, No. 1, sulphite of sodium; No. 2, permanganate of potassium; No. 3, muriatic (hydrochloric) acid-they may be used alternately, without much regard to order, except that, as a general rule, No. residue found in my boilers which floats upon the water. 3 must be used last, and the process finished with water I should like to ascertain what it is. A. It consists

applied until the acid is washed away. Nos. 1 and 3 chiefly of silica, silicate of alumina, and lime carbonate, are in most cases sufficient; but should No. 2 be required it should be followed by both Nos. 1 and 3, always finishing with water. Silk and woolen goods will not stand heater. 2. Is there any work which treats fully on the long treatment with these chemicals. Cotton and linen seem to be unhurt unless the acid is used strong and suffered to remain in the fabric until it is dry. I have never known the skin to be injured beyond the temporary stinging above mentioned. Ink stains and iron rust will succumb to these agents if properly managed. As a matter of caution they should not be used on such colored goods as are wished to retain their colors. The bleaching agent is what is ordinarily known as sulphurous acid, and will be recognized by the familiar odor of burning sulphur or matches with sulphur tips. This odor escapes from the hands rapidly, and in this respect the process is far preferable to any in which 11b. of hot concentrated glycerine. Molasses is somechlorine with its disagreeable and more persistent odor is employed. [We have found the use of such reagents seldom necessary; good soap and plenty of water, aided by a little pumice stone, will remove most stains from the hands. When these fail the substances recommended will often prove serviceable; but a small quantity of common bleaching powder, followed by water and a little antichlore (sodium hyposulphite), to destroy any odor occasioned by the former, will generally prove more effectual. For obstinate iron or ink stains, dilute hydrochloric acid should, of course, be used instead.]

(3) A. B. T. asks (1) why salt is used in water is somewhat lower than that of pure water: hence salt causes the rapid liquefaction of ice. A given quantity of ice in melting absorbs a certain amount of heat, and if the liquefaction is accelerated by salt this amount of heat is absorbed in a space of time proportionately less. 2. What is the process of bronzing any article, such as a gun barrel? A. Mix powdered chloride of antimony to a thin cream with olive oil (by trituration), and add a few drops of nitric acid. Spread this uniformly over the warmed iron, and let it remain until the proper color is developed. The brushing and marking is done with the scratch brush and burnisher. Polish with a piece of smooth, hard wood (polishing wood). acquer with thin alcoholic shellac, and polish again.

(4) D. D. asks: 1. Will a 12 foot double deck boiler steam better than a 14 foot one? A. We cannot answer this query without seeing the plans of the boiler. 2. What size of smoke stack do I require for a double deck boiler containing 84 4-inch tubes? A. 36 inches diameter, if your tubes are properly propor tioned to the grate.

(5) E. J. D. asks for recipe for making tar varnish. I have tried to mix the benzine and tar both hot and cold, but have always failed on account of the tar thickening up and curdling. A. The curdling is due boiled oil, and, when nearly cold, reduce with the sol-

(6) G. L. writes: I have a shed with quite a flat roof, shingled a few years ago with poor shingles. and, of course, leaks. What is the cheapest and best composition to put on it to stop the leaks and make the shingles more durable? A. Such roofs are sometimes sprinkled thickly with clean gravel. A roof with a pitch of less than  $30^\circ$  should not be shingled.

(7) J. W. T. asks: What liquid is used in ice machines to make the water freeze? A. Ether, sulphurous anhydride, petroleum ether or chymogene, and liquefied ammonia are commonly employed. See "Ice and Ice Making Machines," Scientific American Sup-PLEMENTS, Nos. 85 and 91, also Scientific American, pp. 159 and 387, Vol. 38, and 95, 335 and 168, Vol. 37.

(8) W. M. H. asks: Is a pound of baker's bread as nourishing as a pound of home made? What is the best test to discover whether corn starch intended for food has been adulterated? A. Usually the difference in this respect is not great; in many cases the former is to be preferred. The corn starch found in our markets is usually quite free from adulteration. No single test would suffice to detect the foreign substance which may be present. You would require the assistance of an analyst.

(9) J. R. L. asks: 1. Has granite ware proved safe for cooking utensils? A. Yes, when properly made. 2. Is it likely to be superseded by the new mode of treating iron vessels with superheated steam, noticed lately by you, whereby the liability to rust is obviated? A. Probably not. 3. Is annealed glass ware in the market? If not, why not? Have seen nails driven with a hardened glass chimney; but beyond this know of no ware of hardened glass on sale? A. Yes, but the manufacture is chiefly confined to lamp chimneys and similar articles.

(10) S. V. H. asks: 1. What is the resistance of a line, 11/4 miles long, of No. 16 galvanized iron wire? A. 104 ohms. 2. What and how much wire should I put in each spool of an electro-magnet to produce this same resistance? A. About 500 feet of No. 34. 3 Would not a magnet of still higher resistance work still better on this line with a given battery? A. No, the resistance in your instrument and in the line should be equal. 4. At the end of a line I run a wire underground to a well 30 feet from house, in which well I hang a plate of galvanized iron. Should the underground wire be insulated? A. No. 5. A friend and myself made a thermostat of brass and type metal. On heating, the type metal expands the most apparently, as it forces the bar to bend towards the brass. And yet if I understand aright, brass expands much more than type metal in a given variation of temperature. A. The expansion of type metal by heat is greater than that of brass.

(11) J. H. W. M. asks for a first class receipt for a freezing mixture, something similar to salt and ice, but that will last longer. A. For practical purposes the mixture of salt and ice is the cheapest and best. See p. 107 (17), Vol. 38, Scientific American.

residue found in my boilers which floats upon the water.

with a small quantity of carbonaceous matters. Much of this would be removed by the use of a feed water use of the steam engine indicator, and what is it called? A. "The Indicator Diagram," by N. P. Burgh.

(13) D. S. S. asks: Could you give the name of anything that will remove the stain in a Brussels carpet made by a purple aniline ink? A. Have you tried alcohol and hot water? It will be difficult to remove the stain completely without injuring the pattern.

(14) M. L. asks (1) for a receipt for making best printer's composition rollers. A. Soak 1 lb. of fine glue in enough cold soft water for 8 hours. Then heat it in a water bath until it is well dissolved, and stir in times substituted in part for the glycerine, and resin soap and small quantities of oil and earthy matters are occasionally introduced. The heating must be continued until the greater part of the water has been expelled, when the composition is ready for casting in copper moulds, oiled and warmed. 2. What will remove copying ink stains from the hands? A. Use ammonia water, muriatic acid, and plenty of water alternately, assisted by pumice stone if necessary.

(15) R. E. G. asks: What is the relative strength of steel, iron, brass, and copper wire? A. The following table gives the result of recent experiments reezing ice cream. A. The freezing point of salt made by Mr. David Kirkaldy, of London, to ascertain the tensile strength and resistance to torsion of wire made of various materials:

I	Punng stre	ess per sq. mcn.
Specimens of wire	Hard.	Annealed.
tested.	Pounds.	Annealed. Pounds.
Common		
Copper	03,122	37,002
Brass	81,156	51,550
Charcoal iron	65,834	46,160
Coke iron	64.321	61,294
Steel	120,976	74.637
Phosphor bronze, No. 1	159 515	58,853
No. 2	151 110	64,569
" No. 3	120 141	54.111
		53,381
NO. 4		
		of twists in
Specimens of sion in per		5 inches.
wire tested. Annealed		
Copper 34·1	86	8 96
Brass	14.	7 57
Charcoal iron28	48	87
Coke iron	26	
Steel	*	79
	13.	
Phosphor bronze No. 146.6		
110. 20. 42.	15.	
NO. 5. 44 9	17.	
" No. 442.4	13	124
* Of the 8 pieces of steel to	oote 8 hate	d from 40 to 45

twists, and 5 stood from  $1\frac{1}{2}$  to 4 twists.

(16) J. E. L. asks for formula for number of strokes of (1) steam, (2) compressed air, engine when the diameter of cylinder, length of stroke, absolute steam chiefly to the presence of moisture. Heat it in an iron pressure—with valves wide open—are given, the stroke pot to boiling for 7 or 8 hours, add say 10 per cent of to be horizontal and the friction supposed to be zero. A. There is no formula for length of stroke, of any value, although some are given in published works. By a good engineer the length of stroke is determined by the character of the work to which it is to be applied.

(17) G. P. P. asks: 1. What kind of steel is best for a permanent magnet? A. A low grade of cast steel seems to answer best for this purpose. 2. coated with melted asphaltum, and, while this is soft, In what proportion by weight is the powdered carbon and peroxide of manganese used in the porous vase of a Leclanche battery? A. About equal parts. 3. I have the impression that if a current of electricity be passed through chemically prepared paper, the paper will be turned blue; am I right? A. Yes. 4. How is the paper prepared, and what, and in what proportions, are the chemicals used? A. See p. 124 (24), current volume of Scientific American. 5. Is there any way of charging a Leyden jar directly from a galvanic battery? A. No; an induction coil must be used.

> (18) G. D. writes: My friend says his miroscope magnifies 300 times. I say mine magnifies 300 diameters. Assuming that these claims are correct, which is the more powerful instrument? A. If your microscope magnifies 300 diameters, it is equivalent to 90,000 times. Superficial magnification equals the square of linear magnification.

(19) W. S. P. asks: 1. What can I use on a marble imposing stone to harden it, so that it will not be so easily scratched? A. We know of no practical method of accomplishing this. 2. Is sulphur water injurious to steam boilers? A. Yes.

(20) J. K. T. writes: Please give botanical name of plant and commercial name of substance sold as "Persian insect powder"-I mean the powder used for destroying insects, etc. A. So-called " Persian insect powder consists of the dried and powdered flowers of certain species of Pyrethrum—Pyrethrum carneum, P. roseum, and P. cineraria folium. The last named is usually distinguished from the others commercially as Dalmatian powder, and is much more energetic than the others.

(21) M. A. M. writes: I wish to know where I am wrong in making the Japan ink after receipt in the Supplement, No. 157? I have followed the receipt but after using it awhile it will corrode the pen and will not flow freely. A. Use more borax or add a small quantity of soda. 2. What is soluble Prussian blue? A. Soluble Prussian blue is a commercial article and is used for laundry blue.

(22) R. B. asks: How long will a box made of galvanized iron, No. 18 gauge, filled with calcined plaster of Paris in liquid state, remain free from rust holes, or show signs of weakness-it of course being understood the box will have a tight cover on, and the plaster of Paris have the usual amount of sulphuric acid and lime in it? A. Soft water and ordinary plaster will have very little action on the metal. If sealed it would last indefinitely.

(23) H. T. S. asks: Do you know of any solution, acid, or composition, that will remove leading from a gun barrel without injuring the barrel? How can I remove rust from the inside of a gun barrel? A. The lead cannot be removed by chemical means. Gun makers usually supply a tool for mechanically cleaning (12) T. E. C. writes: 1. I send sample of the bore. The rust may be removed by means of emery flour and oil applied on a cloth wound on this

MINERALS, ETC.—Specimens have been received from the following correspondents, and examined, with the results stated:

D. A. R.—Chiefly an amethystine-quartz sand, of little value.—J. G. N.—It consists chiefly of feldspar and biotite, a variety of mica. Not valuable.

#### COMMUNICATIONS RECEIVED.

On Optical Delusion. By S. E. C., C. W. B. On the Optical Delusion. By J. P. McD. On Traveling Rocks. By N. P. S,

[OFFICIAL ]

#### INDEX OF INVENTIONS

FOR WHICH

Letters Patent of the United States were Granted in the Week Ending

July 22, 1879,

#### AND EACH BEARING THAT DATE,

[Those marked (r) are reissued patents.]

Addressing machine, H. D. Farquharson Air and steam engine, J. M. Whiting	217,685
Air and steam engine, J. M. Whiting	217,758
Alarm lock, W. McAdams, Jr	217,809
Animal clamping hook, J. Robertson	217,747
Axle box and journal, vehicle, J. A. Manning	217,698
Baling press, M. Loeser	217,806
Barrel stand, J. Salter	217,749
Bedstead fastener, M. Krickl	
Boiler furnace, Everhart & Kingsbury	
Boiler furnace, steam, Mason & Loring	217,699
Book, copy, H. W. Ellsworth	217,733
Boot and shoe, J. W. Winn	217,761
Boot and shoe sole presser, T. J. & T. H. Gifford.  Bottle stopper, J. Annear	217,687
Bow, E. S. Morton	217,741
Brake appar., fluid pressure, G. Westinghouse, Jr. Brake relief valve, automatic, G. Westinghouse, Jr.	217,836
Brakes, piston diaphragm for power, G. Westinghouse, Jr.	
house, Jr	217,837
Butter package, W. White	~11,000
ture of ornamental, W. F. Niles	
Car coupling, C. Ahrenbeck	
Car coupling, J. M. Dver	217.846
Car coupling, W. W. Scott Car coupling, Watrous & Gerber	217,821 217.757
Car wheel fenders, railway, C. E. Brown	217,676
Car wheel mould, W. Wilmington Carriage top prop, H. A. Robertson	217,840
Catheter, A. Shiland	217,711
Centrifugal machine, S. S. Hepworth	217,689
Check hook, G. J. Letchworth	217,805 217.8 <b>1</b> 5
Churn, E. W. Bullard	217,678
Churns, cream and milk trap for, H. A. Noe	217,742 217,739
Coffin, J. McCarthy	217,829
Condenser, steam engine, W. L. Church	217,845
Cotton press, G. Cooper	217,776
Counting register, E. Stalmann	
Crib, folding, D. Walker Cultivator, G. Moore	
Cutlery scourer, H. P. T. D. de St. Leger	217,714
Dental vulcanizer, J. S. Campbell  Door check, A. Witte	
Ear muff, H. E. Bonham	217,768
Eave trough, F. Otto	
Electric machine, dynamo, C. F. Brush	217,677
Electro-magnetic motor, J. Doyle	217,731
Electro-magnetic motor, J. C. Ludwig	217,825
Envelope, L. H. Rogers	217,707
Eyeglasses, nose clamp for, N. Watry	217,835
Fanning mill, T. Willson	
Farm gate, W. R. Kramer	217,801
splitting and withing the shafts of, G. M. Rich-	0.001
mond (r)	8,821 217.673
Fertilizers, apparatus for treating animal matters	•
for, J. McLaren	217,701
Firearm sight, W. H. Broden	217,770
Firearm sight, O. D. Warfield	217,717
Forge, emery wheel, and drill, P. B. Hillyer	
Gas, apparatus for enriching illuminating, J. & J.	MA (.00
Kidd	
Gas retort, T. F. Rowland (r)	8,815
Gate, G. W. Addis	
Glass, engraving and dressing, R. A. Sawyer 2	217,709
Glass pipe maker, J. B. Ford	217,671
Glove, T. Munthe	17,814
Glove, husking, H. W. Price	
Grain drill, B. Regan (r)	8,819
Gun wad, Budd & Ogden	
Hat sizing or fulling machine, R. Eickemeyer 2	17,783
Hatchway door operating device, G. K. Bancroft. 2	
Hides, machine for treating raw, A. C. Krueger 2	17,803
Hinge and roller, gate, J. B. Bolinger 2	17,674 17,772
Horseshoe toe weight, A. Fischer	
Hot air furnace, W. F. Beecher 2	
Hot air furnace, T. F. Hemmich	17,686 17,723
King bolt, clip, G. E. Kerlicks	17,686 17,723 217,794
	217,686 217,723 217,794 217,691 217,799
Kitchen cabinet, J. R. Kivett	17,686 17,723 17,794 17,691 17,799 17,694
Kitchen cabinet, J. R. Kivett       2         Lamp, electric. J. C. Porter       2         Lamp extinguisher, C. B. Pedlar       2	17,686 17,723 17,794 17,691 17,799 17,694 17,744 17,744
Kitchen cabinet, J. R. Kivett       2         Lamp, electric. J. C. Porter       2         Lamp extinguisher, C. B. Pedlar       3         Lamp, miner's, J. H. Gable       2	17,686 17,723 17,794 17,691 17,799 17,694 17,744 17,744 17,816
Kitchen cabinet, J. R. Kivett       2         Lamp, electric, J. C. Porter       2         Lamp extinguisher, C. B. Pedlar       2         Lamp, miner's, J. H. Gable       2         Lap table, work box, and work stand, M. Byrkit       2         Latch, E. A. Kimball       2	17,686 17,723 17,794 17,691 17,799 17,694 17,744 17,746 17,791 17,679 17,693
Kitchen cabinet, J. R. Kivett       2         Lamp, electric. J. C. Porter       2         Lamp extinguisher, C. B. Pedlar       2         Lamp, miner's, J. H. Gable       2         Lap table, work box, and work stand, M. Byrkit       2         Latch, E. A. Kimball       2         Letter box, H. R. Robbins       2	217,686 217,723 217,794 217,691 217,699 217,694 217,744 217,816 217,791 217,679 217,693 217,693
Kitchen cabinet, J. R. Kivett       2         Lamp, electric. J. C. Porter       2         Lamp extinguisher, C. B. Pedlar       2         Lamp, miner's, J. H. Gable       2         Lap table, work box, and work stand, M. Byrkit       2         Latch, E. A. Kimball       2         Letter box, H. R. Robbins       2         Liniment, J. Mayer       2         Mash, machine for mashing and mixing brewer's,	217,686 217,723 217,794 217,691 217,694 217,694 217,816 217,744 217,816 217,791 217,693 217,693 217,820 217,808
Kitchen cabinet, J. R. Kivett       2         Lamp, electric. J. C. Porter       2         Lamp extinguisher, C. B. Pedlar       2         Lamp, miner's, J. H. Gable       2         Lap table, work box, and work stand, M. Byrkit       2         Latch, E. A. Kimball       2         Letter box, H. R. Robbins       2         Liniment, J. Mayer       2	17,686 17,723 17,794 17,691 17,799 17,694 17,744 17,816 17,791 17,679 17,693 17,820 17,808

_	<i>O</i> 4 4 4 4 4	~ ~ ~
	Monkey wrench, B. W. Lloyd	917 607
,	Mop head, W. H. Thayer	
f	Mop wringer, W. Boswell.	
	Mop wringer, W. H. Thayer	
e	Musical instrument, mechan., Kelly & Matthews.	
ď	Oatmeal machine, S. F. Butts	
	Ore and rock crusher, T. R. Timby	
_	Ore washer, E. Bazin	
	Organ reed, C. N. Rand	
	Paper box machine, P. Cook	
	Paper cutting shears, C. Brombacher (r)	
	Paper fastener, G. B. Thayer	
_	Paper for wrappers for cigars, etc., preparing,	•
-	J. W. Bolles	217.767
	Pianofortes, device for leveling the key frames	•
	of, C. F. T. Steinway	217,828
	Planter, corn, L. J. Corbin	217,777
	Planters, check row attach. to seed, G. S. Simpson	217,751
	Plow, C. O. Wilder	217,759
ь .	Pocket flask and drinking cup, F. Knoblauch	217,695
٠.	Printing machine for paper hangings, J.J. Janeway	217,735
	Projectile, A. L. Varney	217,756
	Pyrometer, A. H. Seyferth	21~,822
	Rail and telegraph conductor, P Bargion	217.766
	Railway chair, J. Wodiska	217,718
•	Railway track, portable, J. Turl	217,755
i	Railway water tanks, watering column for, J. N.	-
]	Poage	217,817
5	Reamer for deep wells, C. A. Mentry	217,740
8	Rein supporter, C. T. Grilley	217,688
1	Saccharine and other liquids, apparatus for con-	
9	centrating and crystallizing, Monsanto & Gan-	
7	non	217,702
,	Salt, process and apparatus for the manufacture	

e	Pocket flask and drinking cup, F. Knoblauch 217,695	
	Printing machine for paper hangings, J.J. Janeway 217,735	
	Projectile, A. L. Varney 217.756	
	Pyrometer, A. H. Seyferth 21" 899	
	Rall and telegraph conductor, P Bargion 217 766	
	Railway chair, J. Wodiska	
•	Railway track, portable, J. Turl 217,755	
	Railway water tanks, watering column for, J. N.	
-	Poage	
5	Reamer for deep wells, C. A. Mentry	
8	Rein supporter, C. T. Grilley	
4	Saccharine and other liquids, apparatus for con-	
9	centrating and crystallizing, Monsanto & Gan-	
7	non	
0	Salt, process and apparatus for the manufacture	
8	of, W. W. Elmer	
6	Sash lock, H. T. Racke	
1	Sash supporter, G, W. Shaw	
9	Saw cleaner, cotton gin, R. S. Munger 217,813	
5	Saw, drag, D. Heller (r)	
3	Sawing machine, drag, W. Dyke	J
6	Sewer trap attachment, W. Wilson	i
9	Sheet metal shaping machinery, E. W. Bliss 217,725	
S	Shingles, packing, R. B. & H. H. Russell	
3	Slate, artificial, D. M. Steward	i
l	Station indicator, C. G. Damaschky	
7	Steam utilizer, exhaust, N. W. Ericson	
ı	Steam boiler circulating tube, Sherlock & Booth 217,710	i
l	Still, M. M. Monsanto	İ
3	Stove base, J. M. Harper	
3	Stove grate, O. E. Lake	
	Stove pipe, extension, R. R. Pattison	
7 '	Stove, hot blast, Cochrane & Cowper (r) 8,814	
)	Street sprinkler, M. W. Binga	
i	Suspender end binding, J. B. Sharp 217,823	
6	Suspenders, T. O. Potter (r)	
3	Table and music stand, J. Kayser 217,796	
3	Tablet, lettering, H. W. Kibbe 217.736	
;	Tablet, picture, C. E. Kellogg	
· í	Tally, grain, W. P. Sheets	
1	Telegraph, duplex, T. A. Edison 217,782	
1	Telegraph, sextuplex, T. A. Edison 217,781	
ij	Telephone, carbon, G. D. Clarke 217,773	
i	Telephone, mechanical, M. L. Hoover 217.690	
	Thill coupling, J. H. Brodie 217,771	
'n	Thill coupling, J. Lauth 217.696	
1	Ticket, passenger, J. N. Stinson 217,753	
ļ	Tobacco hook, T. Wood, Jr 217,719	
i	Traction engine, F. L. Fairchild 217,787	
i	Valve, globe, F. Haskell 217,847	
	Valve, safety, Pringle & Robb	
1	Vehicle seat fastening, J. Foster 217.790	
ĺ	Ventilator, J. Smith	
-	Wagon brake, O. A. Kenyon (r) 8,817	
į	Wagon jack, M. D. Adams 217,669	
İ	Wagon, road, C. W. Saladee 217,708	
ĺ	Wagon, side bar, W. & C. R. Fenstermacher 217,734	
	Wardrobe L. S Dewing 217 699	

TRADE MARKS.
Blind awning fixtures, C. P. Dearborn
Carriage springs, The A. A. Dart Company 7,543
Chewing and smoking tobacco and cigarettes, Mayo
& Watson
Chewing and smoking tobacco and cigars, J. M.
Bobbitt
Cigars, Oliver & Robinson
Cigars, cigarettes, and smoking tobacco, M. Jacoby
& Co
Cigars, cigarettes, chewing, smoking, granulated,
and plug tobacco. and snuff, G.W.Van Slyke & Co 7,535
Cigarettes and chewing and smoking tobacco, P. L.
Chambers 7,545
Dietetic cocoa, H. Maillard 7,528
Dry hop yeast, W. H. Coucher et al 7,523
Fine cut chewing, smoking, and plug tobacco, C. B.
Hull
Fire brick, Newton & Co
Galvanic batteries, H. L. Roosevelt
Grain separators, cleaners, and baggers, The Geiser
Manufacturing Company 7,546
Ground and crushed pop corn, Maynard & Wichel-
man 7,527

Phosphatic preparation, G. L. Austin & Co......... 7,542 Pills, J. V. Stehl...
Plows, A. Speer & Sons .....

 Soap, J. H. Friday
 7,521

 Spices, H. F. A. Pinckney & Co.
 7,530

 Stove polish, J. L. Prescott
 7,534

 Toilet and other brushes, F. Loonen & Son
 7,522

 Wagdrobe, L. S. Dewing.
 217,882

 Wash boiler, Z. McKinley
 217,810

 Washing machine, D. Kunkel, Sr.
 217,737

 Washing machine, T. E. Matthews
 217,700

 Washing machine, N. A. Stromquist
 217,710

 Wasning machine, N. A. Stromquist.
 217,718

 Water cooler, F. R. Lewis.
 217,738

 Water lifter, A. Collie.
 217,775

 Windmill, P. Bergman
 217,724

 Window ventilator, bulk, M. Eckstein
 217,732

 Wire colling machine, W. F. Moody
 217,704

 Yarn, machine for winding, J. T. & A. Boyd
 217,769

•	
DESIGNS.	
Carpet, G. W. Piggott	11,304
Carpet pattern, A. Heald	
Door handle and plate, G. S. Barkentin	11,299
Funeral ornaments, C. H. Learned	11,303
Game counters, T. Miner	11,302
Oil cloth, C. T. & V. E. Meyer	11.301

#### English Patents Issued to Americans.

From July 25 to July 29, inclusive. Matches, shipping package for, O. C. Barber 217,765
Meats, preserving, J. M. Dillon 217,779
Dental chair, J. C. White, Philadelphia, Pa.
Dummy figure, J. A. Gillotte, New York city. 

# The Scientific American EXPORT EDITION.

#### PUBLISHED MONTHLY.

THE SCIENTIFIC AMERICAN Export Edition is a large and SPLENDID PERIODICAL, issued once a month, forming a complete and interesting Monthly Record of all Progress in Science and the Useful Arts throughout the World. Each number contains about ONE HUNDRED LARGE QUARTO PAGES, profusely illustrated, embracing:

(1.) Most of the plates and pages of the four preceding weekly issues of the Scientific American, with its SPLENDID ENGRAVINGS AND VALUABLE INFORMATION.

(2.) Prices Current, Commercial, Trade. and Manufacturing Announcements of Leading Houses. In the Connection with these Announcements many of the Principal Articles of American Manufacture are exhibited to the eye of the reader by means of SPLENDID ENGRAVINGS.

This is by far the most satisfactory and superior Export Journal ever brought before the public.

Terms for Export Edition, FIVE DOLLARS A YEAR. Sent prepaid to any part of the world. Single copies, 50 cents. For sale at this office. To be had at al, News and Book Stores throughout the country.

#### NOW READY.

THE SCIENTIFIC AMERICAN EXPORT EDITION FOR AUGUST, 1879, ILLUSTRATED WITH ONE HUNDRED AND SIXTEEN ENGRAVINGS.

#### GENERAL TABLE OF CONTENTS

Of the Scientific American Export Edition for August, 1879.

August, 1879.

1.—INVENTIONS, DISCOVERIES, AND PATENTS. The Spar Torpedo Vessel Acheron. 12 engravings. New Bubble Blower. 1 engraving. Portable Mill. 1 engraving. Fork and Spoon Combined. 1 engraving. Recent Mechanical Inventions. Dr. Cresson's Megascope.

The Polar Pantograph. 1 engraving.
Improved Potato Digger. 1 engraving.
New Thrashing Machine. 1 engraving.
Patents, Recent Decisions. Edison's Dynamometer.
Compass Electrical Alarm.
Improved Grinding Mill. 3 engravings.
New Agricultural Inventions.
Engineering Inventions.
Engineering Inventions.
Improved Rut Lock 4 engravings.
Relating to Patent Decisions.
Improved Pressing Machine. 3 engravings.
New Railroad Tle. 4 engravings.
New Railroad Tle. 4 engravings.
Improved Churn. 1 engraving.
New Uttoff. 1 engraving.
New Electric Current Regulator. 1 engraving.
New Magnetometer. 2 engravings.
New Process of Phototypie.
New Process of Phototypie.
New Piston Rod Packing
Combined Sad Iron and Fluting Roller. 2 engravings.
Hollway's Metallurgical Process.
Improved Pressing Engineering.
The Holly Steam Heating System. 5 engravings.
Improved Steam Whistle. 2 engravings.
Improved Steam Whistle. 2 engravings.
Wire Covering Machine. 1 engraving. 1.—INVENTIONS, DISCOVERIES, AND PATENTS.

#### II.—MECHANICS AND ENGINEERING.

II.—MECHANICS AND ENGINEED
To Propel Boats.
Scrength of Boiler.
Future of American Engineering.
Power of an Engine.
Governors.
Strength of Ropes.
Machine Threads on Taps.
Dynamo electric Machine.
Repair of the Easton Bridge.
San Francisco's Big Ferry Boat.
New Great Gun.
Small Steamer. Small Steamer.
Small Stern Wheel Steamer.
Amateur Mechanics—Metal Spinning.
Great Alpine Tunnel.
Suspension Bridge.
Canal Mowing Machine Wanted.
Freaks of Feed Pump.
Holes in Hard Steel.
Horse Power Rent.
Consumption of Smoke.
Small Steamboat.
Steam Catamaran.
Small Side-wheel Steamer.
Fortifying the Treasury.
Ring Spinning.
Boiler Explosions.
Small Boiler.
Discharge for Fountain. 1 engraving.
1,500 Horse Power Hoister.
Railway Bridge for Niagara River.
European Railway Speeds.
A Runaway Railway Wheel.
Steam Launch.
The Cycloscope. 1 engraving.
The Thunderer's Gun. 1 engraving.
Relative Economy in Steam and Gas Engines.
Fireproof Partitions.
Strength of Wires.
Nuts.

III. MINING AND METALLURGY. Small Steamer. Small Stern Wheel Steamer

#### III. MINING AND METALLURGY.

III. MINING AND METALLURGY.
Fusible Metals.
Natural Soap Mine.
Casting Bronze in Wax.
Anthracite Coal. Effect of Exposure.
To Amalgamate Copper.
Imitation Gold and Silver.
To Extract Gold.
Explosion of Dynamite.

IV.-CHEMISTRY AND PHYSICS.

IV.—CHEMISTRY AND PHYSICS.

Astronomical Notes.
Electric Blowpipe.
Where to Study Chemistry in Germany.
Lime Water.
Lifetime of a Locomotive.
Reflecting Magic Lantern in Court.
Progress in Spectroscopy.
The Sun as a Source of Power. 3 engravings.
'lelegraph Ignition.
Hard vs. Soft Water.
Probable Opportunities for New Discoveries in Acoustics.
Proportion of Air Chamber.
Assays.
Cheap Battery.
Dice Magnetism.
Induction Coil.
Induction Coil for Telephones.
Lightning Arrester. 1 engraving,
Longitude of the United States.
New Optical Delusion. 3 engravings.
Spring Phonograph.
Miss Hedley's Photographs—Spirit Photographs.
Changes in Photography.
Plumb and Perpendicular.
Inductive Action of Lightning.
Locating Lightning Rods.
Petroleum.
Photographic Patterns.
Carbon Photo-Printing,

The Meridian Circle. 1 engraving.
Swift's Comet of 1879. 2 engravings.
Negatives on Paper.
The New Optical Fielusion. 8 engravings.
The Optical Delusion—An Explanation, 2 engrav-The Optical Delusion—An Explanation, 26 ings.
The Aurora.
A New Map of the Solar Spectrum.
A Difficult Swim.
The August Meteors.
Adaptation of Electricity to Useful Purposes.
The Colors of Doubl Stars.
Electro-motive Force in Batteries.
Telegraph Lines.
Magnifying Power of Microscopes.
A Little Paradox.

V.-NATURAL HISTORY, NATURE, MAN, &c.

Alexis St. Martin.
Curious Facts about Ants.
Filaria Snake.
Progress in Fish Culture.
Natural History Notes.
Oaks and Pines.
The Phylloxera in France.
Great Tornadoes Oaks and Pines.
The Phylloxera in France.
Great Tornadoes
Tornelise. 1 engraving.
An Aged Turtle.
A Finback Whale in New York Harbor.
Fossil Footprints in Anthracite.
Intellect in Brutes.
A Deaf-Mute Cow.
Smithsonian Institute uriosities.
Luray Cave Geological Specimens.
Use of the Hop Plant.
Ishmail Pasha.
A Meteorite in Iowa.
The Narica. 1 engraving.
Parrot Speech.
Ocean Currents at St. Paul's Rocks.
Traveling Itocks.
Baby Sea Lion.
Thomas vs. Dale.
White Africans.
Freezing Fish for Winter Use.
Pearl Fisheries of Ohio.
A Boy's Promptness and Courage.
Sun Dance of the Fioux.
Chemistry and Physiology of Aquaria.
The Insect Enemies of Books.
The Coal Crop.
VI.—MEDICINE AND HYGIENE. VI.—MEDICINE AND HYGIENE.

VI.—MEDICINE AND HYGIENE.
Intravenous Injection of Ammonia.
Alleged Cure for Rattlesnake Bite.
The Ammonia Bath.
Fish Food.
Hygienic Effects of Air.
Jelly and Jam.
A Sanitary Captain Eads Wanted.
House Drainage.
Havana the Pest-Breeding Place.
To Attain Long Life.
Stille on Yellow Fever.
Arsenic in Water Colors.
Relief of Color Blindness.
A Fall of 260 Feet.
Relative Value of Home-made and Bakers' Bread.
Fallacy of Refrigerating Ships for the Destruction of
Yellow Fever Germs.
VII.—SCIENTIFIC MEETINGS, EXHIBITIONS, ETC.
Cincinnati Industrial Exhibition.

VII.—SCIENTIFIC MEETINGS, EXHI
Cincinnati Industrial Exhibition.
U. S. Fish Commission.
The New Bureau of National Survey.
American Institute Exhibition.
American Association
American Association
American Association.
The Australian Exhibition.
Toronto Exhibition.
Toronto Exhibition.
International Fishery Exhibition.
Nordenskjold's Expedition.
The Worcester Free Institute.
VIII —INDISTRY AND COMMERCE VIII.-INDUSTRY AND COMMERCE.

Nordensijon's Expedition.

The Worcester Free Institute.

VIII.—INDUSTRY AND COMMERCE.

Shall We Have a Canal or Ship Railway?
California Cod Fish Trade.
Diploma of Paris Exhibition. 1 engraving.
Opening of the Mississippi.
Activity not energy.
After Graduating—What?
American Competition.
Bank of England Notes.
The Darien Canal.
Machine Made Horsenails.
How to Print Letters.
Names of Nails.
Brooklyn Navy Yard.
Pluck and Industry.
Signs of Prosperous Times.
Rocky Mountain Railways.
Manufacture of Damascus Steel.
Future of Texas.
Chinese Tile Factory.
Manufacture of Damascus Steel,
Future of Texas.
Chinese Tile Factory.
Manufacture of Damascus Steel.
Scientific American in Italy.
A Large Smelting Contract.
St. Petersburg as a Seaport.
The Systeme Sebillot.
Trade in Time Pieces.
Value of a Trade Mark.
Lining for Petroleum Tank.
Overland Boating.
Labor at home and abroad.
Manufacture of Bessemer Steel. 2 engravings.
A Big Jam of Logs Broken.
The First Steam Ferry Boat Between New York and
Jersey City.
Is it Paying?
Economical Use of Coal.
The Cost of Living.
A Better Butter Package Wanted.
Who will Can Cream?
Balance of Trade in Men.
New Documents Relating to the Discovery of America.
Shoe Industry.
A Rapid Voyage.
IX.—PRACTICAL RECIPES AND MISCELLANEOUS.
Notes and Queries.

A Rapid voyage.

IX.—PRACTICAL RECIPES AND MISCELLANEOUS.
Notes and Queries.
How to Preserve Cider.
TO Color White Clay.
TO Make a Small Still.
Boiler Preparation.
To Preserve Cedar Posts.
A Home Made Dentiell.

A Home Made Daniell.
The Devil's Darning Needle.
Ink for Greased Leather.
Gold Beater's Skin. Gold Beater's Skin.
Razor Strops.
Hard Soap.
Browning's Stone Varnish.
To Cut Stoneware.
Supervision.
How to Make a Bark Lodge.

Answers to Correspondents, embodying a large quantity of valuable information, practical recipes, and instructions in various arts.

Single numbers of the Scientific American Export Edition, 50 cents. To be had at this office and at all news stores. Subscriptions, Five Dollars a Year; sent postpaid to all parts of the world.

MUNN & CO., Publishers, 37 Park Row, New York. To Advertisers: To Manufacturers and others who desire to secure foreign trade may have large and handsomely displayed announcements published in this edition at a very moderate cost.

The Scientific American Export Edition has a large guaranteed circulation in all commercial places throughout the world. Regular Files of the Export Edition are also carried on ALL STEAMSHIPS, foreign and coastwise, leaving the port of New York. Address MUNN & CO., 37 Park Row, New York.

Advertisements.

Inside Page, each insertion --- 75 cents a line. Back Page, each insertion --- \$1.00 a line. (About eight words to a line). Engravings may head advertisements at the same rate per ime, by measuremert, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

# Valuable Practical SCIENTIFIC BOOKS.

The Railway Builder. A Hand Book for Estimating the Probable Cost of American Railway Construction and Equipment. By W. J. Nichols. Illustrated. Pocket Book form. By W. J. Steet Iron, Copper, and Tin Plate Workers, etc. By Reuben H. Warn: Illustrated by 32 plates and 37 wood-cuts. Svo. \$3.00

The Practical Brass and Iron Founder's Guide. By Jas. Larkins. 12mo, \$2.25

The Practical Hetal Worker's Assistant. By Oliver Byrne. With over 600 engravings. 8vo. \$7.00

The Practical Workshop Companion, for Tin, Sheet Iron. and Copper Plate Workers. By L. J. Blinn. With over 100 illustrations. 12mo,

The Moulder and Founder's Pocket Guide. Fifth edition. By Frederick Overman. 12mo, \$1.50

Practical Guide for the Manufacture of Metallic Alloys. By A. Guettier. 12mo. \$3.00

The Complete Practical Machinist. By Joshua Rose. With 130 illustrations, and 376 pages. 12 mo.

The Practical Braughtsman's Book of Indeserted and the second control of the second

Rose. With 130 illustrations, and 376 pages. 12
mo,
The Practical Draughtsman's Book of Industrial Designs, and Machinist's and Engineer's
Drawing Companion. With 50 folio Steel Plates
and numerous Wood-cuts. Inivol. Quarto. \$10 00
The Principles of Mechanism and Machinery
of Transmission. By Wm. Fairbairn, C.E. Illustrated by over 150 wood-cuts. 12mo,
The Modern Practice of American Machinists
and Engineers. By Egbert P. Watson. Illustrated
by 86 engravings. 12mo, \$250

The above or any of our Books sent bymail, free of postage, at the publication price. Our new and enlarged CATLOGUE OF PRACTICAL AND SCIENTIFIC BOOKS-96 pages, 8vo—sent free to any one who will furnish his address.

HENRY CAREY BAIRD & CO., Industrial Publishers, Booksellers, and Importers, 810 Walnut Street, Philadelphia.



IRON SCREW WIND POWER,
With Corrugated fron Fans.
The only Windmill using a propellershaped wheel, by means of which the
sail does its proportion of work at
every point. Has an open center, is
Vaneless, Stormproof, and Self-gyerning. The motion is AlWAYS
SYEADY, the speed being governed by
the lever rod, and the mill does not
stop or run any faster, no matter
what the gale is. Send for catalogue and full particulars. Address
POWELL & DOUGLASS, Wankegan, Ill.

HOW TO REMOVE STAINS AND SPOTS HOW TO REMOVE STAINS AND SPOTS from Linen, Cotton, Woolens, and Silk. Being a Table of Specific Directions, showing how to proceed in removing from each of the above kinds of goods any stains of the following character, to wit: Stains of Sugar, Glue, Blood, Albumen, Grease, Varnish, Oil, Paints, Stearine, Vegetable Colors, Red Wine, Fruit Stains, Red Ink, Alizarine Ink, Iron Rust, Ink made with Galls, Lime, Lye, Alkali Stains, Tannin, Green Nut Stains, Coal Tar Stains, Wagon Grease, Acid Stains, etc. By means of this valuable table of directions any person, by providing himself with a few simple chemicals, and using them as directed, may readily clean any species of the above goods, and if necessary set up a cleaning shop. This is one of the most convenient and valuable papers on the subject ever published. Contained in Scientific and of all newsdealers.

CIVIL AND MECHANICAL ENGINEERING at the Reusselner Polytechnic Institute, Troy, N. Y. The oldest engineering school in America. Next term begins Sept. 18. The register for 1879 contains a list of the graduates for the past 53 years, with their positions; also, course of study, requirements, expenses, etc. Address W.M. H. YOUNG, Treas.



RAPID ADDITION! Wonderful Invention!

A RT of Adding Figures
from Left to Right;
or from Middle either way;
or six columns at one time!
Done as Quick as Thought!
Sent to any address on receipt of Price, 50 Cents in
postage stamps. postage stamps. W. F. MERRIMAN, Batavia, N. Y.

I CHALLENGE THE WORLD to produce an ointment that will cure more ills than the Golden Healing (intment manufactured by J. L. Beattie. Patent rights for sale or lease by C. J. BEATTIE, of Pueblo, Colo.

### THE DRIVEN WELL.

Town and County privileges for making Driven Wells and selling Licenses under the established American Driven Well Patent, leased by the year to responsible parties, by

WM. D. ANDREWS & BRO., 235 BROADWAY, NEW YORK.



The attention of Architects, Engineers, and Builders is called to the great decline in prices of wrought STRUCTURAL IRON.


It is believed that, were owners fully aware of the small difference in cost which now exists between iron and wood, the former, in many cases, would be adopted, thereby saving insurance and avoiding all risk of interruption to business in consequence of fire. Book of detailed information furnished on application.

WANTED—THE ADDRESS OF MANUFACTURERS of friction clutches. Address WASHINGTON ICE CO., 79 Clark Street, Chicago, Ill.



PHILADELPHY

THIS WORK IS VERY RELIABLE. AND IS STRONGLY RECOMMENDED BY THIS PAPER. It is undoubtedly the cheapest work of the kind ever published. The author has covered very extensive ground, and the recipes and instructions are carried down to the latest date. The WELL KNOWN NAME AND REPUTATION OF THE AUTHOR IS A SUFFICIENT GUARANTEE OFITS VALUE. OFITS VALUE.



Allen's Useful Companion, THE KING OF BOOKS!

SIZE, 8½ X 6 INCHES; CONTAINS MORE
THAN 700 LARGE, CLOSELY PRINTED PAGES;
HUNDREDS OF ILLUSTRATIONS AND DIAHUNDREDS OF ILLUSTRATIONS AND DIAGRAMS; THOUSANDS UPON THOUSANDS
OF NEW, RARE, AND VALUABLE FORMULAS, RECIPES, TRADE SECRETS, MATHEMATICAL CALCULATIONS, TABLES, BUSIEVERY TRADE, PROFESSION, AND OCCUPATION IN CHRISTENDOM, and is a COMPLETE GUIDE IN ALL BRANCHES OF MECHANICAL INDUSTRY, with a Copious Index of 62 columns.

Fine English Cloth Binding, Handsome Gilt Back...\$2.50 Fine English Leather Binding, Library Edition.... 3.00

WILL BE SENT BY MAIL, POSTAGE PAID, TO ANY PART OF THE WORLD, on receipt of the price. AGENTS WANTED EVERYWHERE. LIBERAL COMMISSIONS PAID. H. B. ALLEN & CO., Publishers, 59 Murray St., New York.

# PATENTS at AUCTION.

Regular Monthly Sales. For terms, address N. Y PATENT EXCHANGE, 67 Liberty Street, New York.

THE

# **HANCOCK INSPIRATOR**

## Full Report.

"Park Benjamin's Scientific Expert Office"

have recently made a series of tests of the Hancock Inspirator, a full report of which is published in "Apple ton's Cyclopedia of Applied Mechanics," Part No. 18, showing the rangelift, temperature of feed and delivery water, and much other interesting information. Send for a copy of report to the

HANCOCK INSPIRATOR CO.. 52 CENTRAL WHARF,

BOSTON, MASS.

NEW YORK BELTING AND PACKING COMP'Y.



VENUS, THE EVENING STAR. AN interesting and valuable paper. By Camille Flammarion. Containing a resumé in popular form, of the Latest Knowledge concerning this wonderful planet, which is nearly of the same size as the earth and only twenty-six millions of miles distant from us. Including an account of the phases of Venus, its remarkable brilliancy, periods when seen in the daytime, its density, probable atmosphere, climate, physical features, deafuctions concerning Life and inhabitants, etc., with one illustration. Contained in SCIENTIFIC AMERICAN SUPPLEMENT NO. 177. Price 10 cents. To be had at this office and of all newsdealers. The same number also contains a valuable paper by Alfred M. Mayer, on the Measurements of the Waves of Light, with a drawing and description of the mode of using the Spectrometer.



**Bellefonte** Water Wheel

Send for circular.

W.P.Duncan&Co., Bellefonte, Pa.

Deoxidized Bronze (Patent), supe-Tior to Phosphor-Bronze or any alloy of Copper and Tin made by any other process. The best thing for machine and engine journals and any purpose requiring a first-class ironze Metal. Tough, hard, homogneous, and of splendid anti-friction quality. Reference to some of the largest machinists and steel works. Electro-Bronzing on Iron. (New Patent.) Indestructible and unchanging by atmospheric action. structions and unchanging by atmospheric action Use of these patent rights can be obtained on favouable terms.

PHILA. SMELTING CO., Phila., Pa.

FORCE OF WIND. HOW TO ESTIMATE the Necesary Strength of Boofs, Towers, Tall Chinneys, etc., to withstand the Wind. The Solution of all Problems of the kind, with numerous Formula. Contained in SCIENTIFIC AMERICAN SUPPLEMENT NO. 109. Price 10 cents. To be had at this office and of all newsdealers.



EXETER MACHINE WORKS, Manufacturers of Steam Engines, Blowers, and Steam Heating Apparatus.
50 Federal St., Boston, Mass.

THE SILVER MILL.—BY M. P. BOSS. A valuable Practical Paper, giving descriptions and details of the Best Machinery and Methods now in practice in the United States for the Reduction of Silver Ores. With 7 figures. Particulars of the Quicksilver Pump and Pressure Systems. Best Policy in Milling, Crushing and Grinding, fine vs. coarse Grinding. The Best Crushers in Use. The Most Economic Wear of Stamps. The Amalgamating Pan, the Muller and the Driver, etc. How to Save Time and Labor by Babbitting the Shaft. The Pulp Currents; Angle of Draught for Shoes and Dies; Speed of Pans. The two kinds of Settlers, and their best adaptations. Concentrators and Agitators. "Sand Sluices," and How to Make, Use of Blankets in, and best Grade. Handling of Quicksilver, with Elevations, Plans, and theorough Description of the Pump and Pressure Systems, and their Working in several Mills. Best Retorts, with Dimensions. Plans for Scouring Amalgam, etc. Properties of Quicksilver, Gold. Silver. Copper, Cast Iron, and Lead. Value of Gold and Silver by the ounce, the pound, the cubic foot, and the ton. Useful Formulæ and Tables for estimating Weight of Iron. Copper, etc.; the Tensile Strength of Rods and of Ropes; Pressure of Columns of Water, etc.; Compating ordinary Geometrical Figures; and Recipes for Quicksetting Rust Joint, Cement, Taper for Keys for Shaffing, etc. Contained in Sciextific American Supplement. THE SILVER MILL.—BY M. P. BOSS.



LIGHT DRAUGHT, FAST, STERN Wheel, Steam Yachts. These yachts are 24 feet long, 8 feet 2 inches beam; draught, 16 inches; speed, 7 miles an hour. Designed under direction of Col. F. W. Farquhar, U. S. A., by M. Meigs, U. S. Civil Engineer, U. S. Works, Rock Island, Ill. With working drawings, dimensions, and particulars of vessel, engine, boiler, and wheel, furnished by the author. The serviceable character of these boats, their simplicity of construction, roominess, and light draught render them very desirable, especially for shallow waters. Contained in SCIENTIFIC AMERICAN SUPPLEMENT No. 179. Price 10 cents. To be had at this office and of all newsdealers. LIGHT DRAUGHT, FAST, STERN



BLAKE'S STONE AND ORE BREAKER AND CRUSHER.

For breaking hard and brittle substances to any size. Endorsed by the leading Mining,

Manufacturing, and Railroad corporations in the United States and Foreign Countries. Manufacturing, and Railroad corporations in the United States and Foreign Count First Premium wherever exhibited, and hundreds of testimonials of the highest character Indispensable for making best Moldem Poods Revenue. Indispensable for making best McAdam Roads, Ballasting of Railroads, Crushing the hardest Ores, Stone for Concrete, etc., etc. Prices greatly reduced.

Address BLAKE CRUSHER CO., New Haven, Conn.

# FOR SECOND-HAND ENGINES,

ICE AND ICE-HOUSES—HOW TO MAKE ice ponds; amount of ice required, etc., and full directions for building ice-house, with illustrated plan. SUPPLEMENT 55. Price 10 cents.

PHOSPHOR-BRONZE BEARINGS, PUMP-RODS,



THE PHOSPHOR-BRONZE SMELTING CO 2038 Washington Ave., Philadelphia, Pa. THE FOSSIL FORESTS OF THE YEL

THE FOSSIL FORESTS OF THE YELLOWSTONE NATIONAL PARK. By W. H. Holmes. A very interesting and valuable paper descriptive of the remarkable "Volcanic Tertiary" formations of the above region, 5,500 feet in thickness. Illustrated by an engraving of the north face of Amethyst mountain, 9,400 ft. high, the river bed 6,700 ft. high, showing the position of the multitudes of ancient forest tree trunks of gigantic size turned into stone and now standing on the cliffs, together with many other interesting geological particulars. Contained in SCIENTIFIC AMERICAN SUPPLEMENT, No. 180. Price 10 cents. To be had at this office and of all newsdealers.



THE FORSTER-FIR-MIN GOLD AND SILVER
AMALGAMATING COMP'Y
of Norristown, Pa., will grant
state rights or licenses en
easy terms. This system
works up to assay, and recovers the mercury rapidly.
Apply as above.

Pond's Tools, Engine Lathes, Planers, Drills, &c.
DAVID W. POND, Worcester, Mass.

STEAM FOR SMALL BOATS.—REports of Trials of Steam Yachts, giving description of engine, and screw, and other valuable facts. With Engravings. Contained in SCIENTIFIC AMERICAN SUPPLEMENT 15.5. Price 10 cents. To be had at this office and of all newsdealers.



Paris, . , 1878 Australia,1877

Phila., . . 1876 Santiago, 1875

Vienna, . 1873

## J. A. FAY & CO'S WOOD WORKING MACHINERY

ect in Wörkmanship, Saves lab conomizes lumber, and Increases products of the highest stand-ard of Excellence.

Railroad, Furniture, and Agricultural Implement Shops, Planing Mills, etc., equipped at short notice, and the lowest cash prices. Send for Circulars.

J. A. FAY & CO., Cincinnati, Ohio, U. S. A.

# PATENT OLD ROLL

The fact that this shafting has 75 per cent. greater trength, a finer finish, and is truer to gauge, than any therin use renders it undoubtedly the most economical. Ve are also the sole manufacturers of the CELEBRATE OLLINS' PAT.COUPLING, and turnish Pullevs. Hangers to of the court of the other in use renders it undoubtedly the most economica We are also the sole manufacturers of the CELEMPATE COLLINS' PAT. COUPLING, and turnish Pulleys, Hanger etc., of the most approved styles. Price list mailed or application to the street, 2d and 3d Avenues, Pittsburgh, Pa. 190 S. canal Street, 2d and 3d Avenues, Pittsburgh, Pa. 190 S. canal Street, Chicago, Ill., and Milwaukee. Wis.

FULLER, DANA & FITZ, Boston, Mass, Geo. Place Machinery Agency, 121 Chambers St., N. Y.

Wright's Pat. Bucket Plungers are the best. VALLEY MACHINE Co. Easthampton, Mass.

# STEAM PUMPS.

HENRY R. WORTHINGTON,

239 Broadway, N. Y. 83 Water St., Boston.

THE WORTHINGTON DUPLEX PUMPING ENGINES FOR WATER WORKS—Compound, Condensing or Non-Condensing. Used in over 100 Water-Works Stations.

STEAM PUMPS—Duplex and Single Cylinder.

## Price list issued Jan. 1, 1879, with a reduction exceeding 30 per cent.



\$50 Screw Cutting Foot Lathe. Foot and Power Lathes, Drill Presses, Scrolls, Circular and Band Saws, Saw Attachments, Chucks, Mandrels, Twist Drills, Dogs, Calipers, etc. Send for catalogue of outfits for amateurs or artisans.

artisans.

H. L. SHEPARD & CO.,
331, 333, 335, & 337 West Front Street,
Cincinnati, Ohio.

 $60~{\rm ^{Cards-20}~Chromo,\,10}$  Motto, 30 Ocean Shells, Snow-flake, etc., Name on, 10c. Clinton Bros. Clinton ville, Ct.

#### SPARE THE CROTON AND SAVE THE COST. Driven or Tube Wells

furnished to large consumers of Croton and Ridgewood Water. WM: D, ANDREWS & BRO., 235Broadway, N.Y., who control the patent for Green's American Driven Well.

SILVERING GLASS.—THE LATEST AND Best Method of Silvering Mirrors and other articles of Glass by Charman's, Siemens', Petitjean's, Draper's, and Lavat's Processes. Supplement 105. Price 10 cents.

# ESTERBROOK'S STEEL PENS.



ading Numbers: 048, 14. 130, 333, 161. FOR SALE BY ALL STATIONERS. THE ESTERBROOK STEEL PEN COMPANY, Works, Camden, N. J. New

CENTENNIAL AND PARIS MEDALS.

Mason's Friction Clutches and Elevators.
"Newand Improved Patterns." 20 per cent. off list.
VOLNEY W MASON & CO., Providence, R. I., U. S. A.

VALVE REFITTING MACHINES.
ALL USERS OF GLOBE VALVES SHOULD HAVE ONE. GRISCOM & CO., POTTSVILLE, PENN.



#### OF THE American Scientific

FOR 1879.

The Most Popular, Scientific Paper in the World.

#### VOLUME XL,—NEW SERIES.

The publishers of the SCIENTIFIC AMERICAN beg to announce that on the Fourth day of January, 1879, a new volume will be commenced. It will continue to be the aim of the publishers to render the contents of the new volume as, or more, attractive and useful than any of its predecessors.

Only \$3.20 a Year including Postage. Weekly. 52 Numbers a Year.

This widely circulated and splendidly illustrated paper is published weekly. Every number contains six-teen pages of useful information, and a large number of original engravings of new inventions and discoveries, representing Engineering Works, Steam Machinery, New Inventions, Novelties in Mechanics, Manufactures, Chemistry, Electricity, Telegraphy, Photography, Architecture, Agriculture, Horticulture, Natural History, etc.

All Classes of Readers find in The Scientific American a popular resume of the best scientific information of the day; and it is the aim of the publishers to present it in an attractive form, avoiding as much as possible abstruse terms. To every intelligent mind, this journal affords a constant supply of instructive reading. It is promotive of knowledge and progress in every community where it circulates.

Terms of Subscription.—One copy of The Scientific American will be sent for one year—52 numbers—postage prepaid, to any subscriber in the United States or Canada, on receipt of three dollars and twenty cents by the publishers; six months, \$1.60; three months, \$1.00.

was awarded at the Paris Exposition over all competitors THE GOLD MEDAL OF HONOR. Also high estaward at Phila, Santiago, Australia, and Vienna. It is Original in Design, Simple in Construction, Perfect in Workmanship, Saves labor, Clubs .- One extra copy of The Scientific Ameri-

One copy of THE SCIENTIFIC AMERICAN and one copy of THE SCIENTIFIC AMERICAN SUPPLEMENT will be sent for one year, postage prepaid, to any subscriber in the United States or Canada, on receipt of seven dollars by the publishers.

The safest way to remit is by Postal Order, Draft, or Express. Money carefully placed inside of envelopes securely sealed, and correctly addressed, seldom goes astray, but is at the sender's risk. Address all letters and make all orders, drafts, etc., payable to

#### MUNN & CO., 37 Park Row, New York.

To Foreign Subscribers.-Under the facilities of the Postal Union, the Scientific American is now sent by post Greet from New York, with regularity, to subscribers in Great Britain, India, Australia, and all other British colonies: to France, Austria, Belgium, Germany, Russia, and all other European States; Japan, Brazil, Mexico, and all States of Central and South America. Terms, when sent to foreign countries, Canada excepted, \$4, gold, for Scientific American, 1 year; \$9, gold, for both Scientific American and Supplement for 1 year. This includes postage, which we pay. Remit by postal order or draft to order of Munn & Co., 37 Park Row, New York.

#### Advertisements.

Inside Page, each insertion --- 75 cents a line. Back Page, each insertion --- \$1.00 a line. (About eight words to a line.)

Engravings may head advertisements at the same rate per line, by measurement, as the letter press. Advertisements must be received at publication office as early as Thursday morning to appear in next issue.

# **ROCK DRILLS.** COMPRESSORS, FUSE, BATTERIES, POWDER.



BRADLEY & COMPANY, SYRACUSE, N.Y.

OUTLINES OF CHEMISTRY.—BY HENry M. McIntyre. The following elements are treated
lainly and concisely, with their Atomic Weights,
Formulæ, Tests, Important Compounds, Practical Uses,
etc. Selenium, Tellurium, Phosphorus, Silicon, Boron,
and their Compounds. The Metals: their Classification.
Potassium, Sodium, Lithium, Rubidium, Cæsium, Ammonium, Barium, Strontium, Calcium, and their Compounds. Iron, Chromium, Manganese, Tin, Arsenie,
Antimony, Bismuth, and their compounds. Copper,
Lead, Thallium, Mercury, Silver, Gold, Platinum, Palladium, Rhodium, Ruthenium, Osmium, Iridium, and
heir compounds. Organic Chemistry. Ethyl Alcohol;
Rither; Acetic, Oxalic, Tartaric, and Citric Acids. Glycerin; Saccharine Bodies; Starch; Cellulose. Contained
in SCIENTIFIC AMERICAN SUPPLEMENTS 144, 145,
153, 15S. Price 10 cents each. To be had at this
office and of all newsdealers. OUTLINES OF CHEMISTRY.—BY HEN-



# Mill Stones and Corn Mills

We make Burr Millstones, Portable Mills, Smut Machines, Packers, Mill Picks, Water Wheels, Pulleys, and Gearing, specially adapted to Flour Mills. Send for catalogue. J. T. NOYE & SON, Buffalo, N. Y.

# "The 1876 Injector." Simple, Durable, and Reliable. Requires no special valves. Send for illustrated circular. WM. SELLERS & Co., 1'hila.

# EMPIRE THRESHER MANUFACTURED AT

HAGERSTOWN, MD. THE BESTINTHE WORLD.

SEND FOR CIRCULARS.

Shafts, Pulleys, Hangers, Etc. Full assortment in store for immediate delivery.

WM. SELLERS & CO,,
79 Liberty Street, New York.

BIG PAY to sell our Rubber Printing Stamps. Samples free. Taylor Bros. & Co., Cleveland, O

\$77 a Month and expenses guaranteed to Agents Outfit free. Shaw & Co., Augusta, Maine

# The George Place Machinery Agency

Machinery of Every Description.
121 Chambers and 103 Reade Streets, New York.



ARTESIAN WELLS.—A FULL AND EXhaustive Account of the Present Methods of Boring Artesian Wells; including Statements of the cost of Boring and description of the most Effective Tools for Drilling and Boring, and their Mode of Use by Horse Power in sinking such Wells, Boring Test Holes, etc.; general Directions and Advice for the Location of Artesian Wells; Explorations of the Configuration and Indications of the surrounding Country, Locality Best Adapted for Successful Boring for such Wells; together with accounts of the successful Progress of Artesian Wells in and around San Francisco California, with descriptions of the locations and depths of a large number of such Wells, varying in depth from 100 to 503 feet, and delivering daily from 5,000 to 80,000 gallons of pure water; together with descriptions of a large number of other Artesian Wells in various parts of the Country, their cost, delivery, etc. The whole lilustrated with about 25 engravings. The whole presenting in concise form the most recent and valuable information upon the subject of Artesian Wells and Well Boring that can be found in print. Contained in SCINTFIEC AMERICAN ARTESIAN WELLS.—A FULL AND EXthe subject of Artesian Wells and Well Boring that can be found in print. Contained in SCIENTIFIC AMERICAN SUPPLEMENTS 156, 157, 158, 159, 160. Price 10 cents each; 50 cents for the series. To be had at this office and of all newsdealers.

Liquid Paints, Roofing, Boiler Coverings, H. W. JOHNS M'F'C CO. 87 MAIDEN LANE, N.Y.

CEMENTS. - FORTY VALUABLE RE CEMENTS. — FORTY VALUABLE REcipts for a great variety of cements, applicable to all of the purposes of the Household and Shop, including Rubber Cement, Waterproof Cements, Acquarum Cements, Hydraulic and Battery Cements. Cement for paper boats, for metals, for china and glassware, for leather, rubber, and for cementing leather and rubber to metals, glass, etc. Cements for wood, stone, iron, etc. Recipe for Colored Sealing Wax, for Postage Stamp Mucliage, for Crockery Ware, Cement to resist Petroleum. Japanese Cement. Colgnet Beton Cement. Recipe for Fireproof Paper and Ink. Contained in SCIENTIFIC/AMERICAN SUPPLEMENT 158. Price 10 cents. To be hadatthis office and of all newsdealers.

Park Benjamin's Scientific Expert Office, 37 PARK ROW, NEW YORK. Furnishes Recipes and Information on all Industrial Processes.



Columbia Bicycle.

A practical road machine. The velocipede of 1870 is no more to be compared with the present Bicyclethan aspayined donkey with a blooded horse. Send 3c. stamp for 24-page illus. cat., with full information.

THE POPE M'P'G CO.,
89 Summer Street, Boston, Mass.

SCIENTIFIC AMERICAN SUPPLEMENT Any desired back number of the SCIENTIFIC AMERICAN SUPPLEMENT can be had at this office for 10 cents. May also be had or ordered through booksellers and newsdealers everywhere. MUNN & CO., Publishers, 37 Park Row, New York.

\$10 to \$1000 Invested in Wall St. Stocks makes fortunes every month. Books sent free explaining everything.

Address BAXTER & CO., Bankers, 17 Wall St., N.Y.

WOODWORTH SURFACE PLANERS, \$125. Planers and Matchers, \$350. S. C. HILLS, 78 Chambers Street, New York.

# THE HAGERSTOWN DRILL.



The most reliable and successful Grain Drills in use—can change quantities of seed white in motion—the STANDARR FERTILIZING DRILL of the Middle States, strong, durable, and simple, with our GUM SPINING HOE AND GRASS SEED ATTACHMENT. Manufacturers of the CELEBRATED VICTOR DOUBLE HULLER CLOVER MACHINE the Best in the World. Mamifactured by HAGERSTOWN AGRICULTURAL IMPLEMENT CO., Hagerstown. Md.

#### Wood-Working Machinery,

Such as Woodworth Planing, Tonguing, and Grooving Machines, Daniel's Planers, Richardson's Patent Improved Tenon Machines, Montising, Moulding, and Re-Saw Machines. Eastman's Pat. Miter Machines, and Wood-Working Machinery generally. Manufactured by WITHERBY, RUGG & RICHARDSON, WITHERBY, RUGG & RICHARDSON, WAS Salishway Street, Wassester, Mass 26 Salisbury Street, Worcester, Mass. (Shop formerly occupied by R. BALL & CO.)

IMPORTANT FOR ALL CORPORATIONS AND MANF'G CONCERNS. - Buerk's Watchman's Time Detector, capable of accurately controlling the motion of a watchman or patrolman at the different stations of his beat. Send for circular.

J. E. BUERK, P. O. Box 979, Boston, Mass. Beware of buying infringing Detectors.



# HARTFORD STEAM BOILER

Inspection & Insurance COMPANY.

W.B. FRANKLIN, V. Pres't. J. M. ALLEN, Pres't. J. B. PIERCE, Sec'y.



BRADFORD MILL CO.
Successors to Jas. Roadfand Successors to Jas. Braditors of MANUFACTURERS OF French Buhr Millstones, Portable Corn & Flour Mills, Smut Machines, etc.

Also, dealers in Bolting Cloths and General Mill Furnishings.

Office & Factory, 158 W.2d St. CINCINNATI, O.
J. R. Stewart. Press W. D. J. R. Stewart, Pres. W. R. Dunlap, Sec.

MINING MACHINERY. Engines, Boilers, Pumps, Coal and Ore Jigs, Dust Burning Appliances. Drawings and advice free to customers. Jeanesville Iron Works (J. C. Haydon & Co.). Address HOWELL GREEN, Supt., Jeanesville, Luzerne Co., Pa.

# SHAFTING, PULLEYS, HANGERS, etc. a specialty. Send for Price List to A. & F. BROWN, 57-61 Lewis Street, New York.

WANTED—TO BUY A STEAM SHOVEL, IN GOOD repair, with or without engine and boiler.
BOYER & CORNEAU, 456 Fifth Ave., Chicago, Ill.



DARNES' FOOT POWER MA-CHINERY.

Different machines with which Builders, Cabinet Makers, Wagon Makers, and Jobbers in miscellaneous work can compete as to QUALITY AND PRICE with steam power manufacturing; also Amateurs' supplies.

MACHINES SENT ON TRIAL.

Say where you read this and send for catalogue and prices.

W. F. & JOHN BARNES, Rockford, Winnebago Co., Ill.

GALVANIC BATTERIES.—A NEW AND GALVANIC BATTERIES.—A NEW AND valuable paper. By George M. Hopkins. Containing full instructions and working drawings for the construction of nearly every known form of Battery, and its maintenance. This paper includes all of the principal batteries used for Experiment, Telegraphy, Telephony, Electric Light, running Induction coils, and other purposes. Also, Earth-batteries, Dry and Moist Piles, Simple Batteries, costing only a few cents. Sulphate of Copper, Nitric, Chromic Acid, Quicksilver, Gas, Secondary, and Thermo-electric Batteries are included. It is the most comprehensive paper yet published on the subject. Illustrated with nearly Fifty Engravings. Contained in SCIENTIFIC AVERICAN SUPPLEMENTS 157, 158, 159. Price 10 cents each. To be had at this office and of all newsdealers.

WITH THE "AIR SPACE" IMPROVEMENTS. THE CHALMERS-SPENCE CO., Foot E. 9th St., New York. Sole owners of the Air Space Patents

# Scientific American, Export Edition.

PUBLISHED MONTHLY.

The Scientific American, Export Edition, is a large and splendid periodical, issued once a month, forming a complete and interesting monthly record of all Progress in Science and the Userul Arts throughout the World. Each number contains about one hundred large quarto pages, profusely illustrated, embracing: (1) Most of the plates and pages of the four preceding issues of The SCIENTIFIC AMERICAN, with its splendid engravings and valuable information. Every number has from seventy-five to one hundred new enravings, showing the most recent improvements and advances in Science and the Industrial Arts.

(2.) Prices Current, Commercial, Trade, and Manufaccuring Announcements of Leading Houses. In connection with these Announcements many of the Principal Articles of American Manufacture are exhibited to the eye of the reader by means of splendid engravings; the whole forming an elegantly printed Standard Catalogue, or Permanent Directory, of the Latest and Best American-made Goods, always under the eye of the foreign buyer, constantly influencing his preferences and purchases.

The Scientific American, Export Edition, has

Best American-made Goods, always under the eye of the foreign buyer, constantly influencing his preferences and purchases.

The Scientific American, Export Edition, has a large guaranteed circulation in all the principal Cities and Commercial Centers of the World. It is regularly received and filed for public examination by nearly all U. S. Consuls. Go into almost any American Consulate in any quarter of the globe, and the objects of greatest interest there to be found are the numbers of The SCIENTIFIC AMERICAN. Foreign Merchants, Buyers of Goods, and others are always referred by the Consular Officials to the pages of this Journal, as containing the most recent announcements of the best reliable American Goods and Manufactures. The SCIENTIFIC AMERICAN is also on file in the Principal Cafes, Club Rooms, and Exchanges. Among the regular subscribers for THE SCIENTIFIC AMERICAN. SCIENTIFIC AMERICAN, Export Edition, are leading Commercial Houses in foreign cities, Engineers, Directors of Works, Government Officials, and other prominent influential persons. Regular files of this paper are also carried on all the principal lines of STEAMSHIPS, foreign and coastwise, leaving the port of New York.

No export publication sent from the United States

STEAMSHIPS, foreign and coastwise, leaving the port of New York.

New York with the control of New York was the coastwise, leaving the port of New York.

Export Edition. It is by far the most splendid, satisfactory, and superior Export Journal ever brought before the public. Its pages are so arranged as to permit the publication, at very low prices, or large and handsoniely displayed advertisements of American Goods and Manufactures. with Engravings, which are always attractive to foreign purchasers. The SCIENTIFIC AMERICAN, Export Edition, already enjoys the advertising patronage of many of the Great Manufacturing Establishments of this Country, who find it to be an UNRIV ALED MEDIUM FOR SECURING NEW ORDERS AND EXTENDING TRADE.

If you wish to increase your business, try, a CÜRING NEW ORDERS AND EXTENDING TRADE.

If you wish to increase your business, try a
handsome advertisement for one year, continuously, in
THE SCIENTIFIC AMERICAN, Export Edition. Rates,
\$50 a year for a full page; half page, \$00; quarter
page, \$175; one-eighth page, \$100. Half-yearly rates in
slightly increased proportion.
Published about the 20th of each month.
Single numbers of THE SCIENTIFIC AMERICAN, Export
Edition, 50 cents To be had at this office and at all the
news stores. Subscriptions, Five Dollars a year; sent,
postpaid, to all parts of the world.

MUNN & COm PUBLISHERS, 37 PARK ROW, NEW YORK

OPEN BACK PRESSES, STILES & PARKER PRESS CO., Middletown, Ct.



Small Tools of all kinds; GEAR WHEELS, parts of: MODELS, and materials of all kinds. Catalogues free. GOODNOW & WIGHTMAN, 176 Wash'n St., Boston, Mass.

J. LLOYD HAIGH,

# WIRE ROPE

of every description for Railroad and Mining Use, Elevators, Derricks, Rope Tramways, Transmission of Fower, etc. No. 81 John St.. N. Y. Send for price list. Plans and Estimates furnished for Suspension Bridges.

# MACHINISTS' TOOLS.

NEW AND IMPROVED PATTERNS. Send for new illustrated catalogue.

Lathes, Planers, Drills, &c.
NEW HAVEN MANUFACTURING CO.,
New Haven, Conn.

#### Lathes, Planers, Shapers Drills, Bolt and Gear Cutters, Milling Machines. Special Machinery. E. GOULD & EBERHARDT, Newark, N. J.

Leffel Water Wheels, 🏻 With recent improvements.

Prices Greatly Reduced. 8000 in successful operation. FINE NEW PAMPHLET FOR 1879,
Sent free to those interested.

James Leffel & Co.,
Springfield O James Leffel & Co, Springfield, O. 110 Liberty St., N. Y. City.

#### ICE AT \$1.00 PER TON The PICTET ARTIFICIAL ICE CO.,

LIMITED, Room 51, Coal and Iron Exchange, P. O. Box 3083, N. Y.

Direct Pumping Plan. Combines, with other advantages, over older systems, the following: 1. Secures by variable pressure a more reliable water supply for all purposes. 2. Less cost for construction. 3. Less cost for maintenance. 4. Less cost for daily supply by the use of Holly's Improved Pumping Machinery. 5. Affords the best fire protection in the world. 6. Largely reduces insurance risks and premiums. 7. Dispenses with fire engines, in whole or in part. 8. Reduces fire department expenses. For information by descriptive pamphlet, or otherwise, address the HOLLY MANUFACEURED CO. 7. pamphlet, or otherwise, address the HOLLY MANUFACTURING CO., Lockport, N. Y.



PERFECT

# **NEWSPAPER FILE**

The Koch Patent File, for preserving newspape magazines, and pamphilets, has been recently improvand price reduced. Subscribers to the SCIENTIFIC AERICAN and SCIENTIFIC AMERICAN SUPPLEMENT can supplied for the low price of \$1.50 by mail, or \$1.25 at office of this paper. Heavy board sides; inscript "SCIENTIFIC AMERICAN," in gilt. Necessary every one who wishes to preserve the paper. Address

MUNN & CO., Publishers Scientific American.

# THE TANITE CO., STROUDSBURG, PA. EMERY WHEELS AND CRINDERS. LONDON-98t. Andrews St., Holborn Viaduct, E. C. LIVERPOOL-42 The Temple, Dale St.

ROCK DRILLING MACHINES

AIR COMPRESSORS,

MANUFACTURED BY BURLEICHROCK DRILL CO.
SEND FOR PAMPHLET. FITCHBURG MASS.

DOGARDUS' PATENT UNIVERSAL ECCENTRIC MILLS—For grinding Bones, Ores, Sand, Old Crucibles, Fire Clay, Guanos, Oil Cake, Feed, Corn, Corn and Cob, Tobacco, Snuff, Sugar, Saits, Roots, Spices, Coffee, Cocoanut, Flaxseed, Asbestos, Mica, Spices, Coffee, Cocoanut, Flaxseed, Asbestos, Mica, Also for Paints, Printers' Inks, aste Blacking, etc., and W. THOMSON, successor to JAMES BOGARDUS, corner of White and Elm Sts., New York.

PATENTED ARTICLES, MACHINES, etc., manufactured in France according to the Laws by the Société Anonyme pour l'Exploitation de Brevets, il Rue de Flandre, Paris, France. References: Mackay Sewing Machine Association, Boston, Mass.



#### HARDWOOD LUMBER AND

### veneers.

Mahogany, Rosewood, Satinwood, French and American Walnut, Burl Veneers. Hungarian Ash, Amaranth, etc., etc. Manufacturers will find our stock unusually choice and prices low. Full line of Rare and Fancy Woods planed for Amateur's use.

GEO. W. READ & CO., 186 to 200 Lewis St., New York.

THE SKINNER CATATIONARY ENGINES PORTABLE & STATIONARY ENGINES &
FORST CLASS & CONOMICAL SKINNER & WOOD. ERIE. PA
SEE LLUSTRATED ADVENTISEMENT

GOOD PLAN.—THE MOST PROFITABLE WAY FOR dealing in stocks is by combining many orders and co-operating them as a whole, dividing profits pro rata among the shareholders, according to the market. Each customer thus secures all the advantages of immense capital and experienced skill, and can use any amount from \$10 to \$10,000 or more, with equal proportionate success. "New York Stock Reporter" and new circular mailed free, Full information for any one to operate successfully. LAWRENCE & CO., 57 Exchange Place, New York.



COPYRIGHTS, TRADE MARKS, ETC.

Messrs. Munn & Co., in connection with the publication of the Scientific American, continue to examine Improvements, and to act as Solicitors of Patents for

In this line of business they have had OVER THIRTY YEARS' EXPERIENCE, and now have unequaled facilities for the preparation of Patent Drawings, Specifications, and the Prosecution of Applications for Patents in the United States, Canada, and Foreign Countries. Messrs. Munn & Co. also attend to the preparation of Caveats, Trade Mark Regulations, Copyrights for Books, Labels, Reissues, Assignments, and Reports on Infringements of Patents. All business intrusted to them is done with special care and promptness, on very moderate terms.

We send free of charge, on application, a pamphlet containing further information about Patents and how to procure them; directions concerning Trade Marks, Copyrights, Designs, Patents, Appeals, Reissues, Infringements, Assignments, Rejected Cases, Hints on the Sale of Patents, etc.

Foreign Patents.—We also send, free of charge, a

Synopsis of Foreign Patent Laws, showing the cost and method of securing patents in all the principal countries of the world. American inventors should bear in mind that, as a general rule, any invention that is valuable to the patentee in this country is worth equally as much in England and some other foreign countries. Five patents-embracing Canadian, English, German, French, and Belgian—will secure to an inventor the exclusive monopoly to his discovery among about one HUNDRED AND FIFTY MILLIONS of the most intelligent people in the world. The facilities of business and steam communication are such that patents can be obtained abroad by our citizens almost as easily as at home. The expense to apply for an English patent is \$75; German, \$100; French, \$100; Belgian, \$100; Canadian, \$50.

Copies of Patents.-Persons desiring any patent issued from 1836 to November 26, 1867, can be supplied

When ordering copies, please to remit for the same as above, and state name of patentee, title of invention, and date of patent.

A pamphlet, containing full directions for obtaining United States patents sent free. A handsomely bound Reference Book, gilt edges, contains 140 pages and many engravings and tables important to every patentee and mechanic, and is a useful hand book of reference for everybody. Price 25 cents, mailed free.

Address MUNN & CO.

Publishers SCIENTIFIC AMERICAN, 37 Park Row, New York.

BRANCH OFFICE—Corner of F and 7th Streets,
Washington, D. C.

THE "Scientific American" is printed with CHAS. ENEU JOHNSON & CO.'S INK. Tenth and Lombard Sts., Philadelphia, and 50 Gold St., New York.